
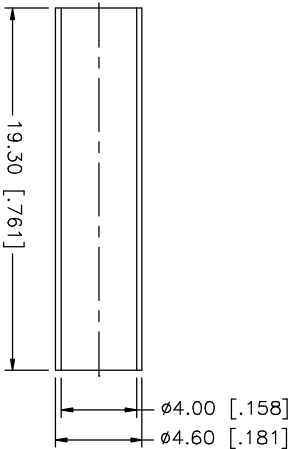
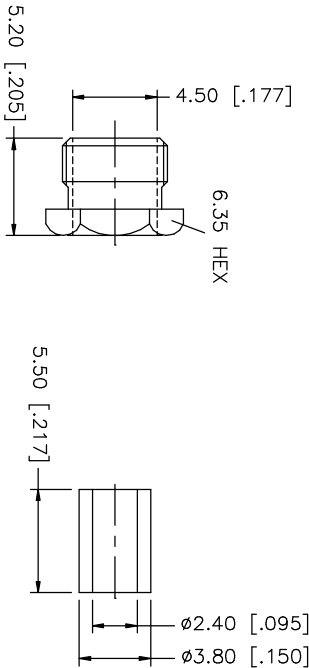

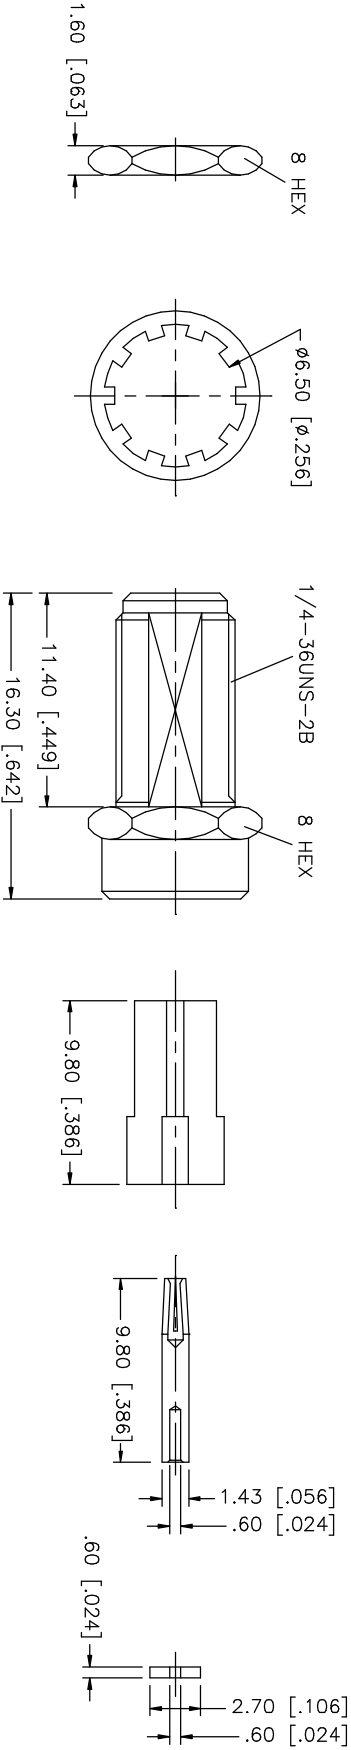


REV.	DATE	DESCRIPTION
NC	01/16/03	INITIAL RELEASE
A	06/11/03	ADD MOUNTING HOLE DIMS.

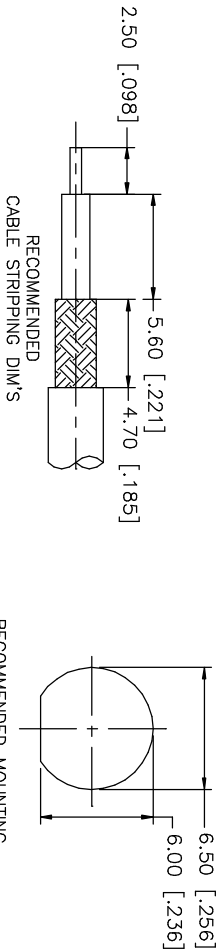

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.	REV.	SIZE	SCALE
8									
7	HEAT SHRINK								
6	FERRULE	COPPER	1						
5	HEX NUT	BRASS	1						
4	BARREL	BRASS	1						
3	CONTACT PIN	BRASS	1						
2	INSULATOR	TEFLON	1						
1	HOUSING/BODY	BRASS	1						
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020" CAD FILE: C:/132/132220.DWG DWG. NO.: 132220.DWG REV. A SIZE A SCALE NA									

Amphenol Connex

SMA BULKHEAD CRIMP JACK
(FOR RG-178B/U, 196/U CABLE)

132220