
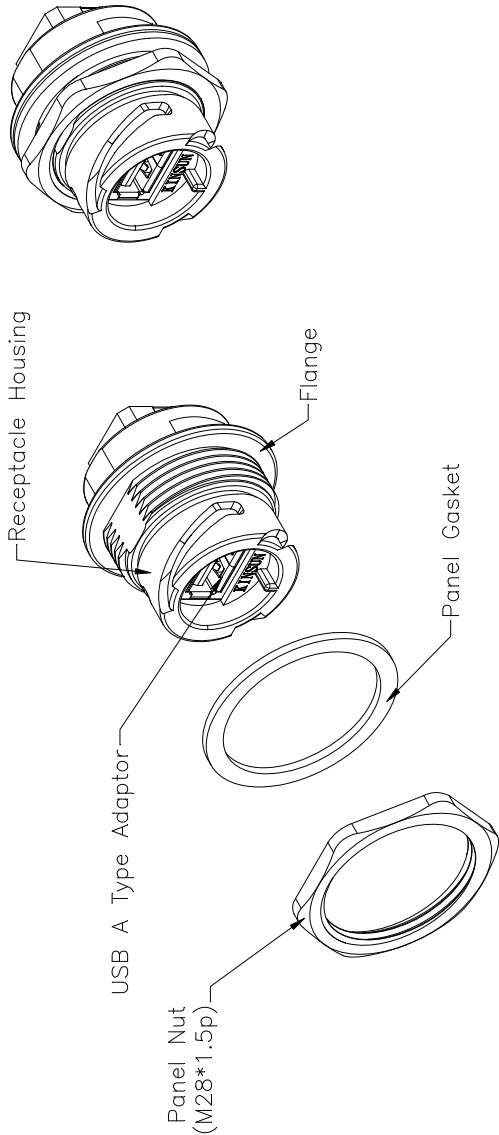
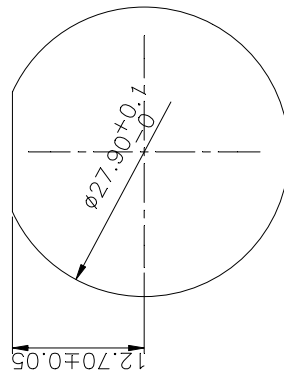
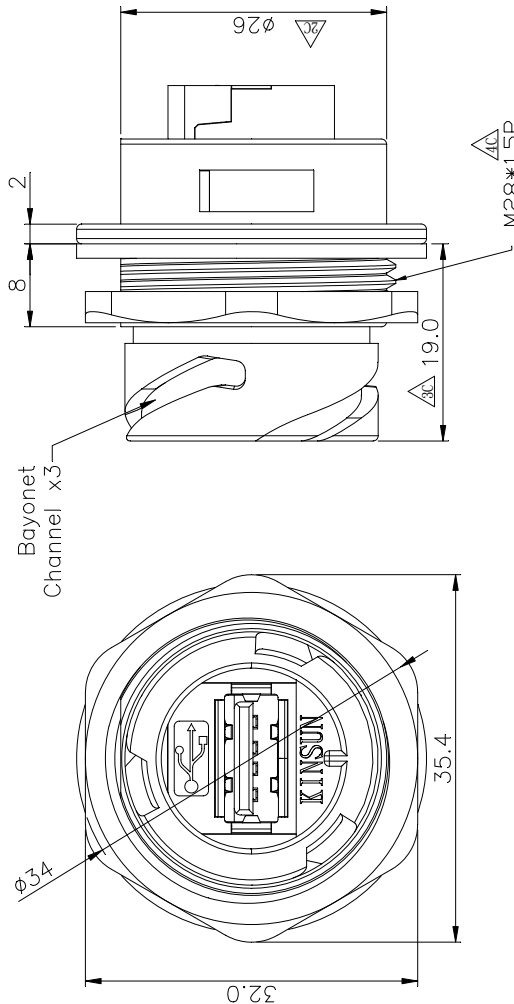


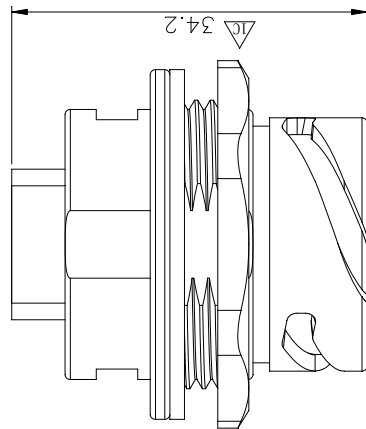

Electrical Specifications:

Meets USB2.0 specifications.
Current Rating : 1.5 A Max.
Insulator resistance : 1000 Megohms min .
Contact resistance : 30 m ohm Max.
DWV : 500v AC/60s Pin to Pin;1000v AC/60s Pin to shell.
Operating Temperature : -40°C TO +85°C

Material and Finish

Receptacle Housing : Zn Alloy 3,Nickel Plated
Panel Nut : Coper Alloy,Nickel Plated
Panel Gasket : Silicone
USB OVERMOLD : ABS, Black.
USB CONN : USB AF2.0
DURABILITY : 1500 Mating Cycles.
Connector can be front mounted to a maximum panel thickness of 3.2mm.

BOM:
30u 3353K00030

Panel Cut-Out

RoHS COMPLIANT

設計 DR.	Leon	核准 附圖	Marco	容許公差	TOLERANCE	品名	3353防水接頭(金屬USB)
	2015/01/06		2015/01/06	.XXX	±0.10	ARTICLE	
	版本說明	REVISION NOTE		.XX	±0.25		
	— — — — —	修正 4 C 尺寸 — — — — —		.X	±0.38	圖號	3353K00030
				X	±0.50	DWG NO.	
				ANG	±3°	單位	mm
						比例	2/1
						版次	1/1
						版本	C

