
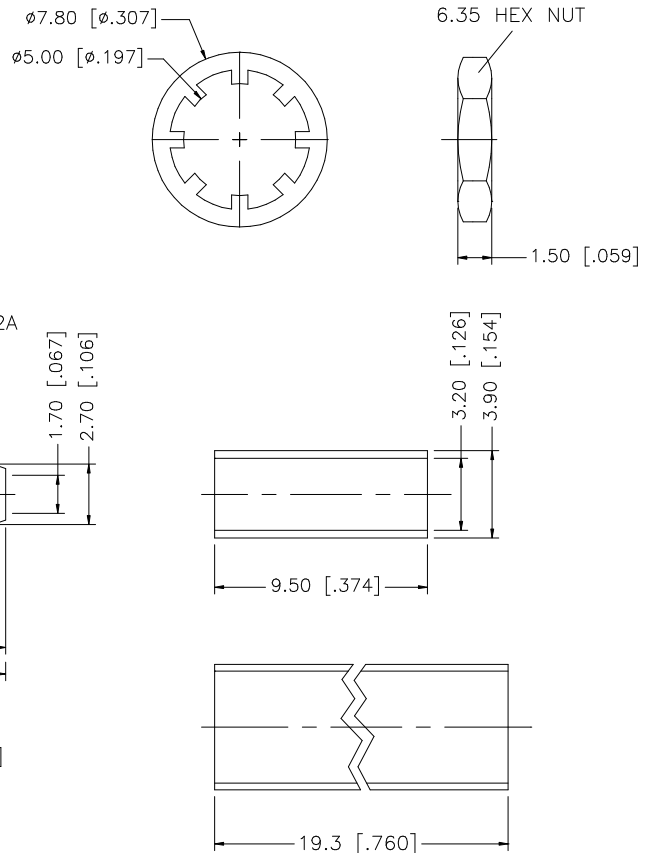
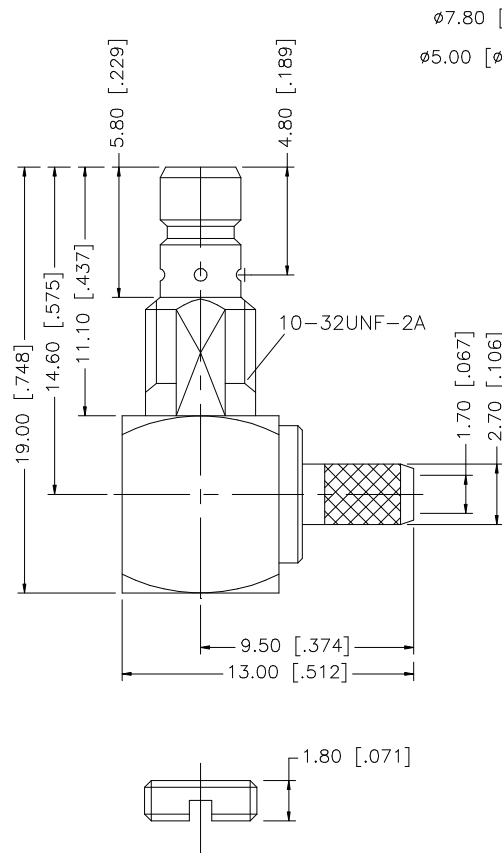
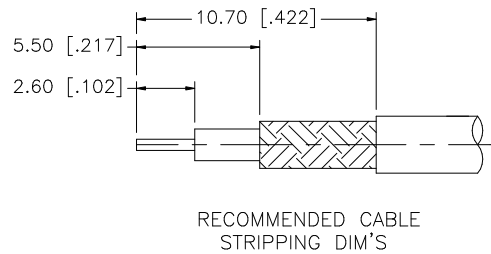


REV.	DATE	DESCRIPTION
NC	04/29/99	INITIAL RELEASE
A	05/08/07	REVISE BARREL, FERRULE DIMS, UPDATE DRAWING FORMAT



- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
7	COVER	BRASS	GOLD	1		DRAWN	G.R.S.						05/08/07	
6	FERRULE	COPPER	GOLD	1		CHECKED			PART DESCRIPTION					
5	HEX NUT	BRASS	GOLD	1		ISSUED			SMB R/A BULKHEAD CRIMP JACK (FOR RG-174/U, 188A/U, 316/U)					
4	LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1		PART NO.					
3	CONTACT PIN	BRASS	GOLD	1					142233					
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO.					
1	BODY	BRASS	GOLD	1					142233.DWG					
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/142/142233.DWG	REV.		A	SIZE	A	SCALE	NA

Amphenol Connex

SMB R/A BULKHEAD CRIMP JACK
(FOR RG-174/U, 188A/U, 316/U)

142233

DWG. NO. 142233.DWG

REV. A SIZE A SCALE NA