

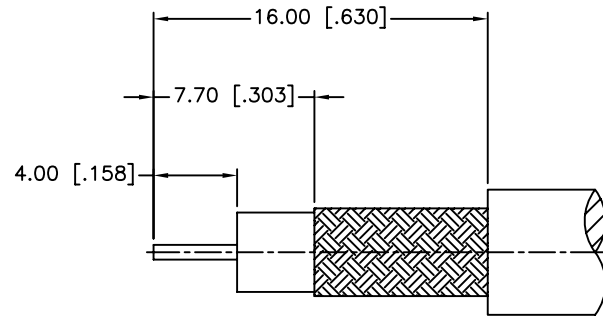
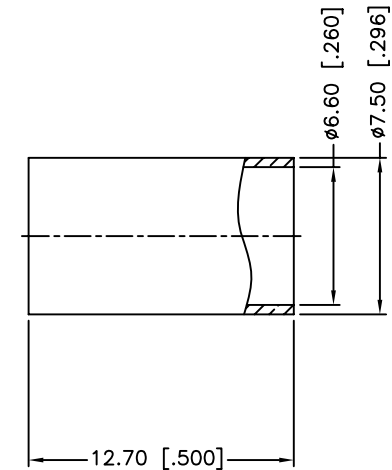


REV	DATE	FOR NO	DESCRIPTION
NC	10/05/10	-	INITIAL RELEASE

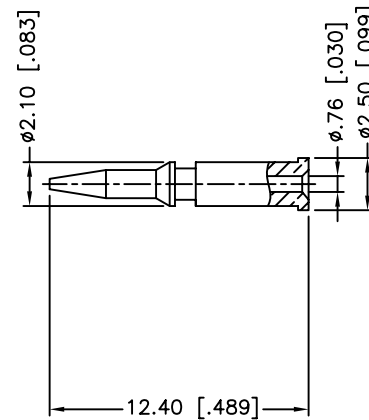

RECOMMENDED
CABLE STRIPPING DIM'S

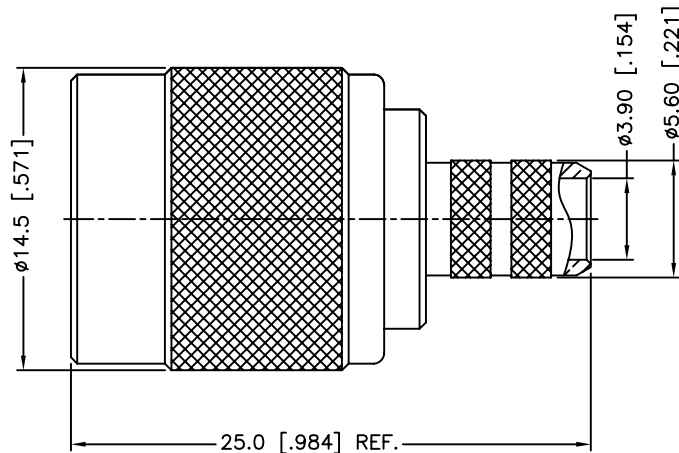

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG					10/05/10
7	WASHER	BRASS	NICKEL	1		CHECKED			PART DESCRIPTION TNC CRIMP PLUG (FOR RG-59/U CABLE)			
6	RING	DELTRIN	NATURAL	1		ISSUED						
5	RETAINER RING	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 122110			
4	GASKET	RUBBER	RED	1								
3	INSULATOR	DELTRIN	NATURAL	1		CAD FILE	C:/CONNEX/122110.DWG		DWG. NO. 122110.DWG REV. NC SIZE A SCALE NA			
2	BODY	BRASS	NICKEL	1		DO NOT SCALE DRAWING						
1	SHELL	BRASS	NICKEL	1								
	DESCRIPTION	MATERIAL	FINISH	QTY								