

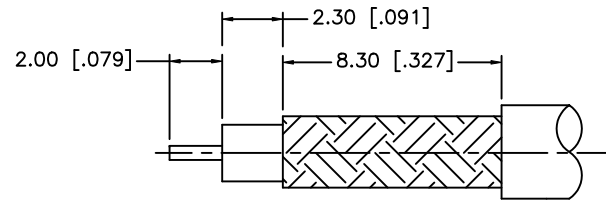
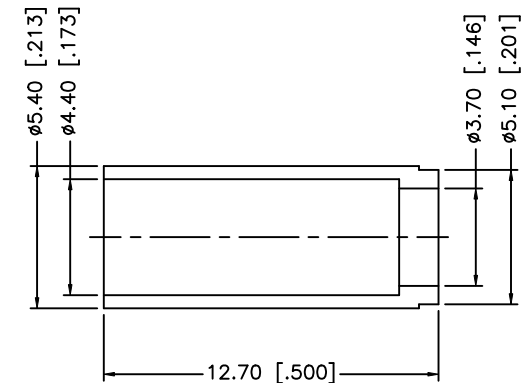


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/31/00	–	INITIAL RELEASE
A	11/20/08	–	UPDATE DRAWING FORMAT, REVISE NOTES 1 AND 2.

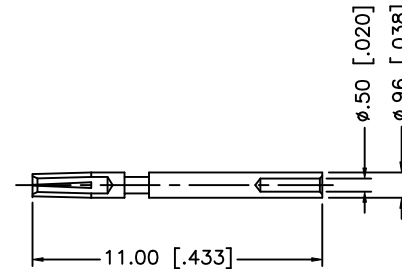

RECOMMENDED
CABLE STRIPPING DIM'S

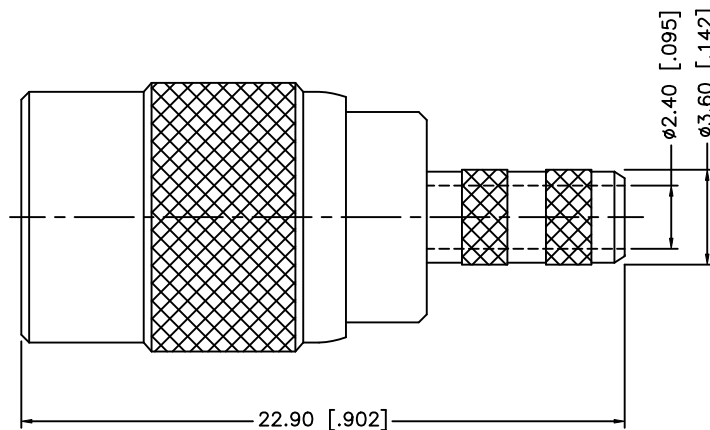

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	11/20/08						
7						CHECKED								
6						ISSUED			PART DESCRIPTION SMB SNAP LOCK PLUG (FOR AT&T 735A CABLE)					
5						SHEET	1 OF 1							
4	FERRULE	COPPER	NICKEL	1				PART NO. 142289						
3	CONTACT PIN	BER. COPPER	GOLD	1										
2	INSULATOR	PTFE	NATURAL	1				DWG. NO. 142289.DWG						
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/142/142289.DWG		REV.	A	SIZE	A	SCALE