

5

4

3

2

1


NOTES:

1. MATERIALS AND FINISHES:
BNC STR PLUG - BRASS, NICKEL PLATING
BNC STR JACK - BRASS, NICKEL PLATING
CABLE - RG 142


2. ELECTRICAL:
A. IMPEDANCE: 50 OHM

3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 95-850-254-XXX AND DATE CODE"

SCALE 0.400

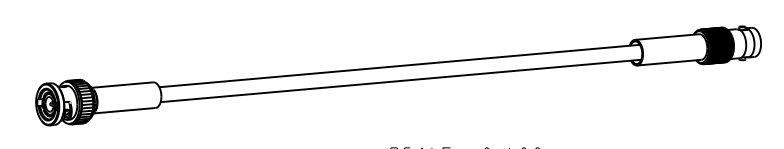

LENGTH 'L' (SEE TABLE)

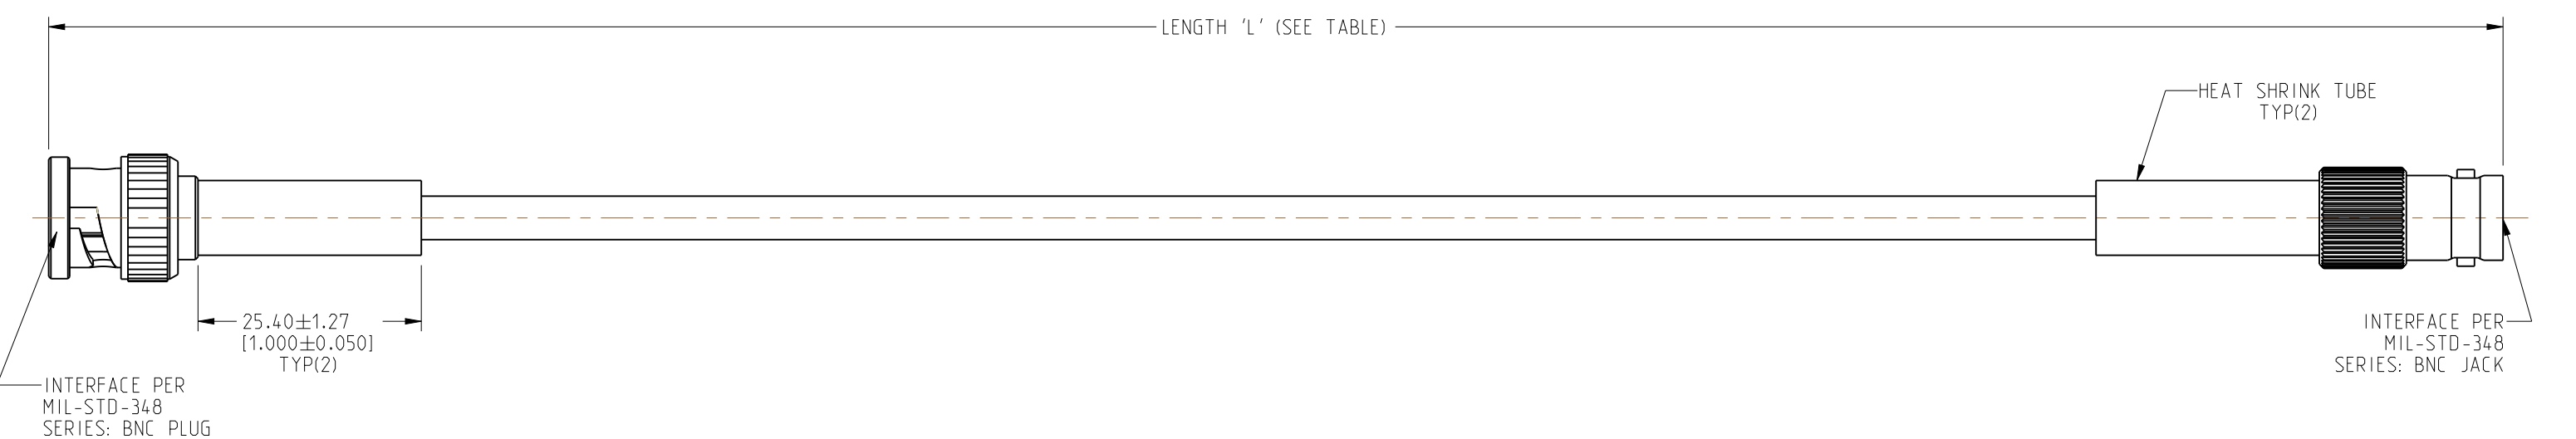

LENGTH TABLE

PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH 'L' IN INCHES [METERS]
95-850-254-012	-	12.00 [0.305]
95-850-254-018	-	18.00 [0.457]
-	95-850-254M050	19.69 [0.500]
95-850-254-024	-	24.00 [0.610]
95-850-254-036	-	36.00 [0.914]
-	95-850-254M100	39.37 [1.000]
95-850-254-048	-	48.00 [1.219]

TOLERANCE TABLE

LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS:

☒ FREQUENCY: DC - 6 GHz


☒ CONTINUITY

☐ VSWR: ____ 1 MAX.

☒ HI-POT: 1000 VRMS

☐ INS. LOSS: ____ dB MAX.

☐ OTHER

THIRD ANGLE PROJ. 

REFERENCE

EAR# 10171

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE METRIC [INCHES] AND TOLERANCES ARE:
<0.5mm = ±0.05mm [$<0.020 = \pm 0.002$]
>0.5 - 6mm = ±0.1mm [$>0.020 - 0.236 = \pm 0.004$]
>6.00 - 30mm = ±0.2mm [$>0.236 - 1.181 = \pm 0.008$]
>30.00 - 120mm = ±0.3mm [$>1.181 - 4.725 = \pm 0.012$]

ANGLES = ±1°

MATERIAL
SEE NOTES

ENGINEER CLEMENT

DATE 08-OCT-20

TITLE
BNC STR PLUG TO
BNC STR JACK
USING RG 142 CABLE
VARIOUS LENGTH

SHEET NO. 2 OF 2

SCALE: 1.4:1.0

Amphenol RF

SIZE B

DRAWING NO. 95-850-254-XXX
ITEM NO. 95-850-254-XXX
PART NO. 95-850-254-XXX

REV A

5

4

3

2

1

Downloaded from [Arrow.com](#)