
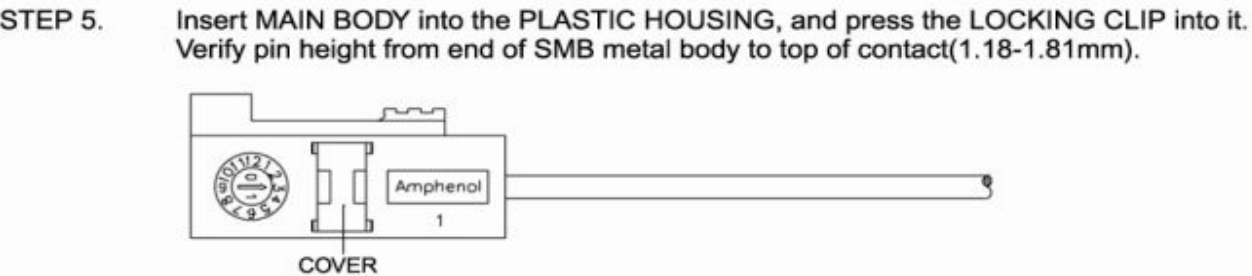
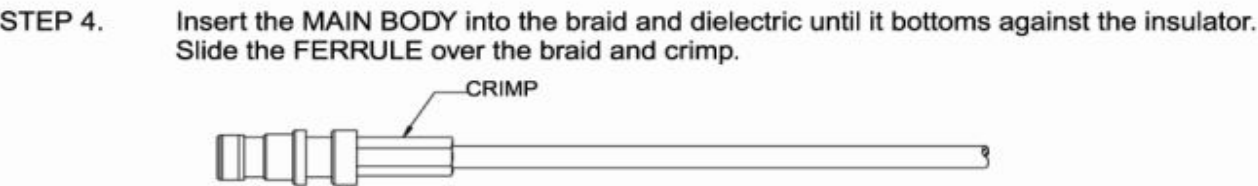
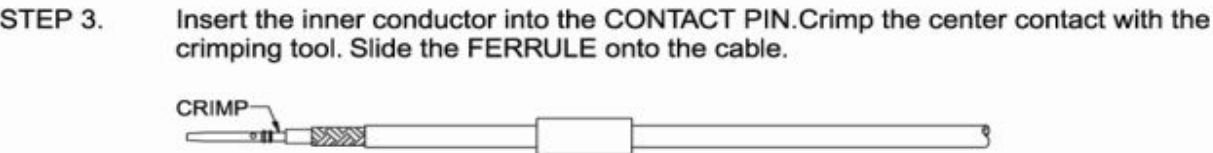
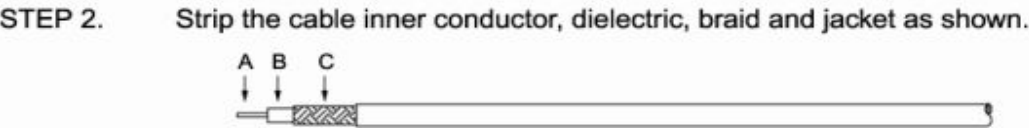


Straight Female(J) FAKRA Cable Assembly Instructions (FAKRA C2)

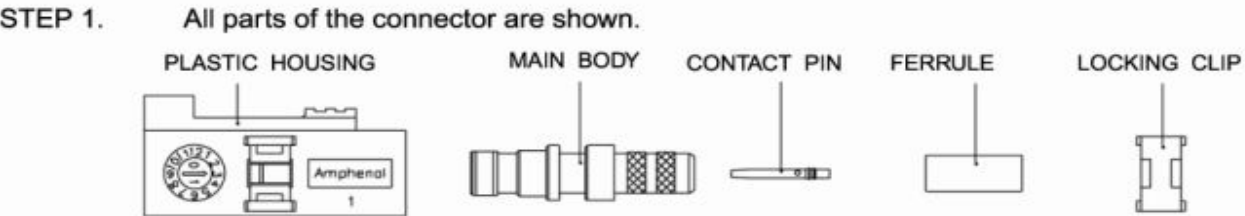

Cable Group	Stripping Length(mm)			Center Contact Crimp Tool	Ferrule Crimp Size
	A	B	C		
1	.118"(3 mm)	.110"(2.8 mm)	.205"(5.2 mm)	AFM8	Hex .128"(3.25 mm)
4	.118"(3 mm)	.067"(1.7 mm)	.327"(8.3 mm)	AFM8	Hex .213"(5.41 mm)
9	.095"(2.4 mm)	.228"(5.8 mm)	.224"(5.7 mm)	AFM8	Hex .128"(3.25 mm)
10	.118"(3 mm)	.102"(2.6 mm)	.205"(5.2 mm)	AFM8	Hex .128"(3.25 mm)

Please refer to FAKRA catalog for recommended tools.

Amphenol RF

Danbury, CT, USA

Tainan, Taiwan

Shenzhen, China

www.amphenolrf.com

A				RELEASE TO MFG		7/25/2007	46692	DRAWN BY	O. McPHERSON	7/23/2007	THIS DRAWING CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF AMPHENOL CORPORATION. THIS DRAWING IS CONFIDENTIAL AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF AMPHENOL CORPORATION.	TITLE: GENERAL ASSEMBLY INSTRUCTION FOR GEN 2.0 STRAIGHT FAKRA JACKS (C2)	CODE ID: 74868		SCALE: NONE		SHEET: 1 of 1	
REV				DESCRIPTION		DATE	ECO	ENGINEER	B.C. GLEISSNER	7/23/2007			Drawing No.		349-50782		Rev	
				REVISIONS				MANAGER	O. BARTHELMES	7/25/2007			REFERENCE: Page 19 OF Version 2.0 catalog		CAD FILE: I:\AI\349-50782		A	