
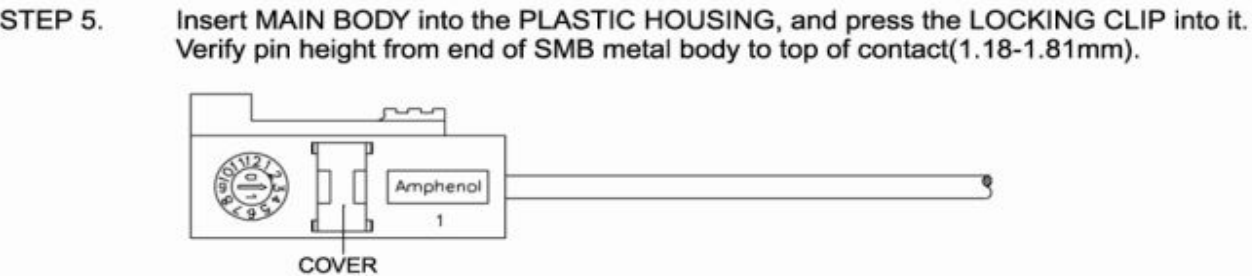
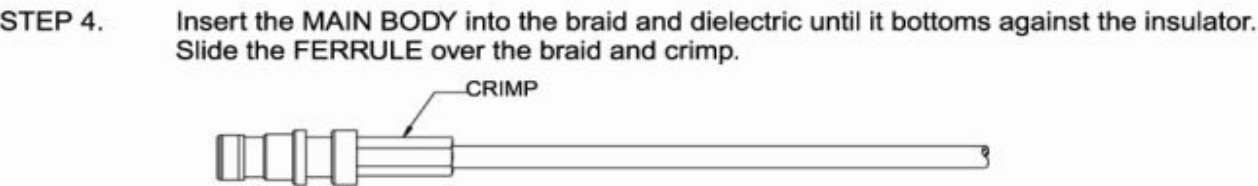
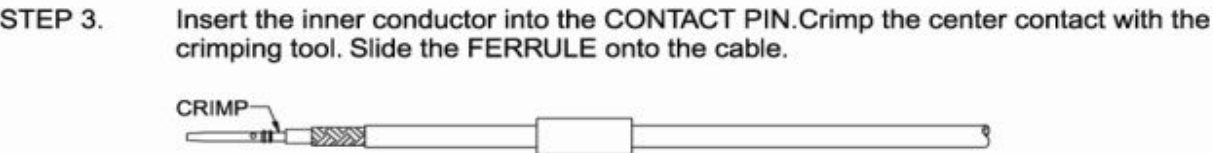
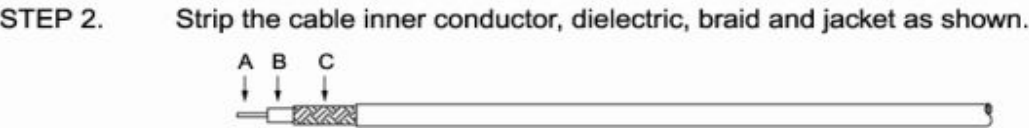


Straight Female(J) FAKRA Cable Assembly Instructions (FAKRA C2)

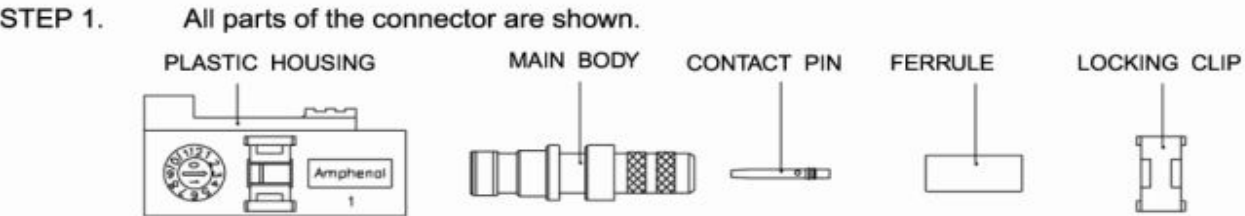

Cable Group	Stripping Length(mm)			Center Contact Crimp Tool	Ferrule Crimp Size
	A	B	C		
1	.118"(3 mm)	.110"(2.8 mm)	.205"(5.2 mm)	AFM8	Hex .128"(3.25 mm)
4	.118"(3 mm)	.067"(1.7 mm)	.327"(8.3 mm)	AFM8	Hex .213"(5.41 mm)
9	.095"(2.4 mm)	.228"(5.8 mm)	.224"(5.7 mm)	AFM8	Hex .128"(3.25 mm)
10	.118"(3 mm)	.102"(2.6 mm)	.205"(5.2 mm)	AFM8	Hex .128"(3.25 mm)

Please refer to FAKRA catalog for recommended tools.

Amphenol RF

Danbury, CT, USA
Tainan, Taiwan
Shenzhen, China
www.amphenolrf.com

					APPROVAL		DATE	THIS DRAWING CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF AMPHENOL CORPORATION. THIS DRAWING IS CONFIDENTIAL AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF AMPHENOL CORPORATION.		TITLE: GENERAL ASSEMBLY INSTRUCTION FOR GEN 2.0 STRAIGHT FAKRA JACKS (C2)		CODE ID: 74868	www.amphenolrf.com		
A	RELEASE TO MFG		7/25/2007	46692	DRAWN BY	O. McPHERSON						7/23/2007	SCALE: NONE	SHEET: 1 of 1	
REV	DESCRIPTION		DATE	ECO	ENGINEER	B.C. GLEISSNER						7/23/2007	Drawing No.		Rev
REVISIONS					MANAGER	O. BARTHELMES						7/25/2007	REFERENCE: Page 19 OF Version 2.0 catalog		CAD FILE: I:\AI\349-50782