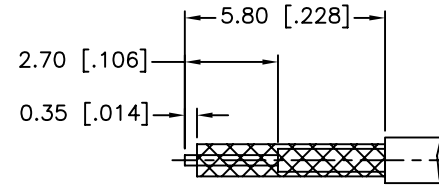


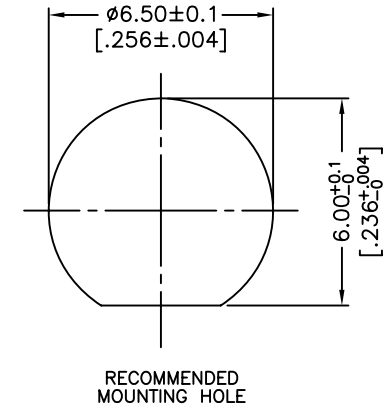
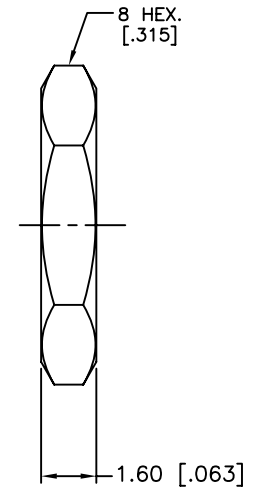
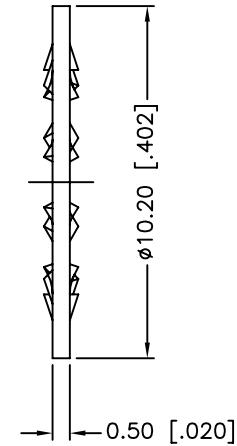
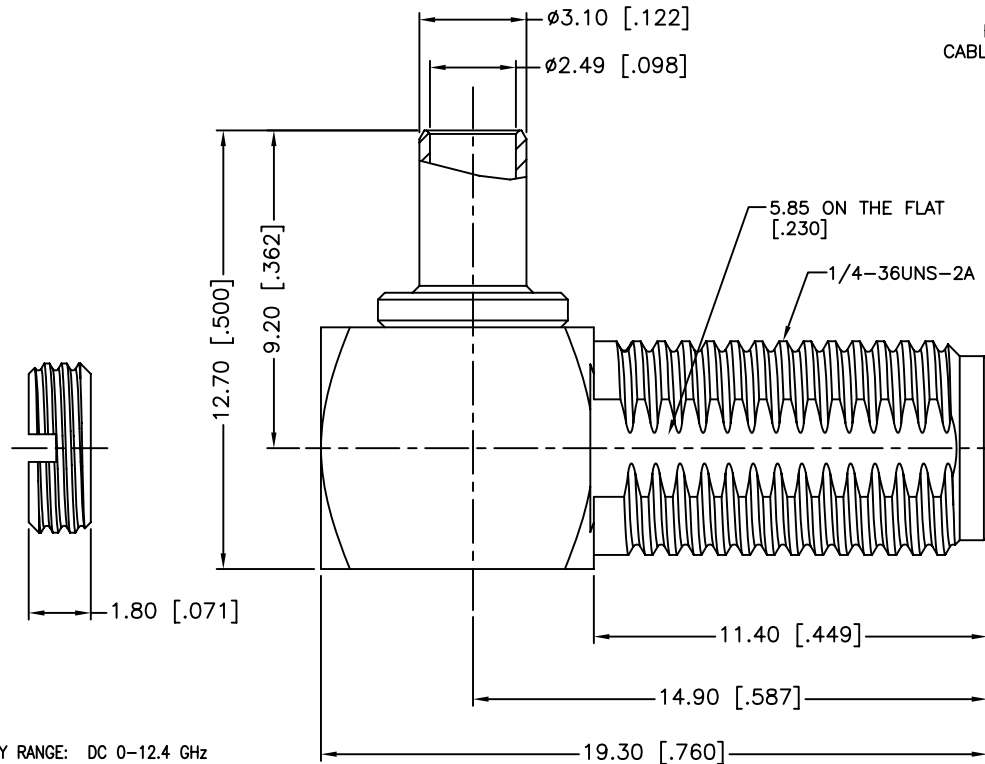


REV.	DATE	FOR NO.	DESCRIPTION
NC	06/30/11	XXXXX	INITIAL RELEASE

RECOMMENDED
CABLE STRIPPING DIM'SRECOMMENDED
MOUNTING HOLE

1. FREQUENCY RANGE: DC 0-12.4 GHz
2. DIELECTRIC WITHSTANDING VOLTAGE: 250 VRMS, MIN.
3. CRIMPED FERRULE
HEX CRIMP SIZE .105"
4. CONTACT PIN TO SOLDER
5. MAX. PANEL THICKNESS=3.2 mm

	DESCRIPTION	MATERIAL	FINISH	QTY
7	INNER FERRULE	BRASS	GOLD	1
6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	COVER	BRASS	GOLD	1
3	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY WITH BARREL	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mmUNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/30/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/132427.DWG

Amphenol Connex

PART DESCRIPTION

SMA R/A BULKHEAD JACK
(FOR 1.32 MM CABLE)

PART NO.

132427

DWG. NO. 132427.DWG

REV. NC

SIZE A

SCALE NA