
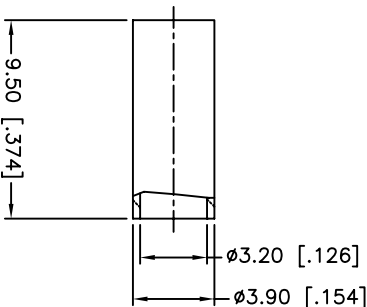
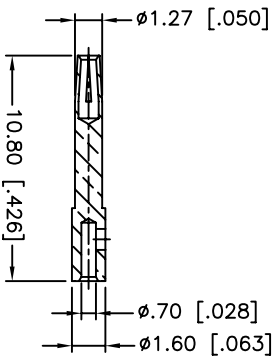
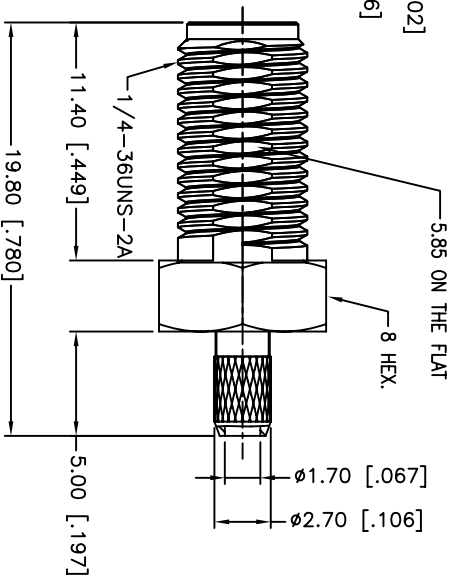
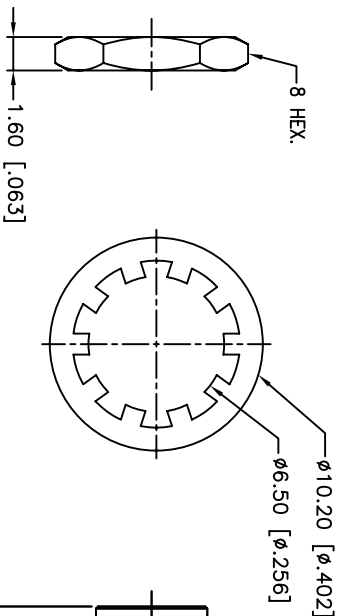
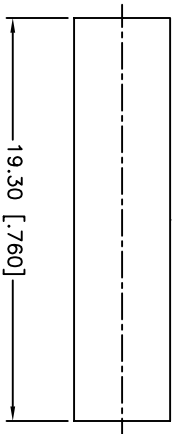


REV.	DATE	ECR NO.	DESCRIPTION
A	01/29/00	-	UPDATE FERRULE
B	01/02/01	-	MODIFY BARREL AND HEAT SHRINK
C	04/31/03	-	UPDATE DRAWING FORMAT
D	04/20/08	100009	REVISE BARREL O.D., FERRULE O.D. AND I.D.
	05/20/11	2159	CHANGE FLATS ON BULKHEAD TO ALIGN WITH THE POINT ON THE HEX NUT

RECOMMENDED
CABLE STRIPPING DIM'S

RECOMMENDED
MOUNTING HOLE



NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS=3.2mm

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION
HEAT SHRINK TUBING	BRASS	BLACK	1		DRAWN	05/20/11	Amphenol Connex SMA BULKHEAD CRIMP JACK (FOR RG-174/U,188A/U,316/U CABLE)
FERRULE	BRASS	GOLD	1		CHECKED		
HEX NUT	BRASS	GOLD	1		ISSUED		
LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1	
CONTACT PIN	BER. COPPER	GOLD	1				
INSULATOR	PTFE	NATURAL	1				
BODY	BRASS	GOLD	1				
DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CD FILE		PART NO.
					F:/CONNEX/132119.DWG		132119
					DWG. NO.		
					132119.DWG		
					REV. D		
					SIZE A		
					SCALE NA		