


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/18/10	XXXXXX	INITIAL RELEASE

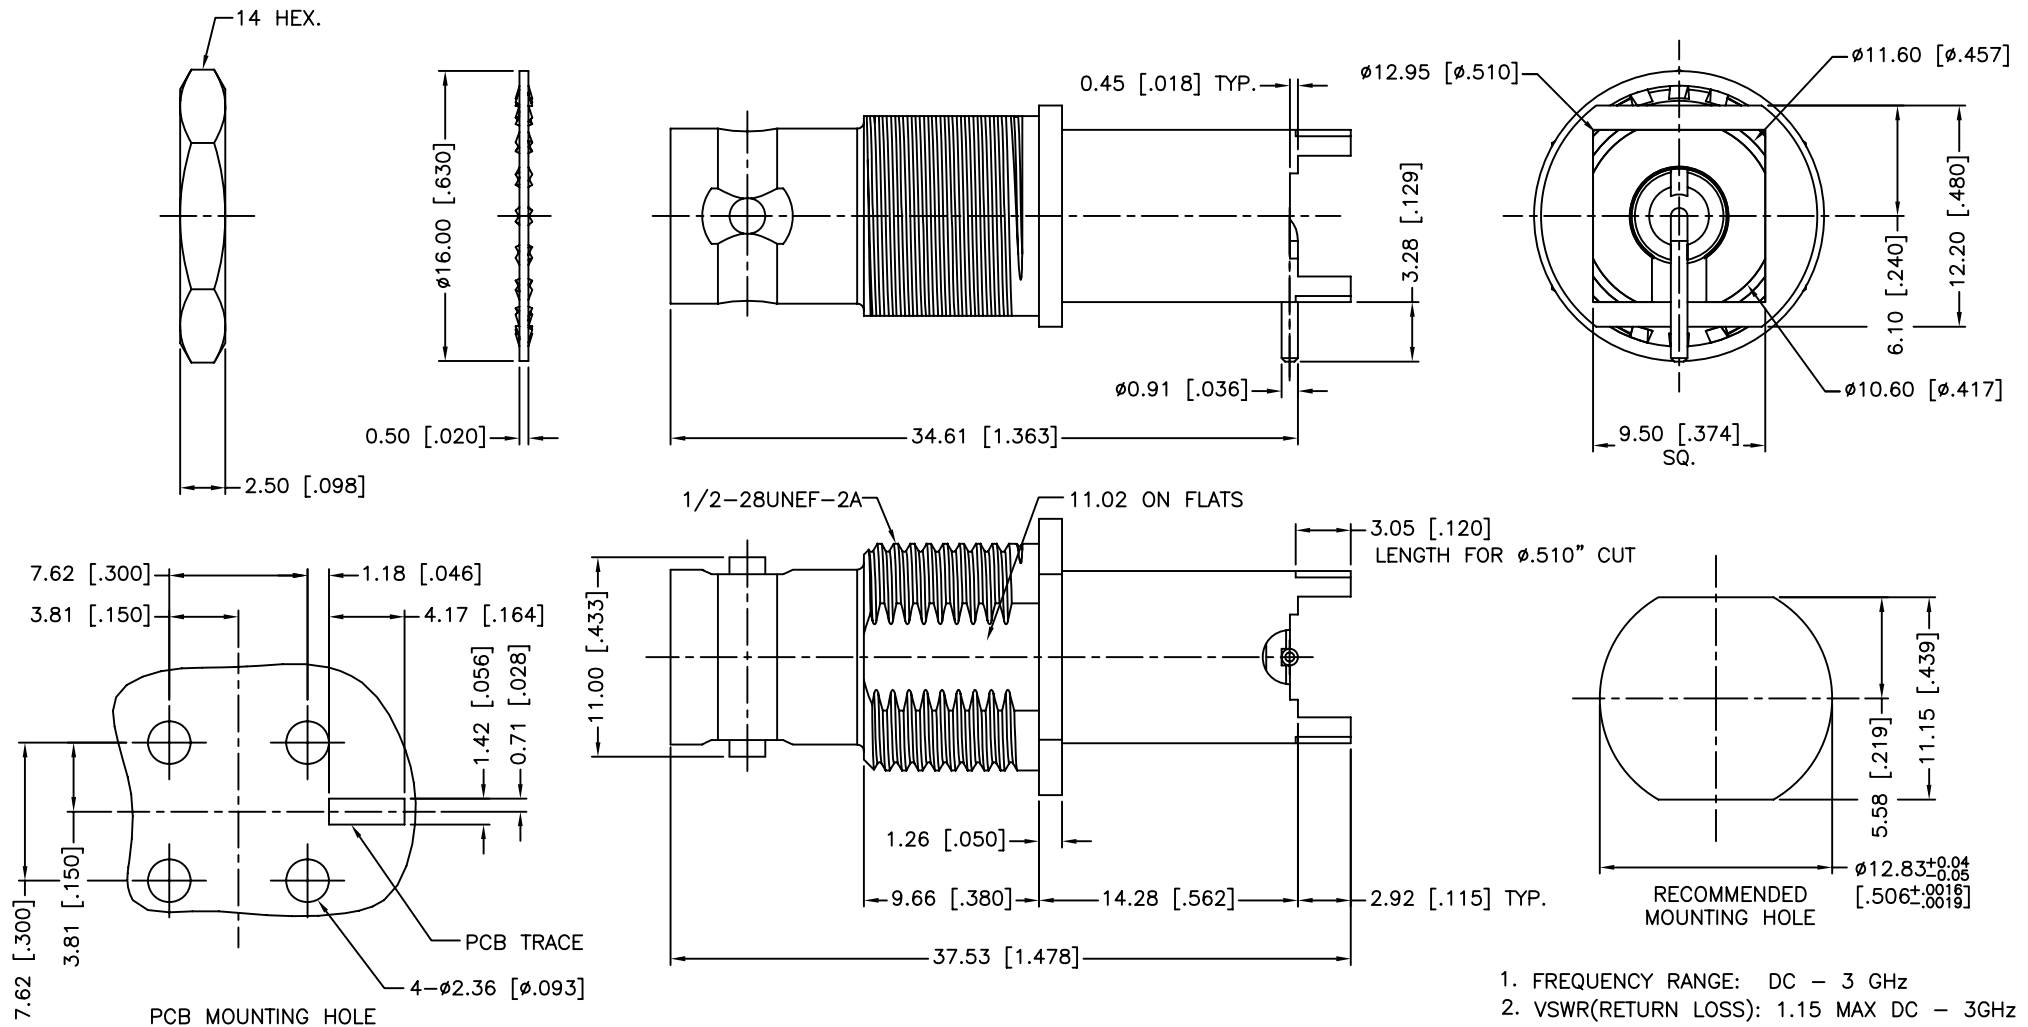

1. FREQUENCY RANGE: DC – 3 GHz
2. VSWR(RETURN LOSS): 1.15 MAX DC – 3GHz
3. MAX. PANEL THICKNESS=6mm

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	MAIN BODY
2	NICKEL	BRASS	LOCK RING
3	GOLD	BERYLLIUM COPPER	CONTACT PIN
4	NATURAL	PTFE	INSULATOR
5	GOLD	BRASS	CONTACT-REAR
6	NATURAL	PTFE	INSULATOR
7	NICKEL	PHOSPHOR BRONZE	LOCK WASHER
8	NICKEL	BRASS	HEX. NUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	05/18/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/112803.DWG	

Amphenol Connex

PART DESCRIPTION

BNC P.C. MOUNT RECEPT. BULKHEAD JACK.
WITH A BENT SMT CONTACT- 75 ohm

PART NO.

112803

DWG. NO. 112803.DWG

REV. NC

SIZE A

SCALE NA