


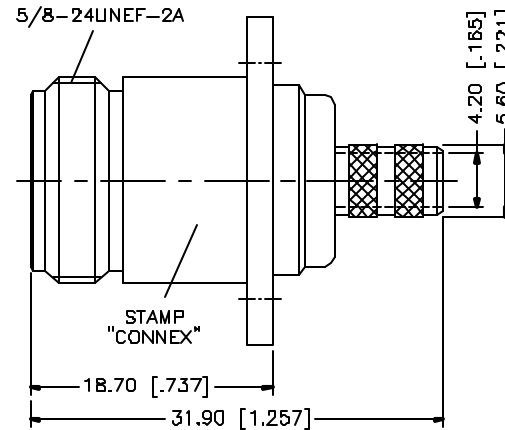
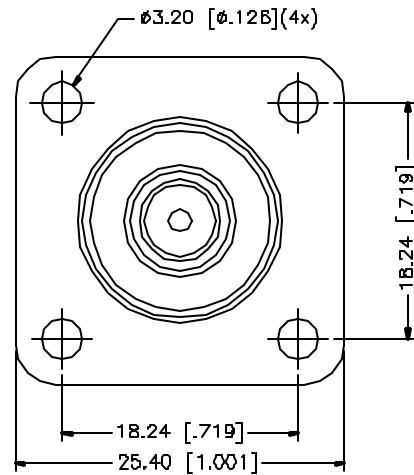


REV.	DATE	DESCRIPTION
A	11/22/04	INITIAL RELEASE

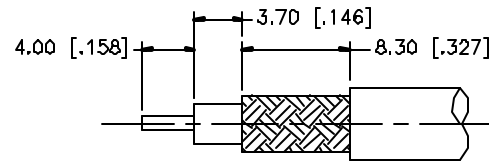

NOTE:

- 1 CRIMPED FERRULE
HEX CRIMP SIZE .255"
- 2 CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8					DRAWN	G.R.S	11/22/04					
7					CHECKED							
6					ISSUED				PART DESCRIPTION N PANEL CRIMP JACK (FOR 8X, LMR240 CABLE)			
5	FERRULE	COPPER	NEXCOTE		1	SHEET	1 OF 1					
3	CONTACT PIN	PHOS BRONZE	GOLD	1					PART NO. 172319			
2	INSULATOR	TEFLON	NATURAL	1								
1	BODY	BRASS	NEXCOTE	1					DWG NO 172319.DWG REV A SIZE A SCALE NA			
DESCRIPTION MATERIAL FINISH QTY				C:/172/172319 DWG								