

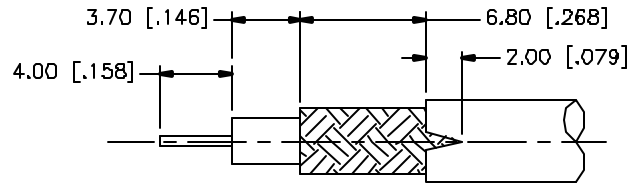
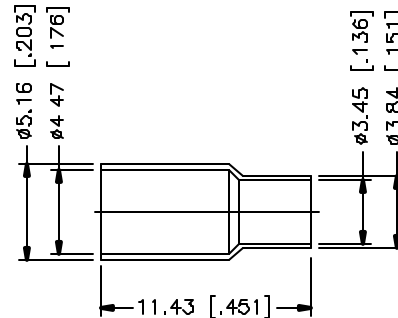
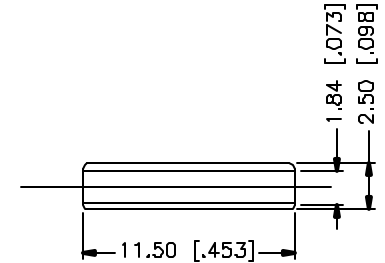


REV.	DATE	DESCRIPTION
NC	03/19/05	INITIAL RELEASE

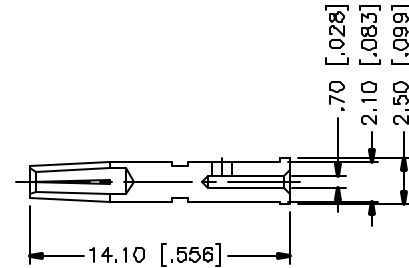

RECOMMENDED
CABLE STRIPPING DIM'S

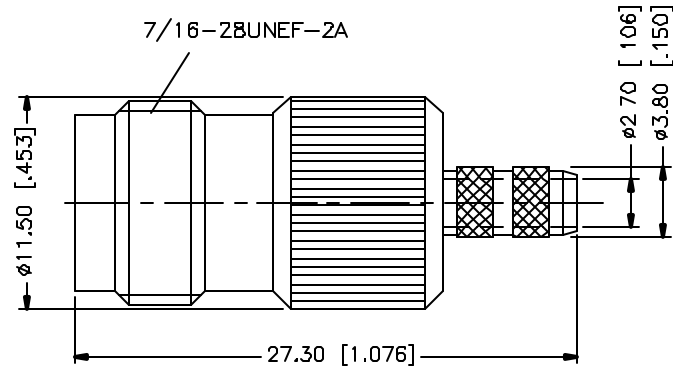

NOTE

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMP CONTACT PIN
HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: 0.020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S	05/15/05						
6						CHECKED				PART DESCRIPTION TNC CRIMP JACK (FOR RG-316/U DOUBLE BRAID CABLE)				
5						ISSUED								
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1			PART NO. 122377				
3	CONTACT PIN	PHOS. BRONZE	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 122377.DWG					
1	BODY	BRASS	NICKEL	1										
DESCRIPTION MATERIAL FINISH QTY					DO NOT SCALE DRAWING		CAD FILE C:/122/122377.DWG		REV. NC		SIZE A		SCALE NA	