
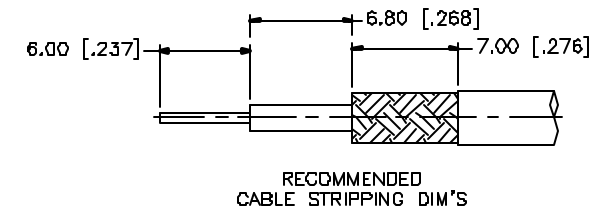



REV	DATE	DESCRIPTION
NC	03/08/05	INITIAL RELEASE

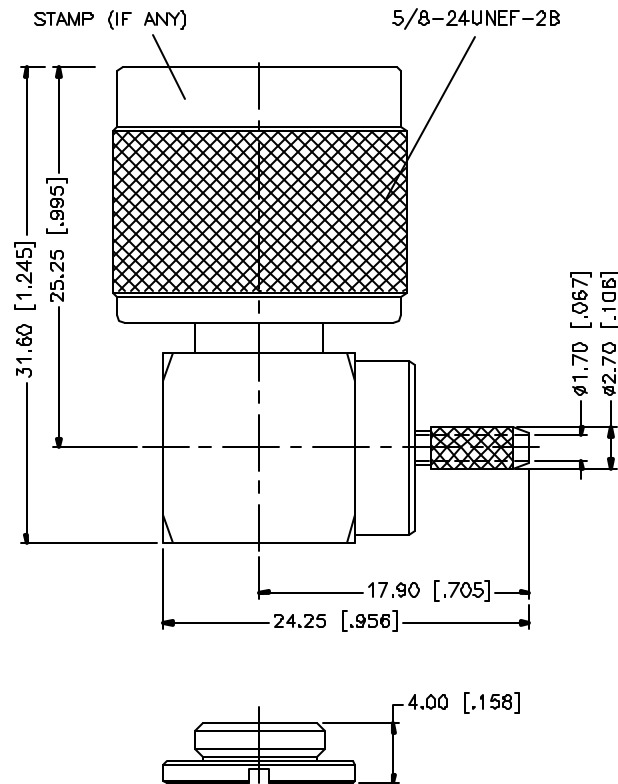

NOTE:

1. CRIMPED FERRULE
HEX. CRIMP SIZE 151"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8						DRAWN	G.R.S	03/08/05									
7						CHECKED				PART DESCRIPTION N R/A CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)							
6						ISSUED											
5	CLAMP NUT	BRASS	NEXCOTE	1		SHEET	1 OF 1			PART NO. 172245							
4	FERRULE	COPPER	NEXCOTE	1													
3	CONTACT PIN	BRASS	GOLD	1													
2	INSULATOR	TEFLON	NATURAL	1													
1	BODY	BRASS	NEXCOTE	1													
					CAD FILE		C:/172/172245.DWG		DWG NO		172245.DWG	REV	NC	SIZE	A	SCALE	NA
					DESCRIPTION		MATERIAL		FINISH		QTY						