

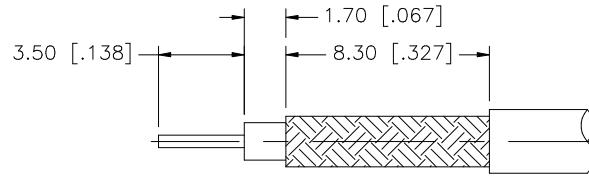
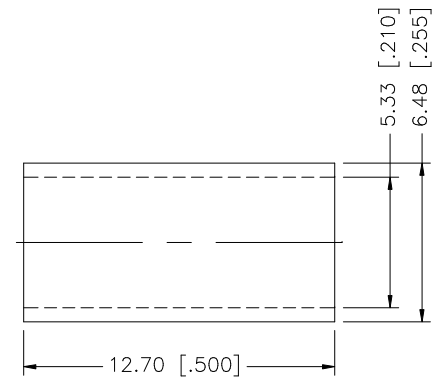


REV.	DATE	DESCRIPTION
NC	01/29/03	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

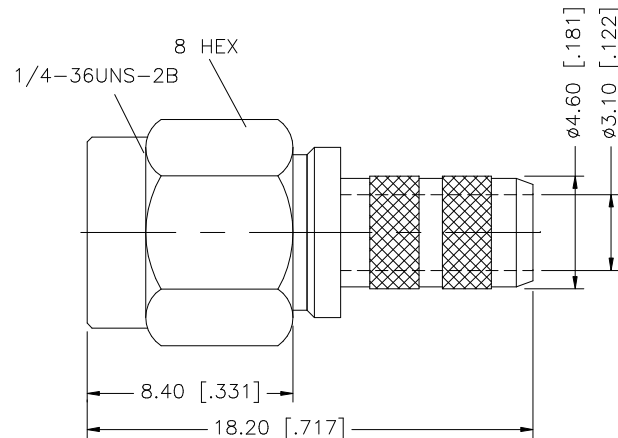

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	01/29/03							
7						CHECKED									
6	FERRULE	COPPER	NICKEL	1			ISSUED				PART DESCRIPTION SMA CRIMP PLUG (FOR RG-58C/U, 58/U CABLE)				
5	GASKET	SILICONE	RED	1			SHEET	1 OF 1							
4	CONTACT PIN	BRASS	GOLD	1						PART NO. 132113N					
3	RETAINER RING	BER. COPPER	NATURAL	1											
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO. 132113N.DWG					
1	SHELL/BODY	BRASS	NICKEL	1											
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE C:/132/132113.DWG		REV. NC			SIZE A	SCALE NA	