

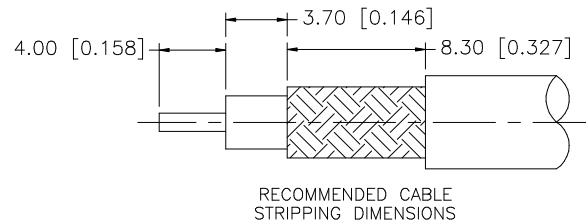



REV.	DATE	DESCRIPTION
A	05/24/04	UPDATE DRAWING FORMAT

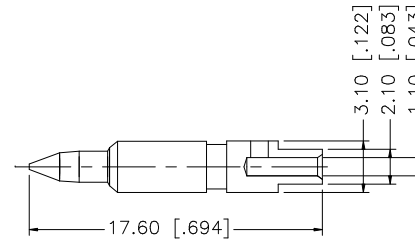

RECOMMENDED CABLE
STRIPPING DIMENSIONS

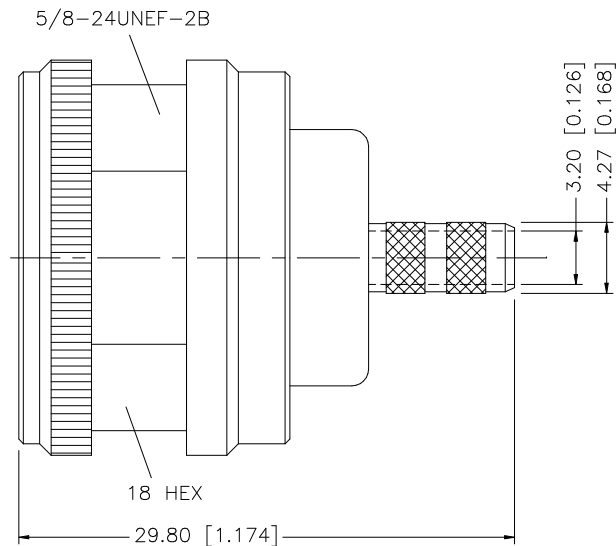

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex									
8						DRAWN	G.R.S.					05/24/04					
7						CHECKED											
6	FERRULE	BRASS	NEXCOTE	1			ISSUED		PART DESCRIPTION								
5	CONTACT PIN	BRASS	GOLD	1			SHEET	1 OF 1	N CRIMP PLUG (FOR RG-55/U, 142A/U, 223/U, 400/U CABLE)								
4	GASKET	SILICON	RED	1					PART NO.								
3	INSULATOR	TEFLON	NATURAL	1					172142-11								
2	BARREL	BRASS	NEXCOTE	1		CAD FILE	C:/172/172142-11.DWG	DWG. NO.		172142-11.DWG	REV.	A	SIZE	A	SCALE	NA	
1	BODY	BRASS	NEXCOTE	1													
	DESCRIPTION	MATERIAL	FINISH	QTY													