


REV.	DATE	DESCRIPTION
A	06/05/03	UPDATE DRAWING FORMAT
B	11/13/06	MODIFY BARREL O.D. TO 2.7mm

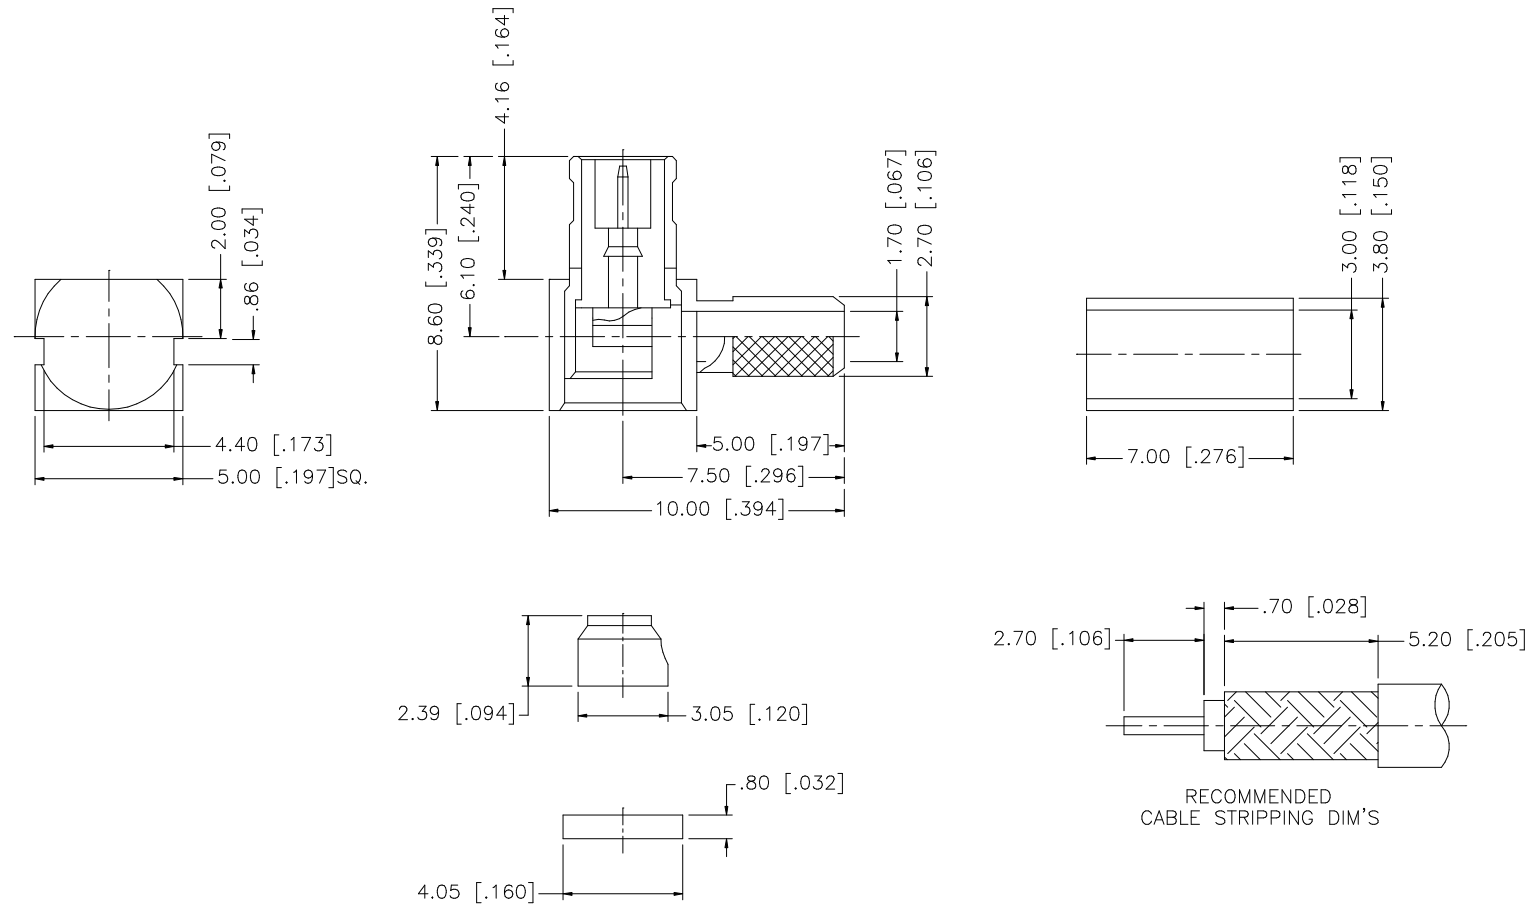

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
8						DRAWN	G.R.S.						11/13/06	
7						CHECKED								PART DESCRIPTION
6	FERRULE	COPPER	GOLD	1						MCX R/A CRIMP PLUG				
5	COVER	BRASS	GOLD	1						RG 174/u, 188/u, 316/u CABLE				
4	INSULATOR	DELTRIN	NATURAL	1						PART NO.				
3	CONTACT PIN	BRASS	GOLD	1						252102				
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO.				
1	BODY	BER. COPPER	GOLD	1					252102.DWG					
	DESCRIPTION	MATERIAL	FINISH	QTY					REV. B					
									SIZE A					
									SCALE NA					