
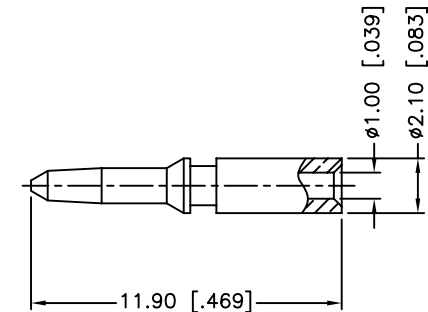


RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	FOR NO.	DESCRIPTION
NC	11/14/00	XXXXXX	INITIAL RELEASE
A	11/08/04	XXXXXX	ADD COUPLING NUT/CHANGE PLATING TO NICKEL
B	09/16/13	2526	CHANGE CENTER CONTACT TO SOLDER, ADD ELECTRICAL/MECHANICAL NOTES, UPDATE FORMAT

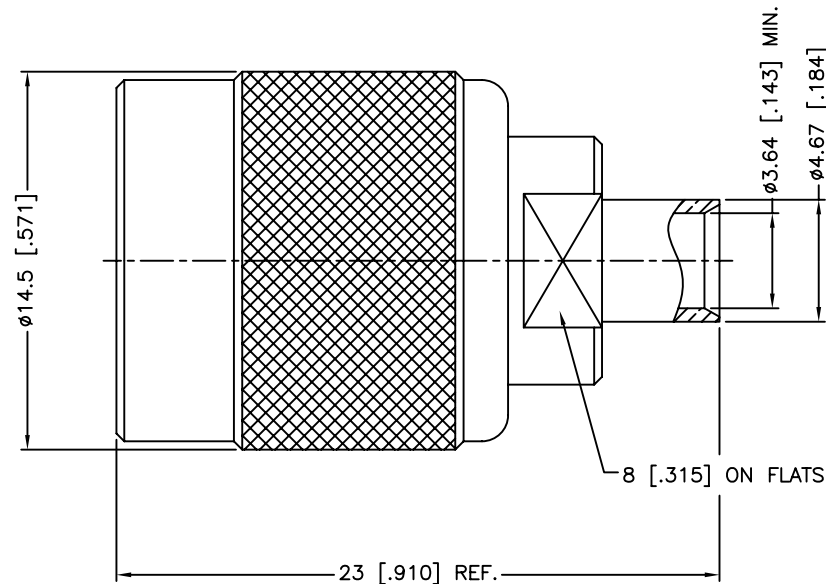

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0–11 GHZ
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: –40°C TO +85°C
7. CONTACT PIN TO SOLDER

8	CONTACT PIN	BRASS	GOLD	1
7	WASHER	BRASS	NICKEL	1
6	RING	DELTRIN	NATURAL	1
5	RETAINER RING	BRASS	NICKEL	1
4	GASKET	RUBBER	RED	1
3	INSULATOR	PTFE	NATURAL	1
2	BODY	BRASS	GOLD	1
1	SHELL	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 6mm ± 0.10mm 6 – 30mm ± 0.20mm 30 – 120mm ± 0.30mm ANGLES ± 1° UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: <.020 ± 0.002" .020 – .236 ± 0.004" .236 – 1.180 ± 0.007" 1.180 – 4.724 ± 0.012" ANGLES ± 1° DO NOT SCALE DRAWING
--

APPROVALS	DATE
DRAWN M.ZHANG	09/16/13
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/122386.DWG

Amphenol Connex			
PART DESCRIPTION			
TNC DIRECT SOLDER PLUG (FOR .141" SEMI-RIGID CABLE)			
PART NO.			
122386			
DWG. NO.	122386.DWG	REV.	B
SIZE	A	SCALE	NA