

NOTES:


- MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY – BRASS, ALBALOY PLATING
CONTACT – BERYLLIUM COPPER, GOLD PLATING
INSULATOR – PTFE, NATURAL
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–6 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: –40°C to +80°C

THIRD ANGLE PROJ.



REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	SEE SHEET 1	10-Oct-04		GOSLEN
C	SEE SHEET 1	07-Sep-06		KATE
D	SEE SHEET 1	10-Oct-06		JEKY
E	SEE SHEET 1	31-Dec-07		KATE
F	SEE SHEET 1	31-Aug-09		SCOTT.H

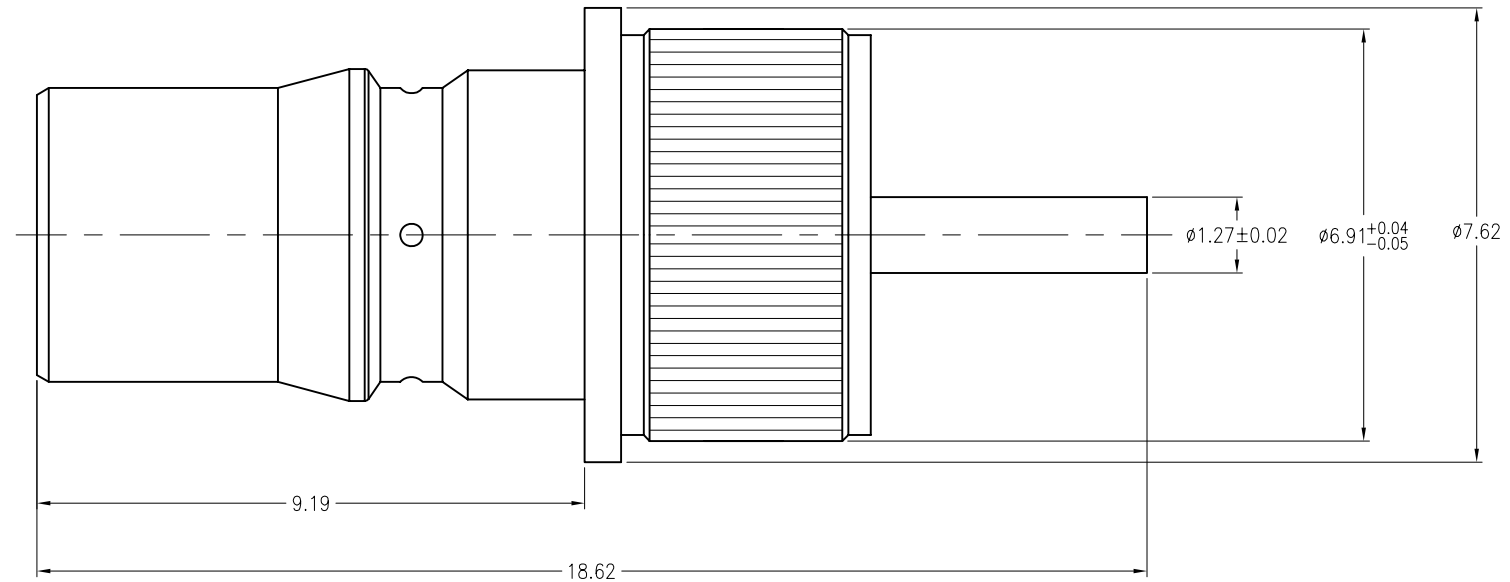

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ±0.3mm ANGLES ±1°	MATERIAL	DRAWN	DATE	TITLE QMA JACK PRESS-FIT RECEPTACLE			Amphenol RF		
		S.XIE	20-Aug-09				Danbury CT USA, Tainan Taiwan, Shenzhen China		
		www.amphenolrf.com							
		REFERENCE	ENGINEER	DATE	DRAWING NO.				
			CISSY	31-Dec-07	930-105J-51S				
			APPROVED	DATE	ITEM NO.				
FINISH	SCOTT.H	20-Aug-09	930-105J-51S						
	CAD FILE		SCALE: 8/1	SHEET 2 OF 2	PART NO.				
	F:\DWG\CNPD\930\105J\51S-FSZ	DWG SIZE	CODE ID	REV	930-105J-51S				
		B	74868	F					