


RECOMMENDED PCB LAYOUT

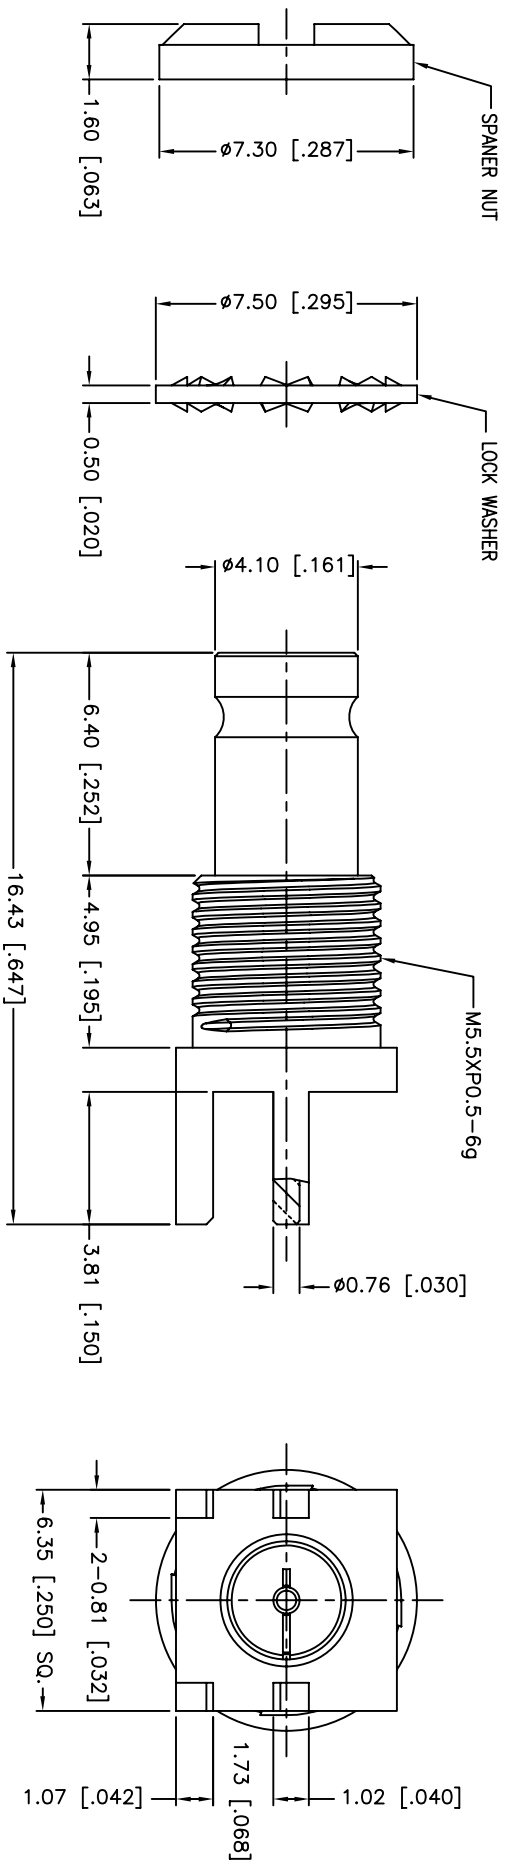

Amphenol Connex

1. FREQUENCY RANGE: 0 – 3 GHz
2. VSWR (RETURN LOSS): 1.15 MAX.