

R39

Same outstanding quality and endurance.
Increased flexibility and value.

The R39 provides high performance in the severe environment demands of military specifications. Its lower profile translates into a smaller space-saving footprint and the new rectangular orientation provides additional installation options. It is also available in a high density, 127 pin contact version providing a wider range of engineering applications. It delivers the same reliable, familiar benefits found in our 38999 connector: effortless installation; blind push pull mating; extreme durability; quick mate and; "scoop-proof" recessed pin design. Using the same wide range of contacts, and the crimp and insert /removal tooling as 38999, it delivers just a little more.

- Rectangular 38999
- Rugged
- Blind Mate
- Available with EMI filtering



A m p h e n o l C u s t o m P r o d u c t s



Amphenol custom products.
Helping to make design
dreams reality.

Amphenol
Aerospace Products

C o n n e c t i n g S o l u t i o n s

Amphenol
Aerospace Products

Amphenol Canada Corp.
20 Melford Drive
Toronto, Ontario, Canada
M1B 2X6

Telephone: (416) 291-4401
Facsimile: (416) 292-0647
Email: sales@amphenolcanada.com
Website: www.amphenolcanada.com

The shape of things to come.

R39

Amphenol's rectangular connector soars to meet higher expectations.

- Rectangular space savings
- Low profile
- High density 127 position inserts or mixed inserts with power, RF or fibre-optic available
- Blind mate
- Rugged
- Uses same contacts as standard 38999

Dynamically engineered
for a changing world.



A m p h e n o l A e r o s p a c e P r o d u c t s







Amphenol[®]

Everything you expect in a
38999 and more...

R39

- Rectangular 38999
- Rugged
- Blind Mate

Available with EMI filtering

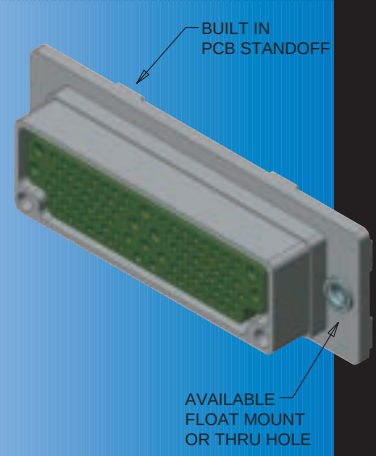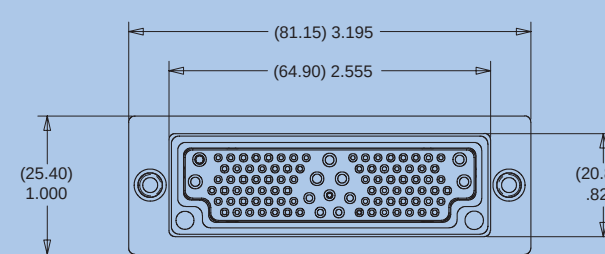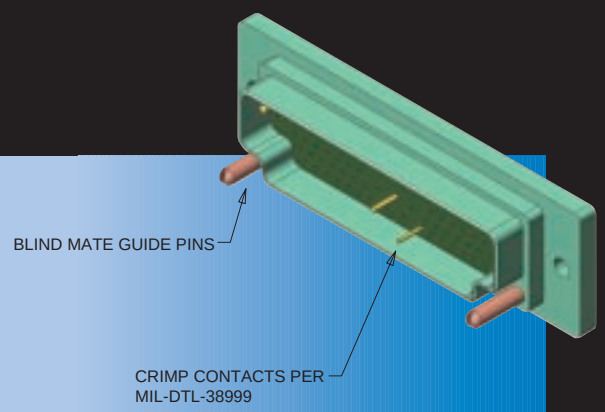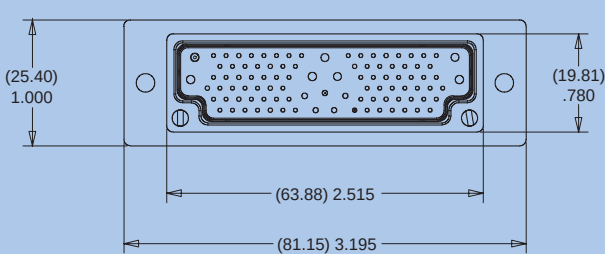

CONTACTS AVAILABLE WITH CRIMP, PCB OR COMPLIANT

R39
Amphenol
Aerospace Products

R39

SPECIFICATIONS


ELECTRICAL CHARACTERISTICS

- DIELECTRIC WITHSTANDING VOLTAGE:
1500 VAC @ SEA LEVEL
500 VDC @ 70,000 FT.
- INSULATION RESISTANCE: 5000 MEGOHMS @ 500 VDC
- CONTACTS:
PER M39029/57 AND M39029/58 FOR SIGNAL AND POWER
PER M39029/102 AND 103 FOR COAX
FIBRE-OPTIC CONTACTS AVAILABLE
- CONTACT TERMINATIONS: CRIMP, PCB, COMPLIANT
- MATERIALS:
SHELL: ALUMINUM ALLOY
INSERT: THERMOPLASTIC PER MIL-P-46185
HARDWARE: CRES
CONTACT RETENTION: BeCu
AVAILABLE SHELL FINISHES:
ELECTROLESS NICKEL,
OD CHROMATE OVER CADMIUM
ZINC NICKEL
TIN
GOLD


ENVIRONMENTAL CHARACTERISTICS:

- THERMAL SHOCK: MIL-STD-202, METHOD 107, COND. A
PHYSICAL SHOCK: MIL-STD-202, METHOD 213, COND. A
VIBRATION: MIL-STD-202, METHOD 204, COND. B
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106 (OMIT 7a AND 7b)
DURABILITY: 500 CYCLES MATING/UN-MATING


INSERT ARRANGEMENTS




INSERT 127 - ALL SIZE 22




INSERT 56 - ALL SIZE 20



INSERT 31 - ALL SIZE 16



INSERT 17 - ALL SIZE 12



INSERT 98 - 86 SIZE 22
5 SIZE 20, 7 SIZE 16

R39 P 098 P T A 1 000

- R39 Rectangular 38999 Connector Series
- Shell Style R - receptacle, P - plug
- Insert Pattern 127, 098, 056, 031, 017 (represents the total # of contacts in the insert)
- Deviation 000 - STD Consult Factory for special features
- Shell Finish 1 - Electroless Nickel 2 - OD Chromate 3 - Tin 4 - Gold
- Mounting Type A - Standard mount B - Float
- Contact Termination T - Crimp B - PCB C - Compliant
- Contact Gender P - Pin S - Socket

Filtered R39 configurations available. Consult factory.









Everything you expect in a
38999 and more...

R39

- Rectangular 38999
- Rugged
- Blind Mate

Available with EMI filtering

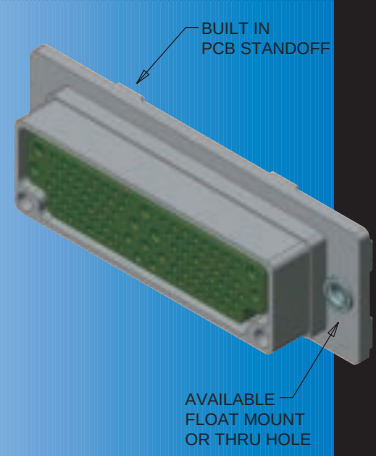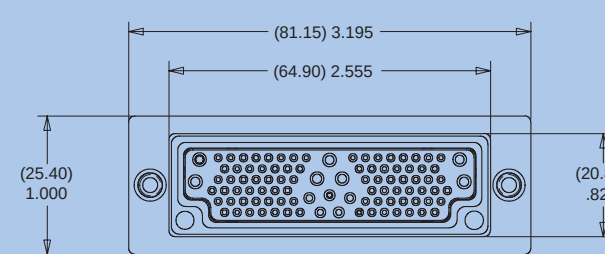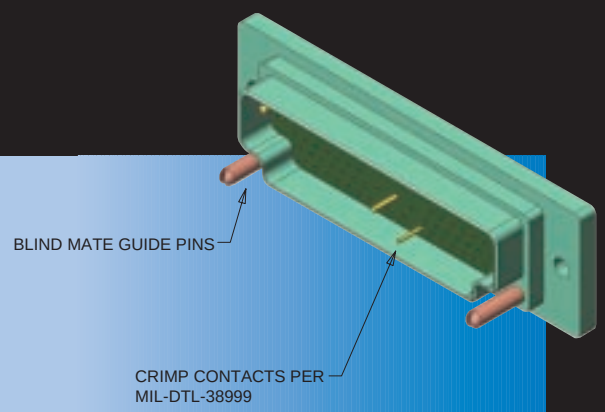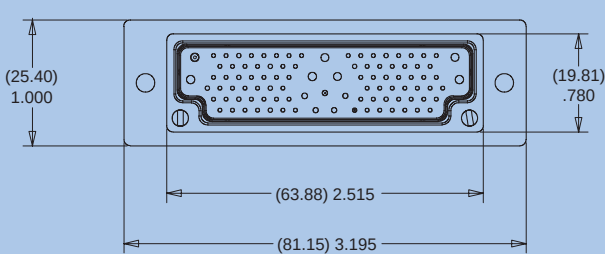

CONTACTS AVAILABLE WITH CRIMP, PCB OR COMPLIANT

R39 Amphenol

Aerospace Products

R39

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

- DIELECTRIC WITHSTANDING VOLTAGE:
1500 VAC @ SEA LEVEL
500 VDC @ 70,000 FT.
- INSULATION RESISTANCE: 5000 MEGOHMS @ 500 VDC
- CONTACTS:
PER M39029/57 AND M39029/58 FOR SIGNAL AND POWER
PER M39029/102 AND 103 FOR COAX
FIBRE-OPTIC CONTACTS AVAILABLE


CONTACT TERMINATIONS: CRIMP, PCB, COMPLIANT

- MATERIALS:
SHELL: ALUMINUM ALLOY
INSERT: THERMOPLASTIC PER MIL-P-46185
HARDWARE: CRES
CONTACT RETENTION: BeCu
- AVAILABLE SHELL FINISHES:
ELECTROLESS NICKEL,
OD CHROMATE OVER CADMIUM
ZINC NICKEL
TIN
GOLD


ENVIRONMENTAL CHARACTERISTICS:

- THERMAL SHOCK: MIL-STD-202, METHOD 107, COND. A
PHYSICAL SHOCK: MIL-STD-202, METHOD 213, COND. A
VIBRATION: MIL-STD-202, METHOD 204, COND. B
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106 (OMIT 7a AND 7b)
DURABILITY: 500 CYCLES MATING/UN-MATING


INSERT ARRANGEMENTS




INSERT 127 - ALL SIZE 22




INSERT 56 - ALL SIZE 20



INSERT 31 - ALL SIZE 16

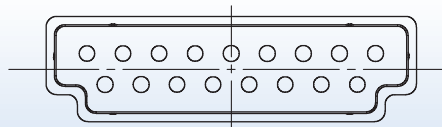

INSERT 17 - ALL SIZE 12



INSERT 98 - 86 SIZE 22
5 SIZE 20, 7 SIZE 16

R39 P 098 P T A 1 000

- R39** Rectangular 38999 Connector Series
- Shell Style** R - receptacle, P - plug
- Insert Pattern** 127, 098, 056, 031, 017 (represents the total # of contacts in the insert)
- Deviation** 000 - STD Consult Factory for special features
- Shell Finish** 1 - Electroless Nickel 2 - OD Chromate 3 - Tin 4 - Gold
- Mounting Type** A - Standard mount B - Float
- Contact Termination** T - Crimp B - PCB C - Compliant
- Contact Gender** P - Pin S - Socket

Filtered R39 configurations available. Consult factory.



R39

Same outstanding quality and endurance.
Increased flexibility and value.

The R39 provides high performance in the severe environment demands of military specifications. Its lower profile translates into a smaller space-saving footprint and the new rectangular orientation provides additional installation options. It is also available in a high density, 127 pin contact version providing a wider range of engineering applications. It delivers the same reliable, familiar benefits found in our 38999 connector: effortless installation; blind push pull mating; extreme durability; quick mate and; "scoop-proof" recessed pin design. Using the same wide range of contacts, and the crimp and insert /removal tooling as 38999, it delivers just a little more.

- Rectangular 38999
- Rugged
- Blind Mate
- Available with EMI filtering



A m p h e n o l C u s t o m P r o d u c t s



Amphenol custom products.
Helping to make design
dreams reality.

Amphenol
Aerospace Products

C o n n e c t i n g S o l u t i o n s

Amphenol
Aerospace Products

Amphenol Canada Corp.
20 Melford Drive
Toronto, Ontario, Canada
M1B 2X6

Telephone: (416) 291-4401
Facsimile: (416) 292-0647
Email: sales@amphenolcanada.com
Website: www.amphenolcanada.com

The shape of things to come.

R39

Amphenol's rectangular connector soars to meet higher expectations.

- Rectangular space savings
- Low profile
- High density 127 position inserts or mixed inserts with power, RF or fibre-optic available
- Blind mate
- Rugged
- Uses same contacts as standard 38999

Dynamically engineered
for a changing world.



A m p h e n o l A e r o s p a c e P r o d u c t s

Amphenol[®]