

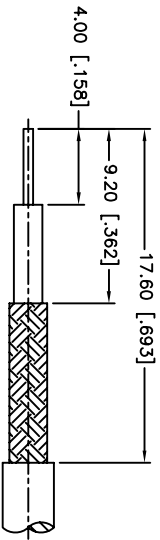




REV.	DATE	ECR NO.	DESCRIPTION
NC	09/16/09	XXXXXX	INITIAL RELEASE

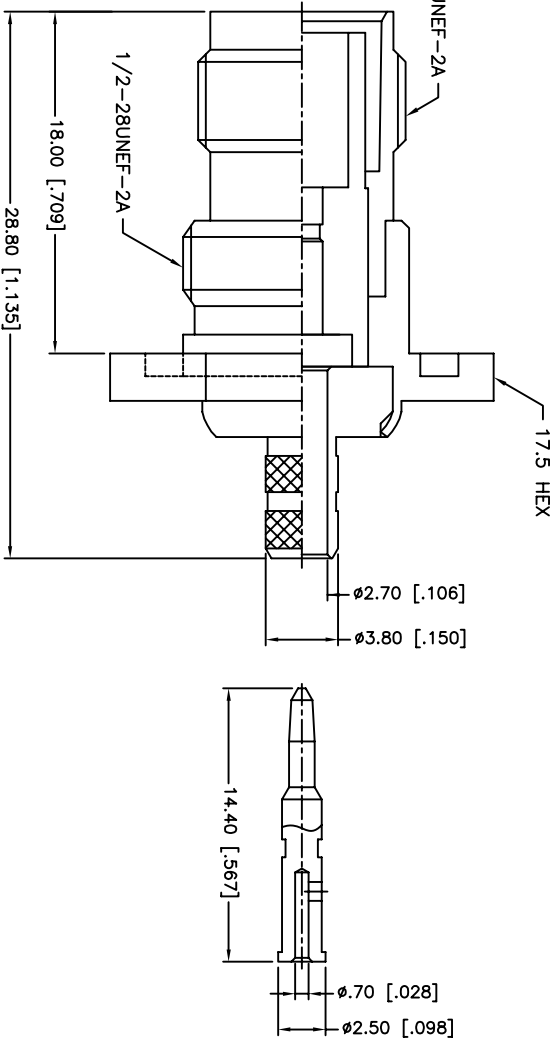

RECOMMENDED
CABLE STRIPPING DIM'S

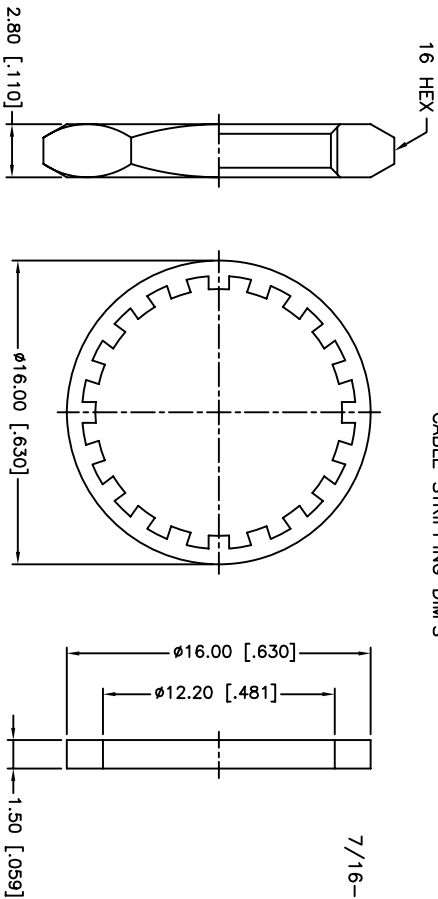

NOTE: 1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

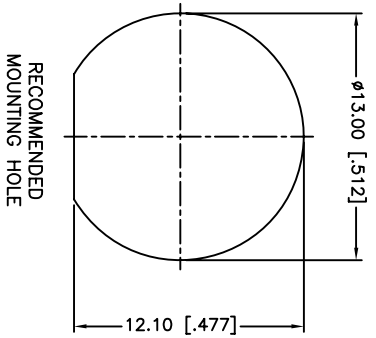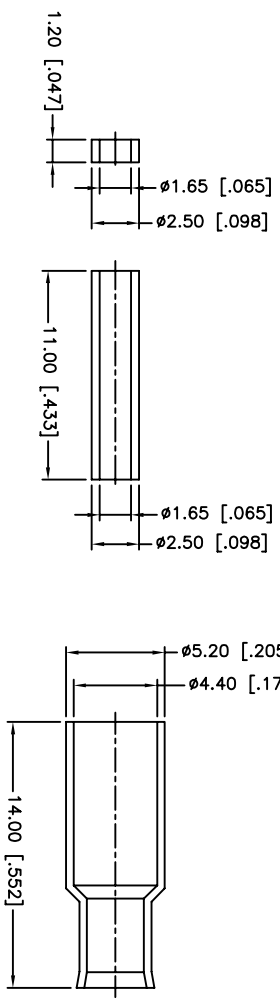

11	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	
10	SPACE	BRASS	NICKEL	1		
9	SLEEVE	PTFE	NATURAL	1		
8	CONTACT PIN	BRASS	GOLD	1		
7	HEX NUT	BRASS	NICKEL	1		
6	LOCK WASHER	BRASS	NICKEL	1		
5	GASKET	RUBBER	RED	1		
4	BARREL	BRASS	NICKEL	1		
3	INSULATOR	PTFE	NATURAL	1		
2	HOUSING	BRASS	NICKEL	1		
1	BODY	BRASS	NICKEL	1		
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	
					CAD FILE C:/CONNEX/122192RP.DWG	
				APPROVALS	DATE	
				DRAWN CW	09/16/09	
				CHECKED		
				ISSUED		
				SHEET 1 OF 1		
PART DESCRIPTION TNC REVERSE POLARITY BULKHEAD CRIMP JACK PART NO. 122192RP						
DWG. NO.		122192RP.DWG		REV. NC	SIZE A	SCALE NA

Amphenol Connex

TNC REVERSE POLARITY BULKHEAD
CRIMP JACK