
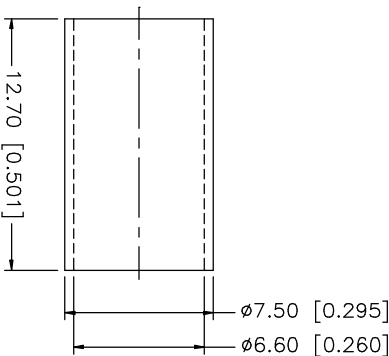
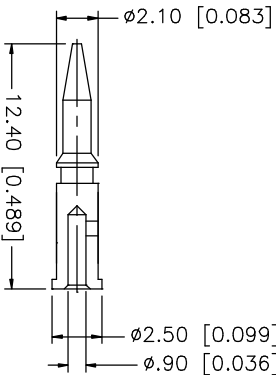
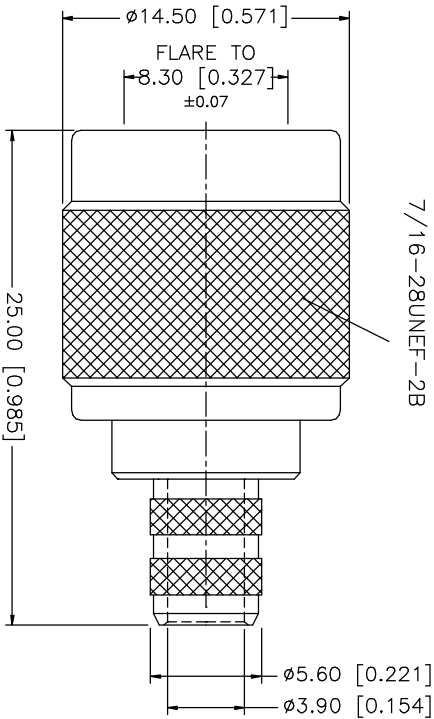


REV.	DATE	DESCRIPTION
A	06/05/03	UPDATE DRAWING FORMAT

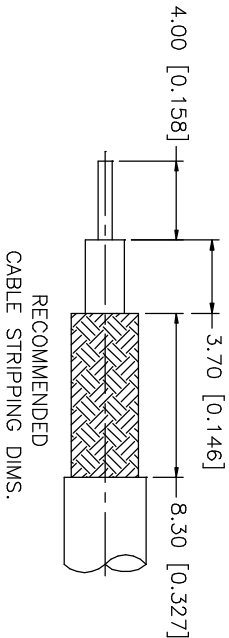

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	06/05/03
6					0.5 - 8mm ± 0.20mm	CHECKED		
5					8 - 30mm ± 0.40mm	ISSUED		
4	FERRULE	COPPER	NICKEL	1	30 - 120mm ± 0.50mm	SHEET	1 OF 1	
3	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	Amphenol Connex TNC CRIMP PLUG (FOR RG 59/U 20AWG CABLE- 75ohm)		
2	INSULATOR	DELFIN	NATURAL	1	.020 - .315 = ± 0.007"			
1	BODY	BRASS	NICKEL	1	.315 - 1.180 = ± 0.015"			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/122/122426.DWG	DWG. NO.
								122426.DWG
								REV. A
								SIZE A
								SCALE NA