


1. MATERIALS AND FINISHES:
SMA STR BHD JACK - BRASS, GOLD PLATING

AMC RA PLUG:
HOUSING - PBT, BLACK
CONTACT & GROUND CONTACT - PHOSPHOR BRONZE, GOLD PLATING

CABLE - 1.13 MM CABLE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 95-902-545-XXX AND DATE CODE"

SCALE 1.000

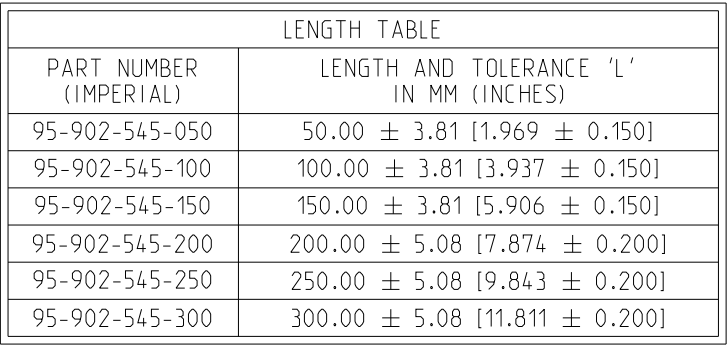

☒ FREQUENCY: DC - 6 GHz	☒ CONTINUITY
☐ VSWR: ____ MAX.	☒ HI-POT: 200 VRMS
☐ INS. LOSS: ____ dB MAX.	☐ OTHER:

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE:

<0.5mm = ± 0.05 mm	[<0.020 = ± 0.002]
>0.5 - 6mm = ± 0.1 mm	[>0.020 - 0.236 = ± 0.004]
>6.00 - 30mm = ± 0.2 mm	[>0.236 - 1.181 = ± 0.008]
>30.00 - 120mm = ± 0.3 mm	[>1.181 - 4.725 = ± 0.012]

ENGR.1
D. GEORGE

SHEET NO. 2 OF 2

Amphenol RF

REV

THIRD ANGLE PROJ.