




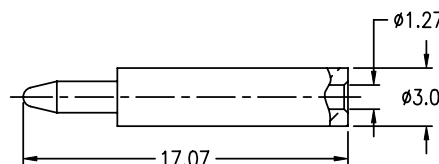
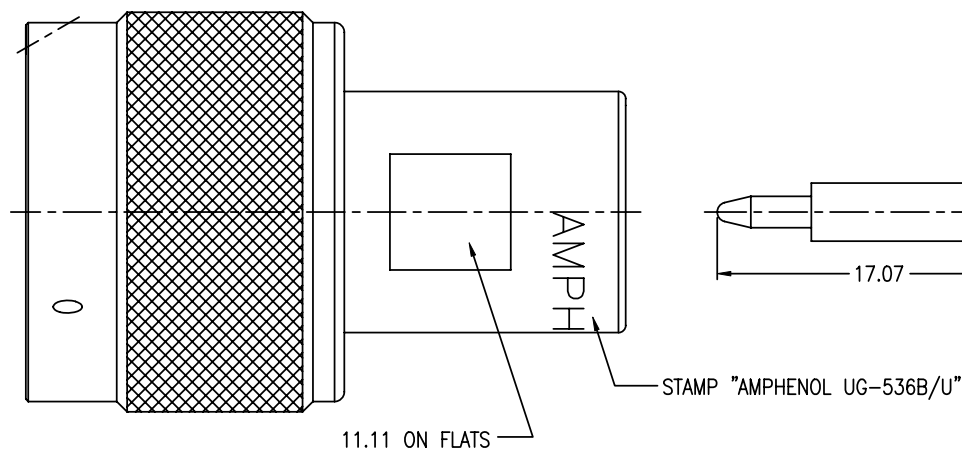


NOTES:

- MATERIALS AND FINISHES
BODY – BRASS, NICKEL PLATING
CONTACT – BRASS, SILVER PLATING
INSULATOR – PTFE
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–11 GHz
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: – 40°C to +155°C
- CABLES USED FOR RG–55/U, 55A/U, 58/U, 58A/U, 58C/U, 141/U, 142/U, 143/U

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	SEE SHEET 1	02-Dec-04	--	S.HSIEH
AE	REDRAWN TO UPDATE FORMAT	16-Jan-09	47239	SH
AF	STAMP "AMPHENOL" WAS "74868"\RD-DM11120601R3	26-Dec-11	48842	SH

RECOMMENDED
CABLE STRIPPING DIM'S

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ± 0.3mm ANGLES ±1°

NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

FINISH

DRAWN
R.MAOENGINEER
S.HSIEHAPPROVED
S.HSIEH

CAD FILE

F:\DWG\CNPD\34025-AFSZ

DATE
12-Dec-11DATE
02-Dec-04DATE
12-Dec-11

TITLE

IMPROVED 'N' PLUG
UG-536B/U

SCALE: 2.5/1

DWG SIZE
BSHEET
2 OF 2CODE ID
74868REV
AF

Amphenol RF

Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO. 34025

ITEM NO. 34025

PART NO. 34025