
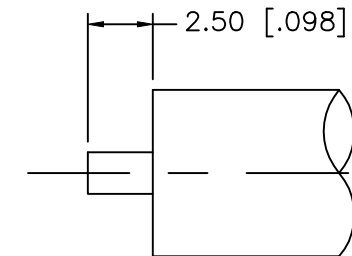
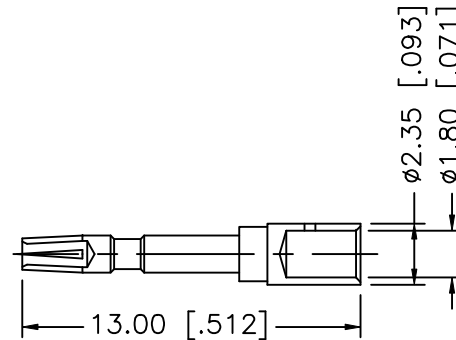


REV.	DATE	DESCRIPTION
NC	06/11/02	INITIAL RELEASE

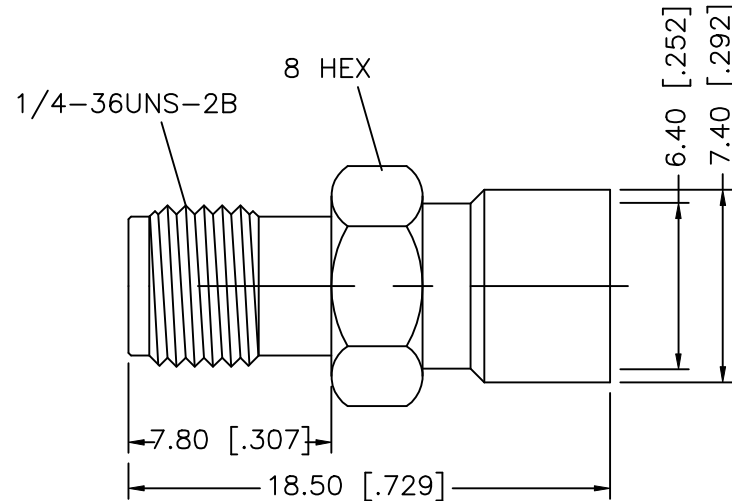

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:
1) SOLDER CENTER CONTACT

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol - Connex CONNECTOR CORPORATION					
8					DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN					G.R.S.	06/11/02
7						CHECKED						
6						ISSUED						
5												
4				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"			TITLE SMA DIRECT SOLDER JACK (.250" SEMI RIGID CABLE)					
3	CONTACT PIN	BRASS	GOLD									
2	INSULATOR	TEFLON	NATURAL				SIZE	FSCM NO.	DWG. NO.	REV.		
1	BODY	BRASS	GOLD				A	99001	132345.DWG	NC		
	DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING		SCALE	NA	PART NO.	132345	SHEET	1 OF 1	