



NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 31-2367, AND DATE CODE"
C.FERRULE & CONTACT ARE SHIPPED LOOSE
5. SHOWS CABLE ENTRY DIMENSIONS.
6. CUSTOMER NOTE: SOLDER CONTACT TO CABLE.
WHEN CRIMPING CONTACT TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01)
AND DIE SET 227-1221-11, CAVITY 'B' (M22520/5-11 CLOSURE 'B')
7. CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE
SET 227-1221-11, CAVITY 'A' (M22520/5-11, CLOSURE 'A').

THIRD ANGLE PROJ.


REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
	RELEASE TO MFG.			
V	ADDED COD; STAMP "AMPHENOL" WAS "74868"\RD-DM12092001R3	19-Oct-12	49079	S.H
W	REMOVE 'M23329/4-01-03', 'MIL-CRIMP 23329 IN TITLE' \RD-DM14090501J9	17-Sep-14	50170	S.H

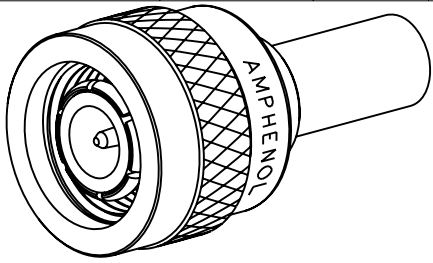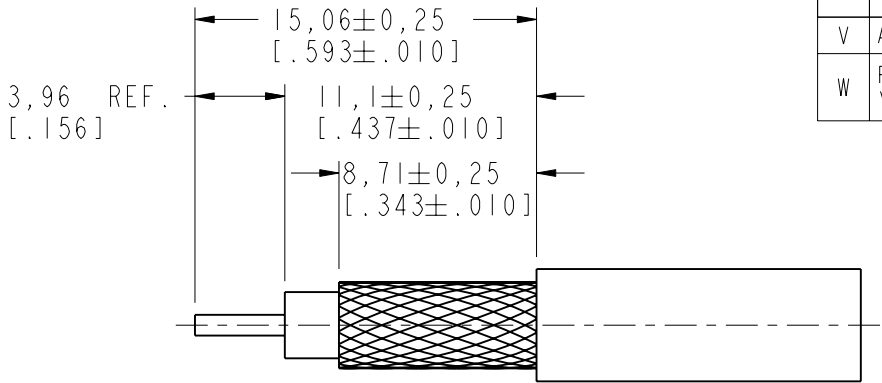

SCALE 2.000

RECOMMENDED CABLE
STRIPPING DIMENSIONS

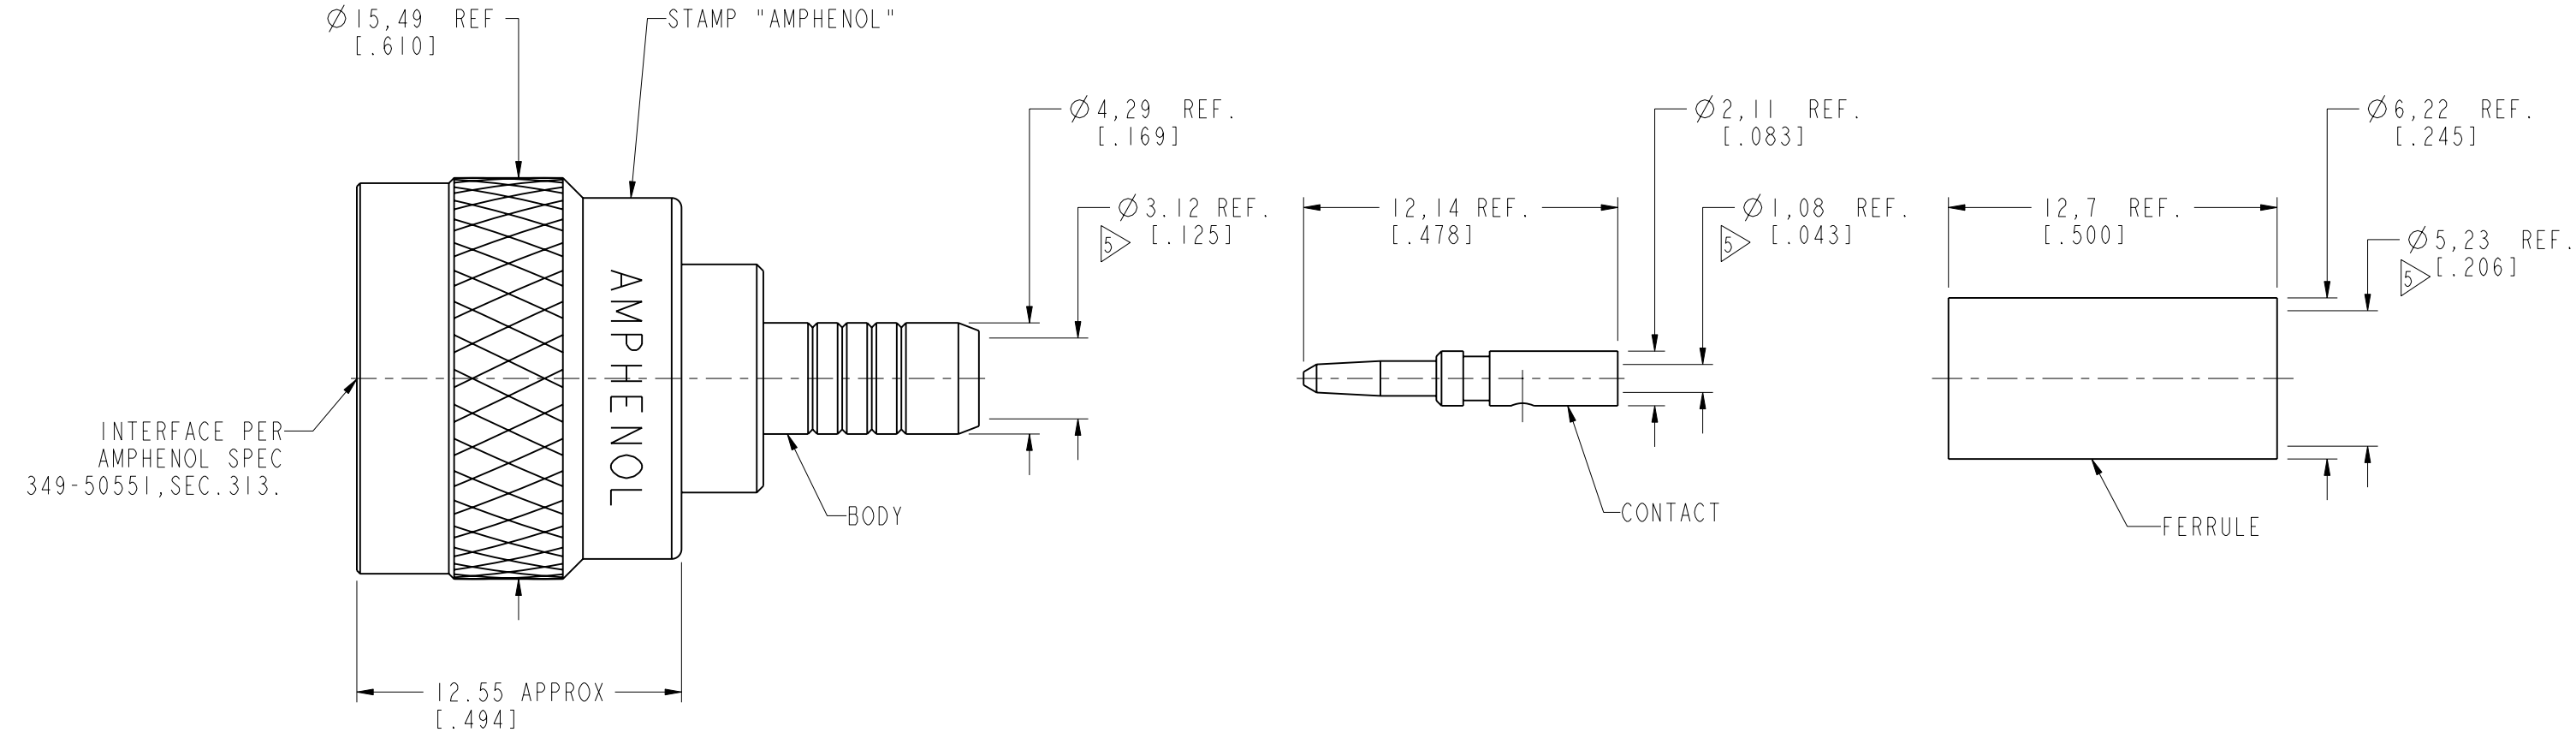

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ±1°	MATERIAL -	DRAWN JONA	DATE 09-Sep-14	TITLE TNC PLUG FOR RG58 & 141/U CABLE		Amphenol RF	
		ENGINEER S.LI	DATE 13-Aug-12			www.amphenolrf.com	
		APPROVED S.HSIEH	DATE 09-Sep-14			DRAWING NO.31-2367	
		REFERENCE EAR # 961603 AND CONFIGURATION LEVEL: □□□	CAD FILE	SCALE: 4.0:1.0	SHEET 2 OF 2	ITEM NO. 31-2367	PART NO. 31-2367
		FINISH		DWG SIZE B	REV W		