



REV.	DATE	DESCRIPTION
NC	09/25/05	INITIAL RELEASE

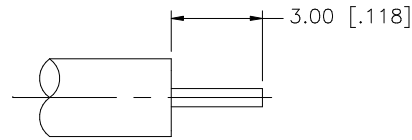

RECOMMENDED
CABLE STRIPPING DIM'S

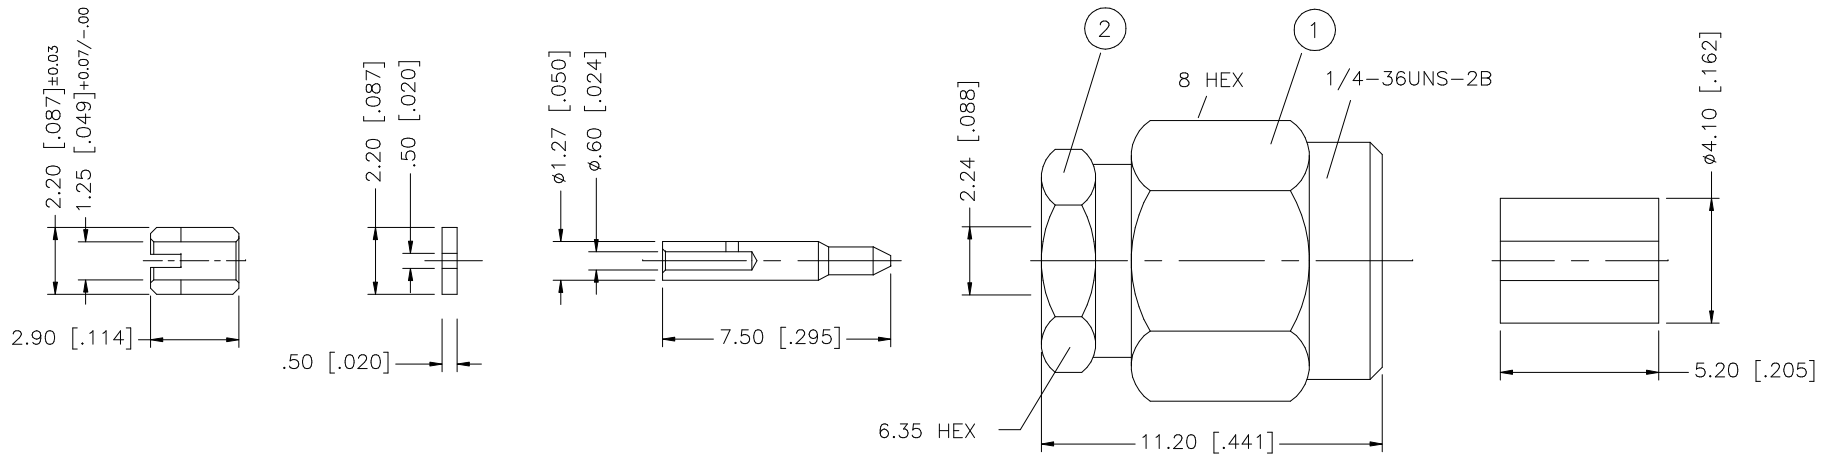

1. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex PART DESCRIPTION SMA DIRECT SOLDER PLUG (FOR .047” CABLE) PART NO. 132370 DWG. NO. 132370.DWG REV. NC SIZE A SCALE NA					
8						DRAWN	G.R.S.	09/25/05							
7						CHECKED									
6	SOLDER BARREL	BRASS	GOLD	1			ISSUED								
5	INSULATOR	TEFLON	NATURAL	1			SHEET	1 OF 1							
4	CONTACT PIN	BRASS	GOLD	1											
3	INSULATOR	TEFLON	NATURAL	1											
2	BODY	BRASS	GOLD	1											
1	SHELL	STAINLESS STEEL	PASSIVATED S.S.	1		CAD FILE		C:/132/132370.DWG							
	DESCRIPTION	MATERIAL	FINISH	QTY											