
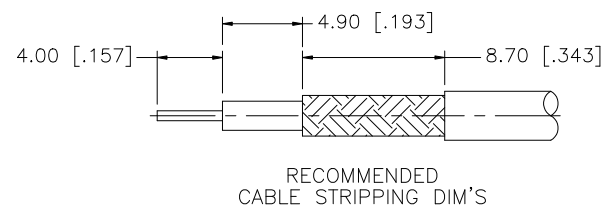
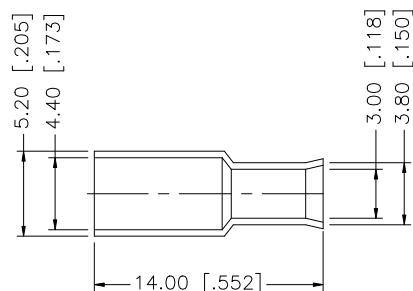




REV.	DATE	DESCRIPTION
NC	07/15/02	INITIAL RELEASE
A	05/01/04	UPDATE DRAWING FORMAT
B	12/10/07	ADD CABLE DESCRIPTION

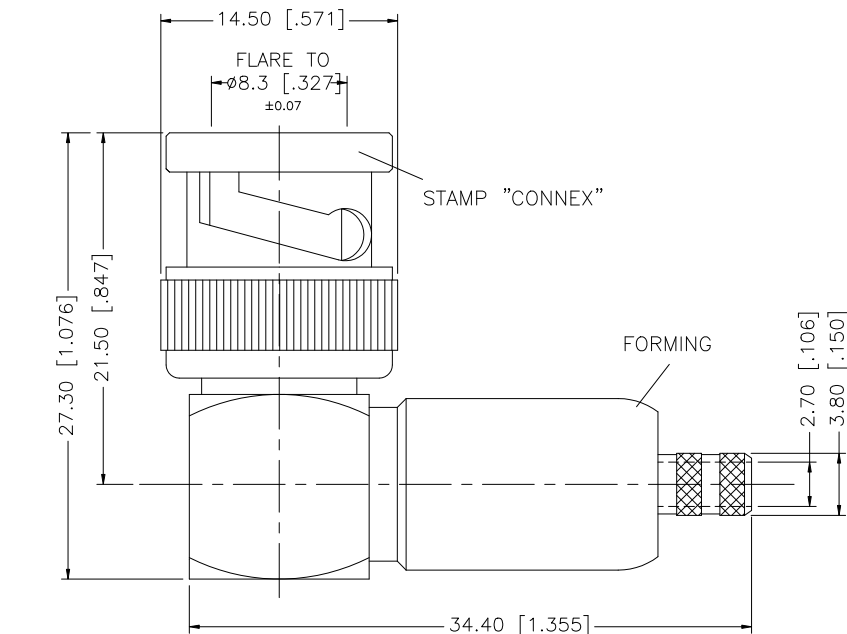

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
8						DRAWN	G.R.S.	12/10/07											
7	FERRULE	BRASS	NICKEL	1		CHECKED													
6	SLEEVE	DELTRIN	NATURAL	1		ISSUED				PART DESCRIPTION									
5	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1				BNC R/A CRIMP PLUG (FOR RG-174/316-U CABLE)								
4	CONTACT PIN	BRASS	GOLD	1							PART NO.								
3	CONTACT PIN	PHOS. BRONZE	GOLD	1							112198								
2	INSULATOR	DELTRIN	NATURAL	1		CAD FILE C:/112/112198.DWG					DWG. NO.		112198.DWG		REV.	B	SIZE	A	SCALE
1	BODY	BRASS	NICKEL	1															
DESCRIPTION																			
MATERIAL																			
FINISH																			
QTY																			