Downloaded from Arrow.com.

REV.	DATE	ECR NO.	DESCRIPTION
NC	04/22/07	–	INITIAL RELEASE
A	10/15/08	–	REVISE 174/U TO 179/U CABLE CALL OUT.

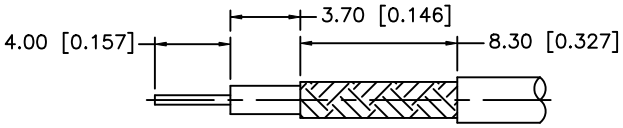

RECOMMENDED
CABLE STRIPPING DIM'S

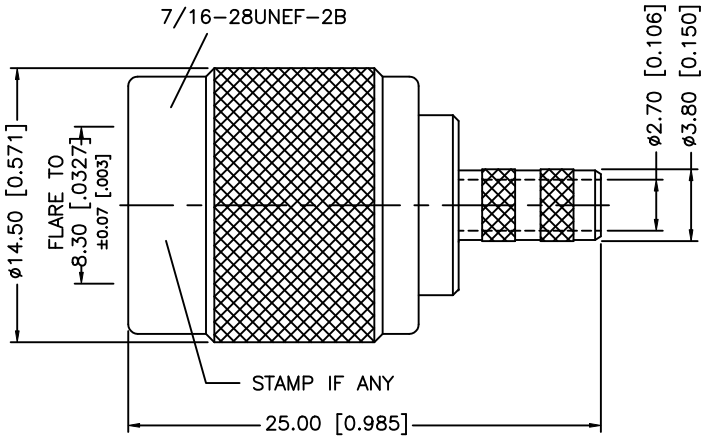

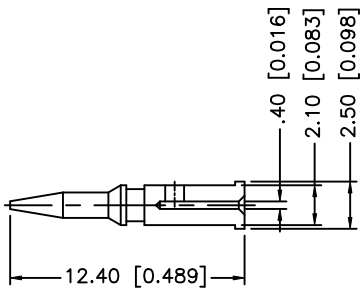



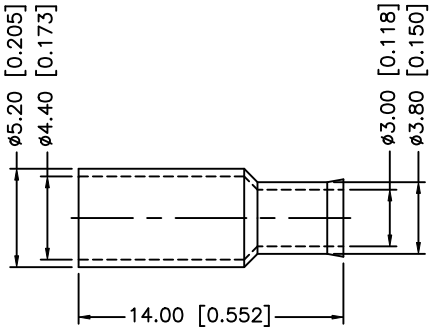

NOTES:

1. CRIMPED FERRULE HEX CRIPM SIZE .178" [4.52]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5	FERRULE	COPPER	NICKEL	1
4	SLEEVE	DELRIN	NATURAL	1
3	INSULATOR	DELRIN	NATURAL	1
2	CONTACT PIN	BRASS	GOLD	1
1	SHELL/BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	10/15/08
CHECKED		
ISSUED		
SHEET	1 OF 1	

CAD FILE C:/122/122117.DWG

Amphenol Connex

PART DESCRIPTION
TNC CRIMP PLUG
(FOR RG–179/U, 187/U, B9221 CABLE)

PART NO. 122117

DWG. NO. 122117.DWG | REV. A | SIZE A | SCALE NA