| REV. STATUS SHEETS | REV.LTR. | - | | | | REVISIONS | | | |
|---|---|---|---|---|---|---|---|---|---|
| | SHEET NO | 1 | | | | LTR | DESCRIPTION | DATE | BY |
| | | | | | | | Released | 9/01/94 | JCL |

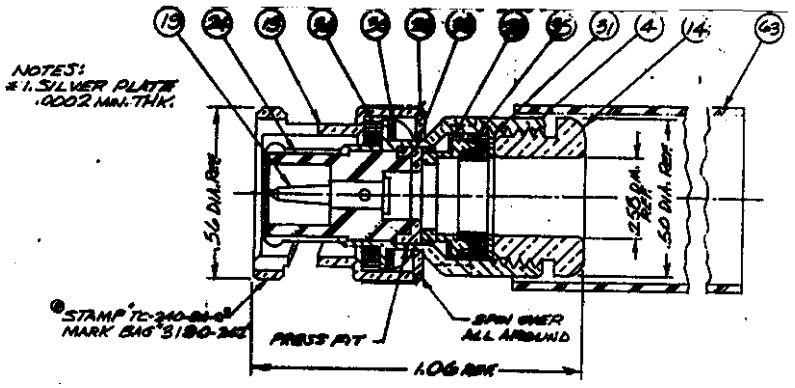


**Materials & Finishes**

Center Contact: Gold Plated Brass
Outer Contact: Silver Plated Beryllium Copper
Other Metal Parts: Silver Plated Brass
Dielectric: Teflon
Gasket: Silicone Rubber

**Electrical Properties**

Impedance: 50 Ohms
Working Voltage: 500 Volts (RMS max)
VSWR: 1.25:1 (max) up to 1 GHz
Insertion Loss: <0.10 dB up to 1 GHz

| Unless otherwise specified dimensions in inches. Tolerances are applicable when specified. | Approvals | | | TIMES MICROWAVE SYSTEMS Wallingford, CT 06492 | | |
|---|---|---|---|---|---|---|
| | Drawn | JCL | 9/01/94 | TC-240-BMC Type BNC male Clamp Connector for LMR-240 | | |
| | Check | | | | | |
| | PrjMg | | | Size A | Code Ident 68999 | Dwg.No. 3190-242 |
| | PrdMg | | | | | |
| | QAMgr | RTH | 9/01/94 | Scale: NA | | Sheet: 1 of 1 |

Downloaded from Arrow.com.