



REV.	DATE	DESCRIPTION
A	03-Mar-10	RELEASE TO MFG.

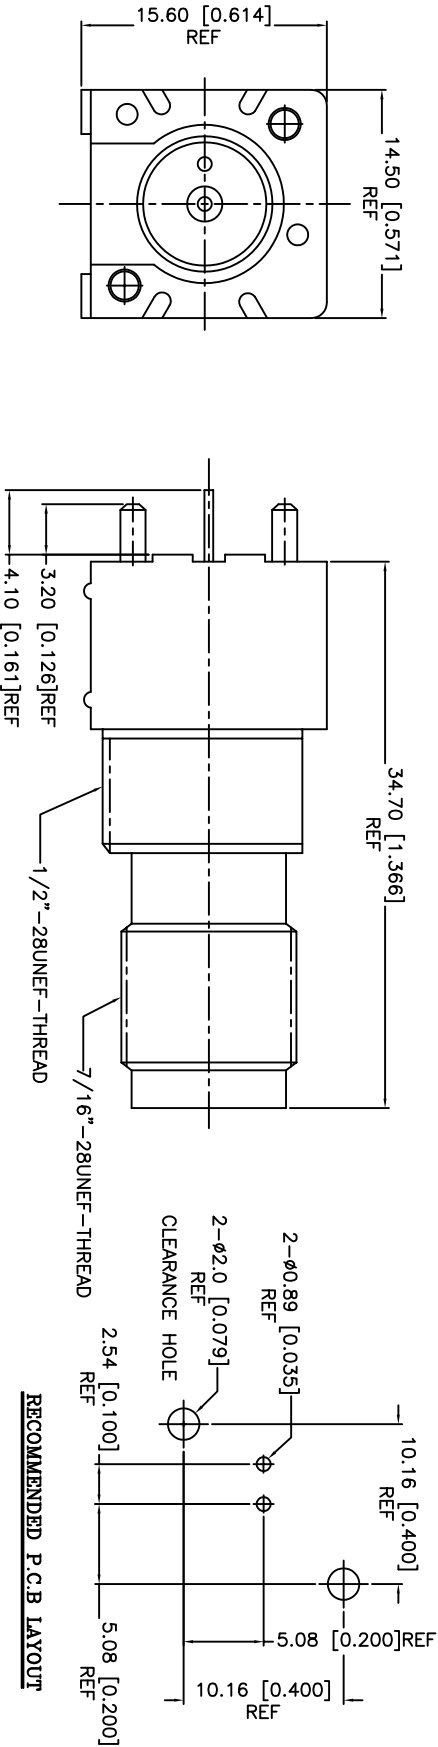

SPECIFICATIONS:
 MECHANICAL CHARACTERISTICS:
 MATING/UNMATING – 500 CYCLES

ELECTRICAL CHARACTERISTICS:
 NORMAL IMPEDANCE – 50 OHMS
 FREQUENCY RANGE – 0-1 GHZ
 OPERATING VOLTAGE – 500 VOLTS RMS
 INSULATION RESISTANCE – 5000 MEGOHMS MIN.

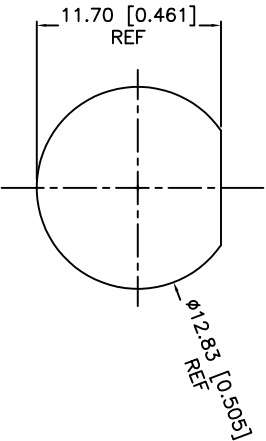

PANEL CUTOUT

RoHS COMPLIANCE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	AMPHENOL CONNEX TNC VERTICAL PCB MOUNT RECEPTACLE IMPEDANCE 50 OHM		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	CLEMENT			
0.5 – 8mm ± 0.20mm	CHECKED				
8 – 30mm ± 0.40mm	ISSUED				
30 – 120mm ± 0.50mm	SHEET	1 OF 1	PART NO.	122956	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	C:\122\122956.DWG		DWG. NO.	122956.DWG	REV. A
.020 – .315 = ± 0.007"					SIZE A
.315 – 1.180 = ± 0.015"					SCALE N/A
1.180 – 4.724 = ± 0.020"					
DO NOT SCALE DRAWING					
QTY					
FINISH					
MATERIAL					
DESCRIPTION					