

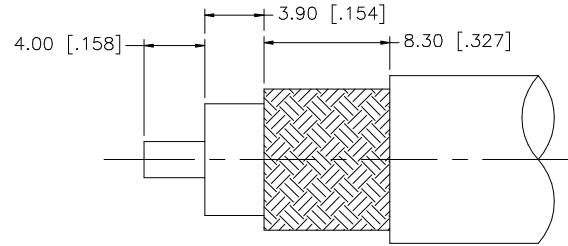
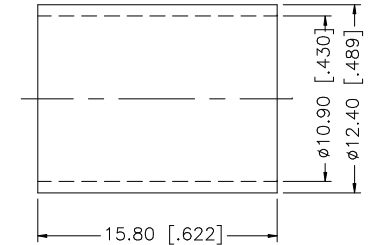


REV.	DATE	DESCRIPTION
A	04/05/03	UPDATE DRAWING FORMAT

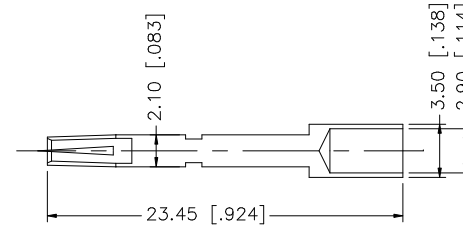

RECOMMENDED CABLE
STRIPPING DIMENSIONS

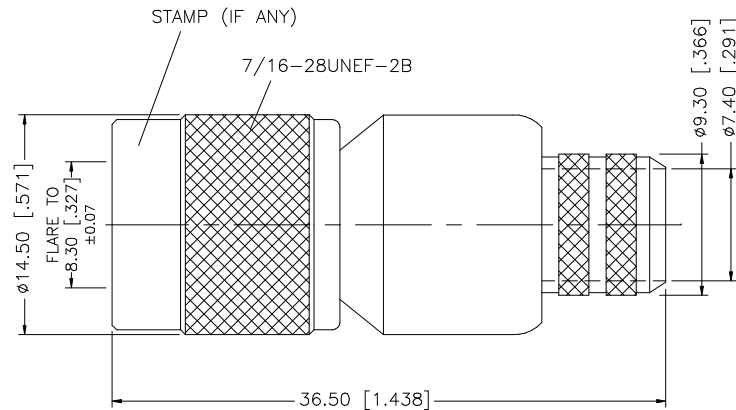

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CONTACT PIN TO SOLDER
OR .118" HEX CRIMP

9					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex PART DESCRIPTION TNC REVERSE POLARITY CRIMP PLUG (FOR BELDEN 8214, 9913 LMR 400 CABLE) PART NO. 122393RP							
8						DRAWN	G.R.S.								04/05/03
7						CHECKED									
6						ISSUED			DWG. NO. 122393RP.DWG REV. A SIZE A SCALE NA						
5	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1								
4	GASKET	RUBBER	RED	1											
3	CONTACT PIN	PHOS. BRONZE	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1											
1	SHELL/BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/122/122393RP.DWG							