


REV.	DATE	DESCRIPTION
NC	03/20/03	INITIAL RELEASE

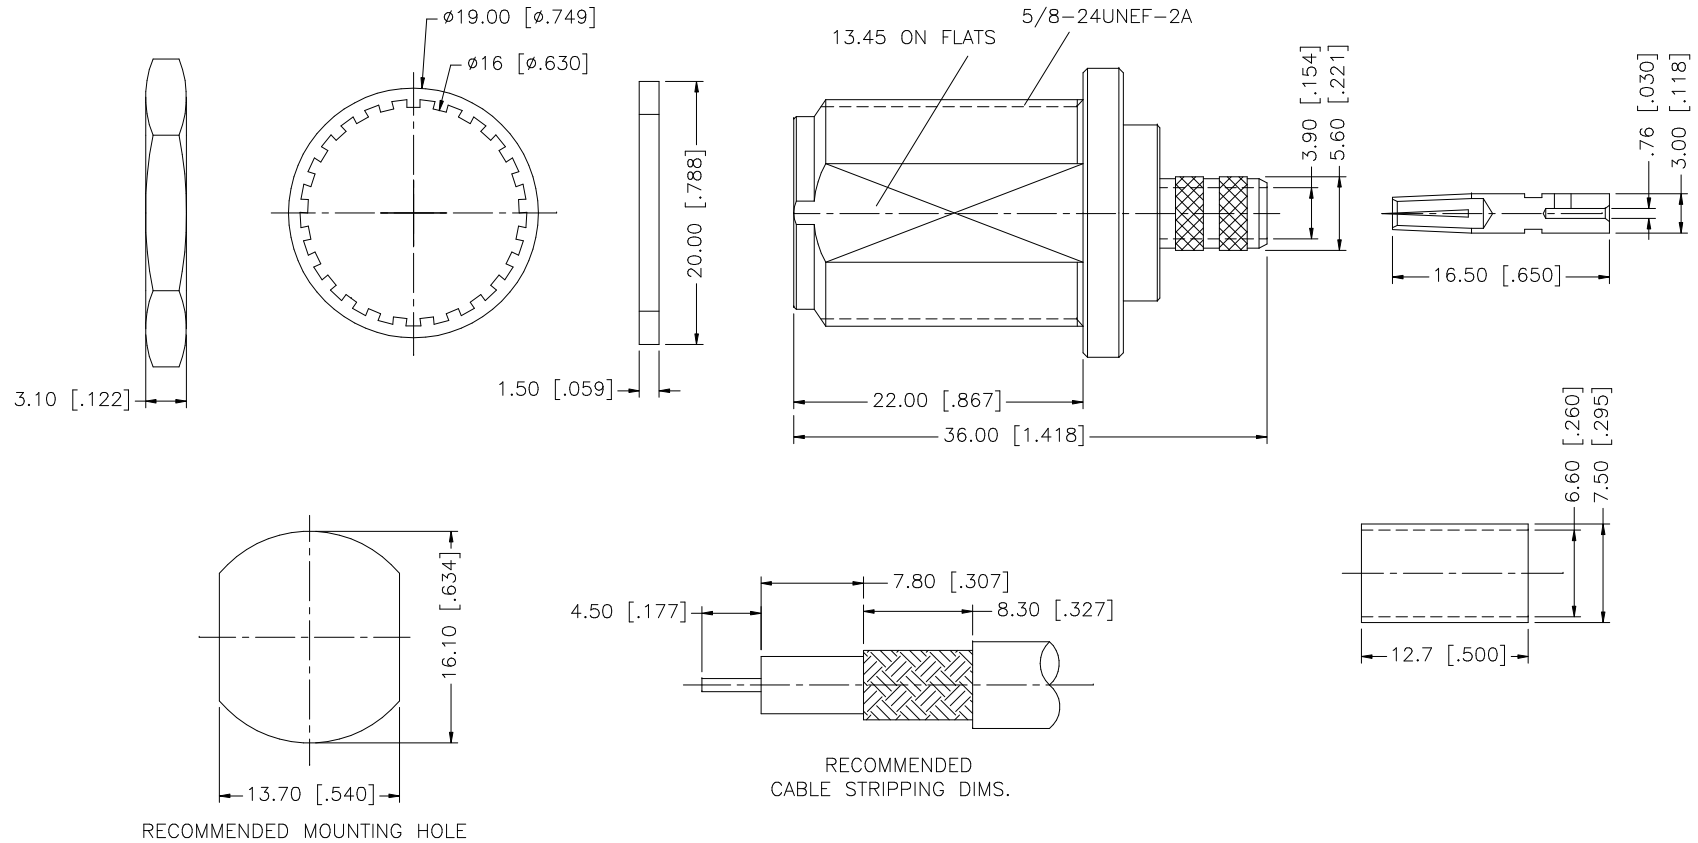

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
 2. CONTACT PIN TO SOLDER

QTY	FINISH	MATERIAL	DESCRIPTION
1	NEXCOTE	BRASS	BODY
1	NATURAL	TEFLON	INSULATOR
1	NEXCOTE	BRASS	BARREL
1	RED	SILICONE	GASKET
1	NEXCOTE	BRASS	LOCK WASHER
1	NEXCOTE	BRASS	HEX NUT
1	GOLD	PHOS. BRONZE	CONTACT PIN
1	NEXCOTE	COPPER	FERRULE
DO NOT SCALE DRAWING			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN G.R.S.	03/20/03			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CHECKED				
	ISSUED				
	SHEET 1 OF 1		PART DESCRIPTION		
			N BULKHEAD CRIMP JACK (FOR 59/U CABLE)		
			PART NO.		
			172107		
	CAD FILE	C:/172/172107.DWG	DWG. NO.	172107.DWG	REV. NC
			SIZE	A	SCALE NA