

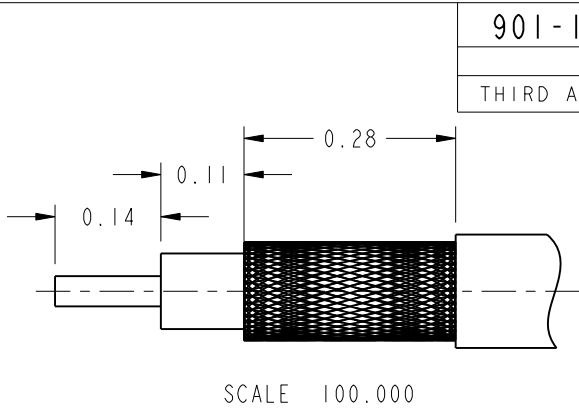


- NOTES:
- MATERIALS AND FINISHES:
BODY & C NUT - BERYLLIUM COPPER, GOLD PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE
 - ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
 - MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
 - PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 901-101-15, AND DATE CODE"
 - SHOWS CABLE ENTRY DIMENSION

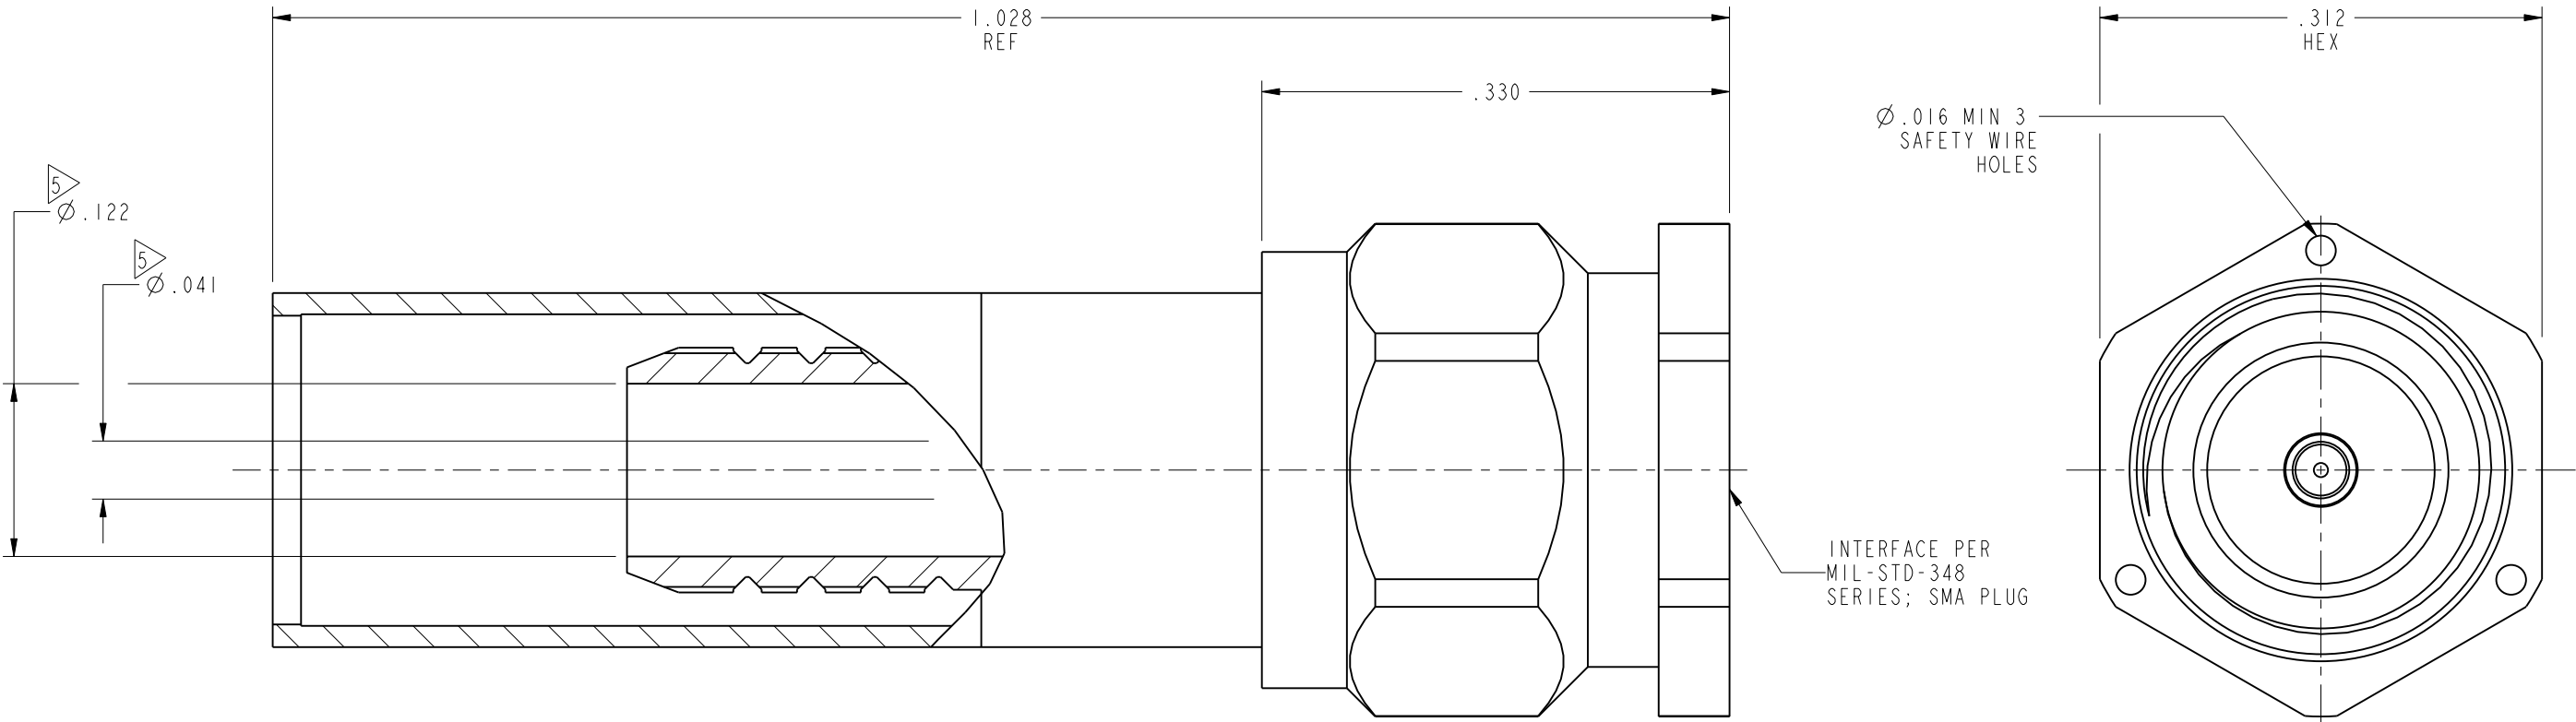

RECOMMENDED CABLE
STRIPPING DIMENSION

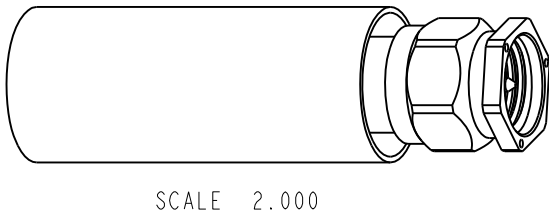

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN NISCHIT MV	DATE 12-Jun-09	TITLE SMA CONNECTOR CRIMP TYPE PLUG FOR RG400/U & RG 142B/U CABLE		Amphenol RF Danbury, CT, USA Tainan, Taiwan Shenzhen, China www.amphenolrf.com	
		ENGINEER RPA	DATE 6/29/71				
	REFERENCE	APPROVED K. CAPOZZI	DATE 8/10/09	SCALE: 8.0:1		SHEET 2 OF 2	
		CAD FILE I:SMA/ 901-101-15	CODE ID 74868	DWG SIZE B	DRAWING NO. 901-101-15	REV W	