


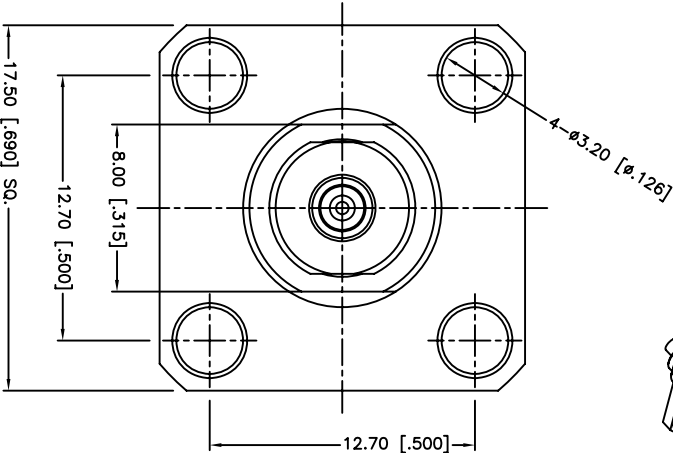


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/12/13	XXXXXX	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

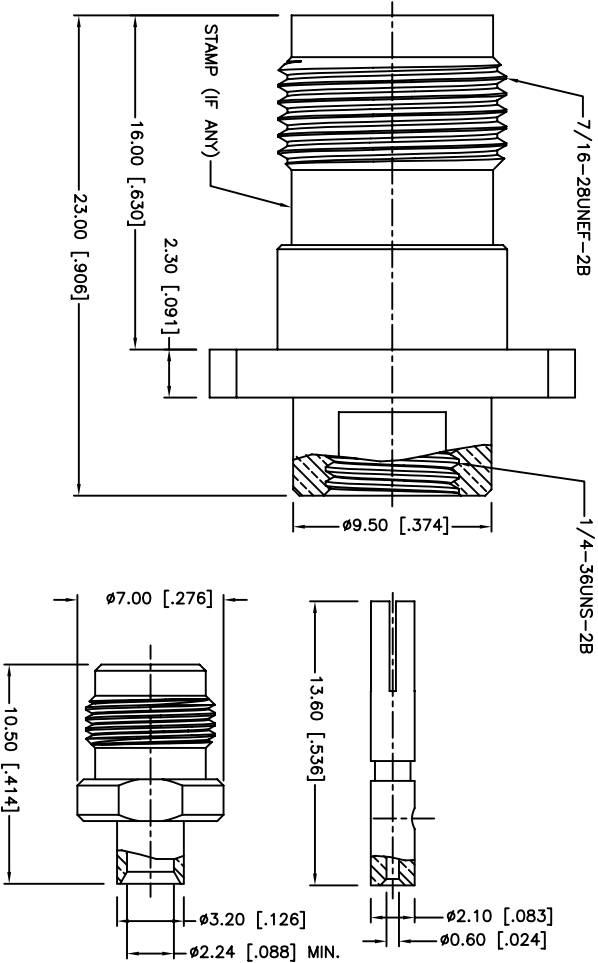

- NOTES:
1. IMPEDANCE:50 OHM
 2. FREQUENCY RANGE: DC 0 – 11 GHz
 3. DIELECTRIC WITHSTANDING VOLTAGE:1500 VRMS. MIN.
 4. DURABILITY:500 CYCLES MIN.
 5. TEMPERATURE RANGE:-65C TD +165C
 6. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:			
6	SOLDER NUT	BRASS	GOLD	1	DO NOT SCALE DRAWING	APPROVALS	DATE
5	INSULATOR	PTFE	NATURAL	1		DRAWN S.LI	03/12/13
4	LOCK RING	BRASS	NICKEL	1		CHECKED	
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1		ISSUED	
2	INSULATOR	PTFE	NATURAL	1		SHEET 1 OF 1	
1	BODY	BRASS	NICKEL	1			
DESCRIPTION				MATERIAL FINISH QTY			
				C:\CONNEX\122389.DWG			
				DWG. NO. 122389.DWG			
				REV. NC SIZE A SCALE NA			

Amphenol Connex

TNC PANEL DIRECT SOLDER JACK
(FOR .085",.086" CABLE)

PART NO. 122389