


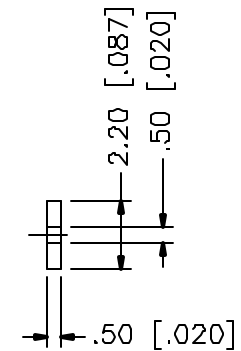


REV.	DATE	DESCRIPTION
NC	08/16/01	INITIAL RELEASE

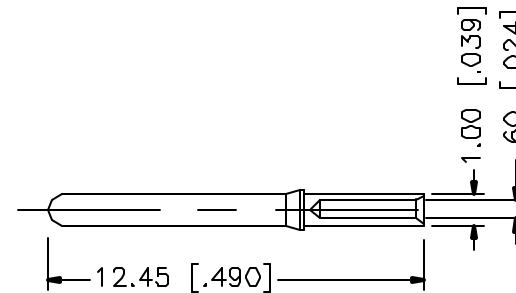

RECOMMENDED
CABLE STRIPPING DIM'S

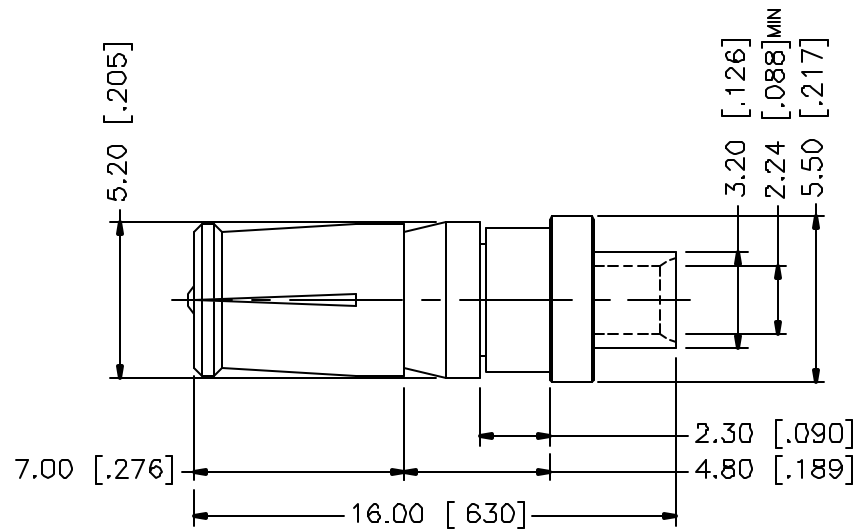

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE				
1 BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN GRS	08/16/01				
2 INSULATOR	TEFLON	NATURAL		REVISED		Connector Corporation D-SUB SEMI-RIGID JACK (RG .085", .086" SEMI RIGID CABLE)			
3 CONTACT PIN	PHOS. BRONZE	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED		SIZE	FSCM NO	DWG. NO	REV
4						A	99001	212109.DWG	NC
5									
6									
7									
8			DO NOT SCALE DRAWING			SCALE NA	PART NO.	212109	SHEET 1 OF 1