






REV.	DATE	DESCRIPTION
NC	08/03/98	INITIAL RELEASE
A	01/24/07	UPDATE DRAWING FORMAT



RECOMMENDED
MOUNTING HOLE

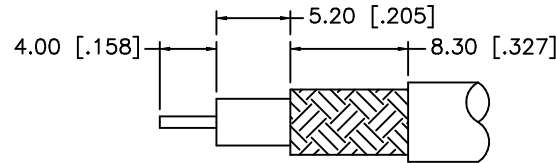

RECOMMENDED
CABLE STRIPPING DIM'S

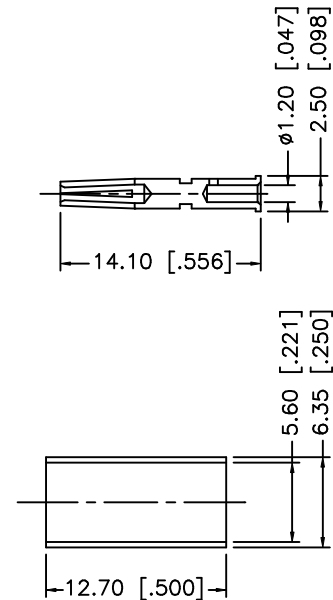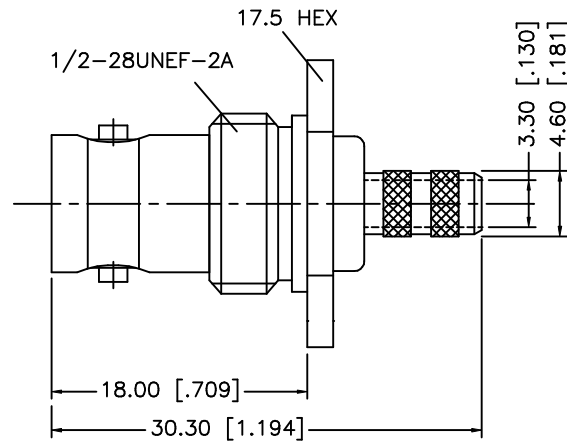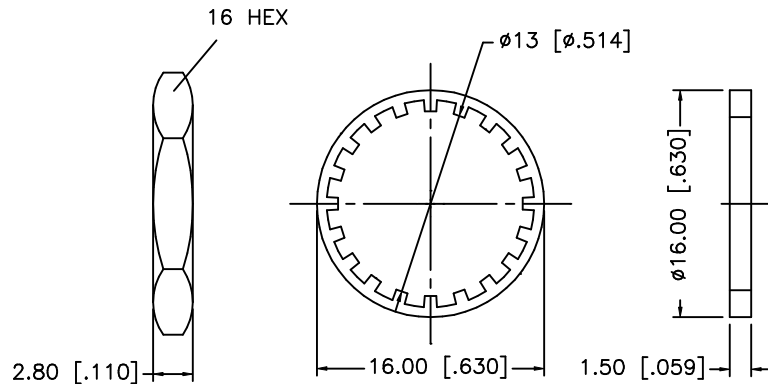

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

8	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
7	HEX NUT	BRASS	NICKEL	1		DRAWN	G.R.S.					01/24/07			
6	LOCK WASHER	BRASS	NICKEL	1		CHECKED									
5	GASKET	SILICONE	RED	1		ISSUED			PART DESCRIPTION						
4	INSULATOR	TEFLON	NATURAL	1		SHEET	1 OF 1		BNC BULKHEAD CRIMP JACK – LMR200						
3	CONTACT PIN	PHOS. BRONZE	GOLD	1					PART NO.						
2	INSULATOR	TEFLON	NATURAL	1					112600						
1	BODY	BRASS	NICKEL	1					DWG. NO.	112600.DWG	REV.	A	SIZE	A	SCALE
DESCRIPTION					MATERIAL	FINISH	QTY	C:/112/112600.DWG							