


PRODUCT DATA DRAWING
CUI BASIC

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	REV. DCN 32243	11/29/04	STW
B	REV. DCN 35434	10/05/07	STW
C	DCN 47339	04/18	STW

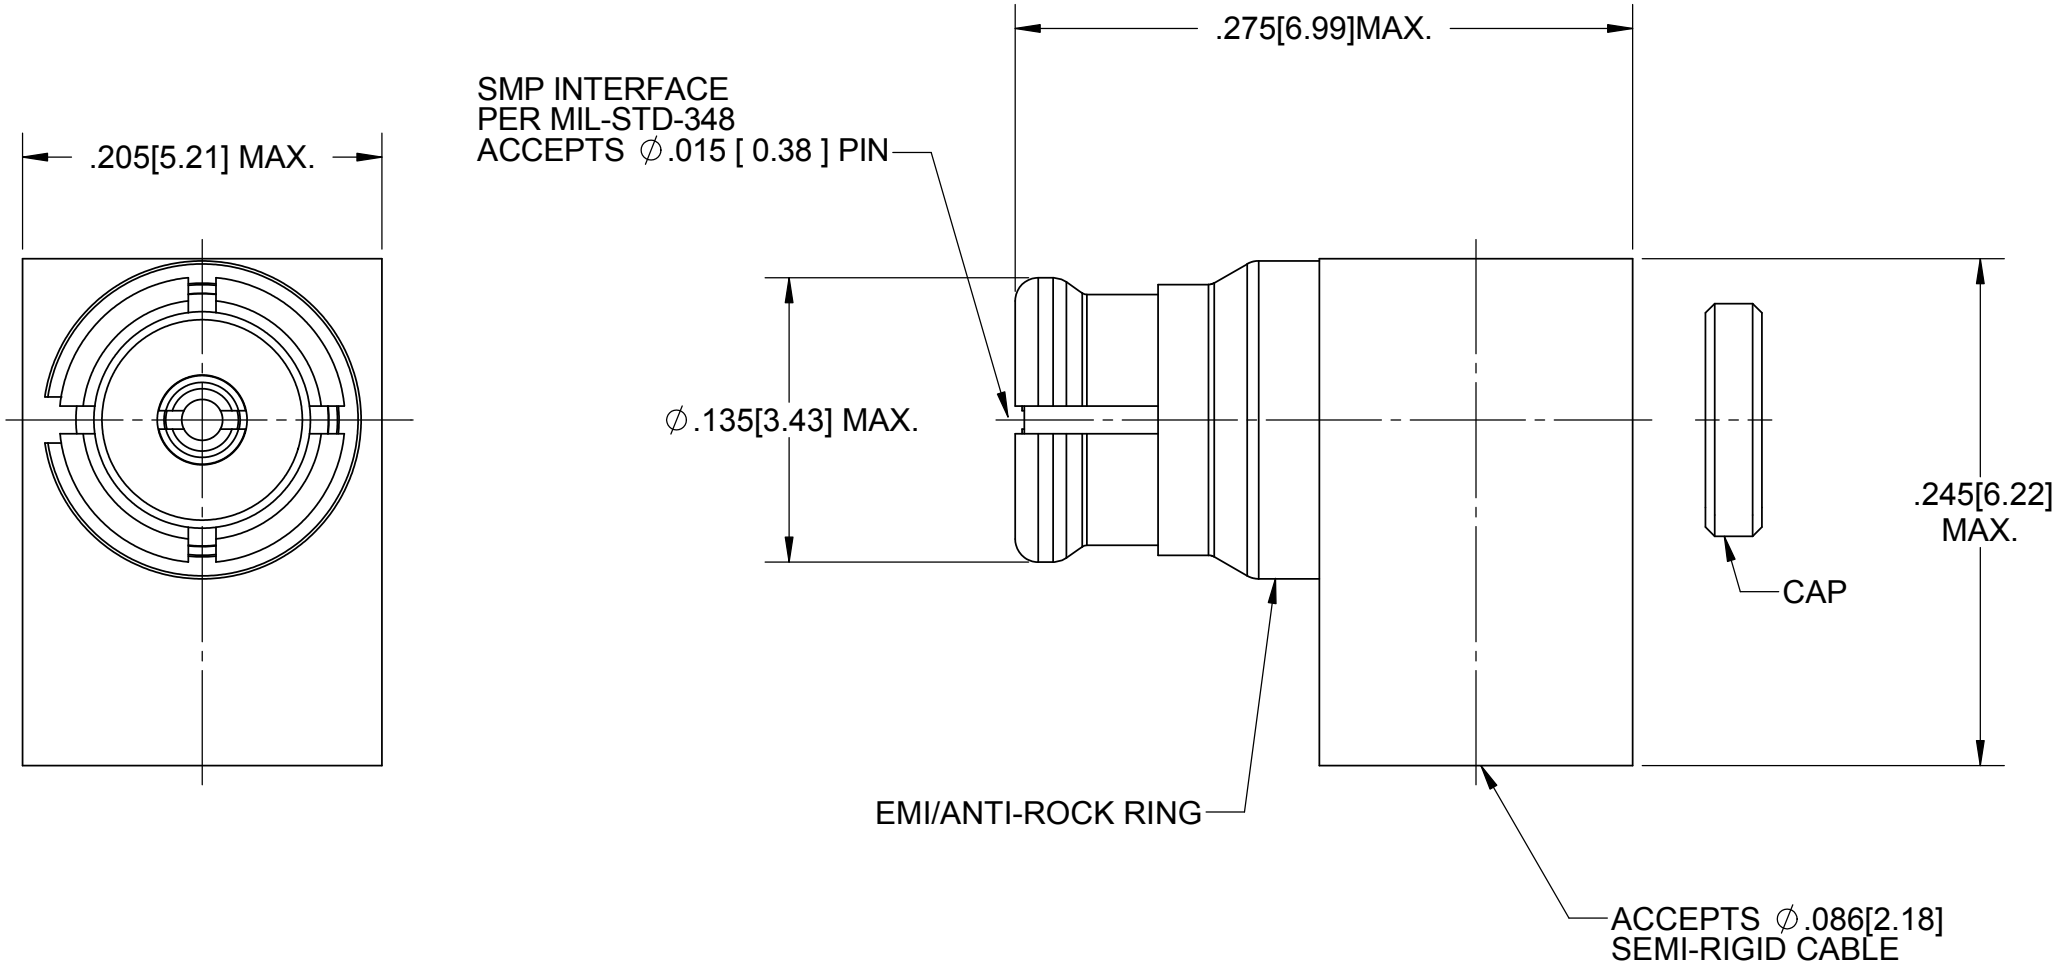

MATERIALS;
BODY, CONTACT,
EMI-RING, CAP &
ANTI-ROCK RING: BERYLLIUM COPPER PER ASTM B196
INSULATOR: PTFE PER ASTM D1710

FINISHES:
BODY, CONTACT,
EMI-RING, CAP &
ANTI-ROCK RING: GOLD PER MIL-DTL-45204, TYPE II
GRADE C, CLASS 1, OVER NICKEL
PER AMS-QQ-N-290, CLASS 1 .000050 MIN.

ELECTRICAL:
IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 26.5 GHZ
D.W.V.: 500 VOLTS DC
INSULATION RES.: 5,000 MEGOHMS MINIMUM

REF. DSCC 94008ZCG-3

DIMENSIONS ARE IN INCHES WITH METRIC EQUIVALENTS IN BRACKETS [].

MATERIAL:	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIED	SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409	
FINISH: SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1'0" X°X' ±15'	1) ALL DIMENSIONS ARE AFTER PLATING. 2) BREAK CORNERS & EDGES .005 R. MAX. 3) CHAM. 1ST & LAST THREADS. 4) SURFACE ROUGHNESS 63 √ MIL-STD-10. 5) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6) REMOVE ALL BURRS		
SURFACE AREA: N/A	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	DRAWN: JMC 04/16/04	
PROPRIETARY	THIRD ANGLE PROJECTION	CHECKED: STW 05/21/04	TITLE: SMP R/A CABLE JACK FOR Ø.086 S.R. CABLE	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		APPROVED: STW 05/21/04	SIZE B	CAGE CODE 95077
		E.M. SIMULATION: N/A	DWG. NO. 1214-4001	
			SCALE: 12:1	SHEET 1 OF 1