
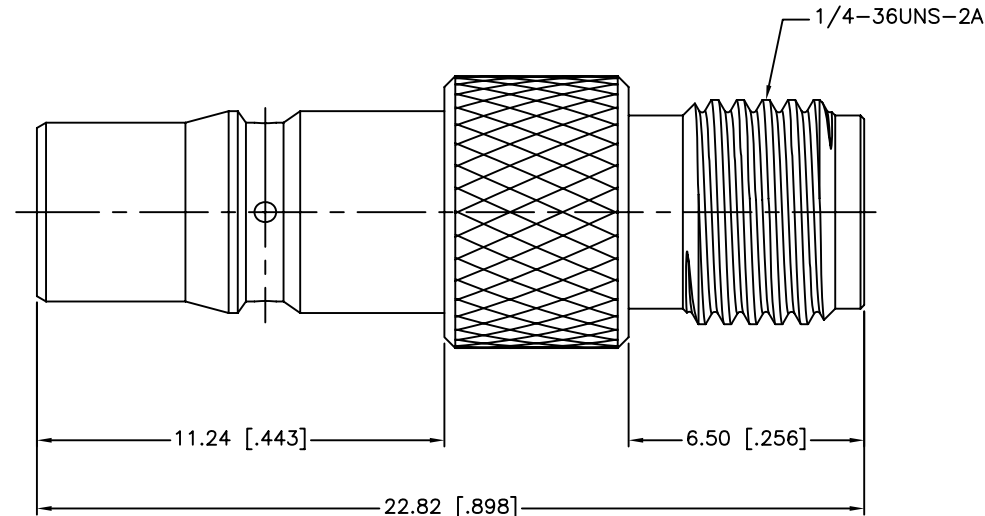


REV.	DATE	FOR NO.	DESCRIPTION
NC	05/02/12	XXXXXX	INITIAL RELEASE

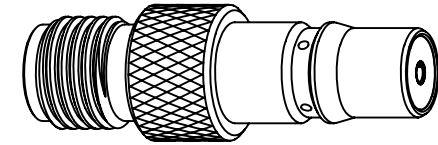

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0–18 GHz
3. VSWR(RETURN LOSS): 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 100 CYCLES MIN.
6. TEMPERATURE RANGE: –65°C TO +165°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex						
					DRAWN		M.ZHANG							05/02/12	
					CHECKED						PART DESCRIPTION QMA JACK TO SMA JACK ADAPTER (FOR 50 OHM)				
					ISSUED										
SHEET		1 OF 1				PART NO. 242262									
CAD FILE		C:/CONNEX/242262.DWG													
DESCRIPTION					DWG. NO.		242262.DWG		REV.	NC	SIZE	A	SCALE	NA	