
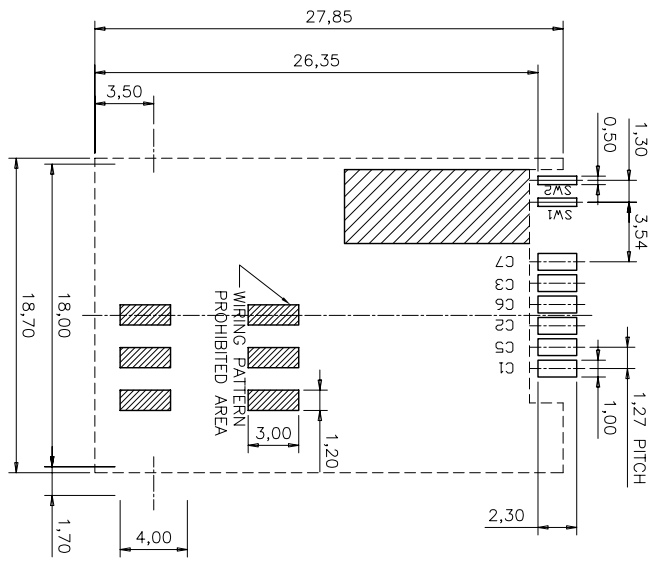
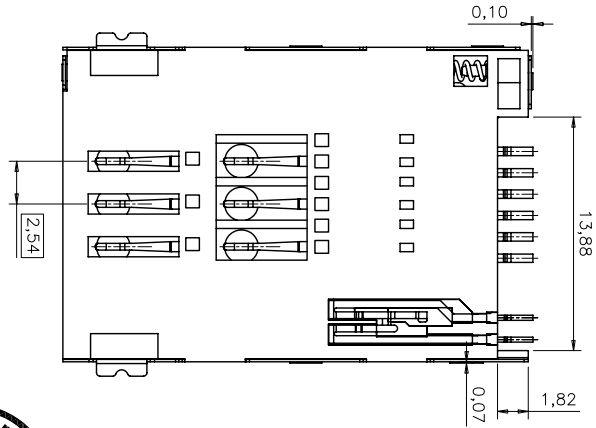
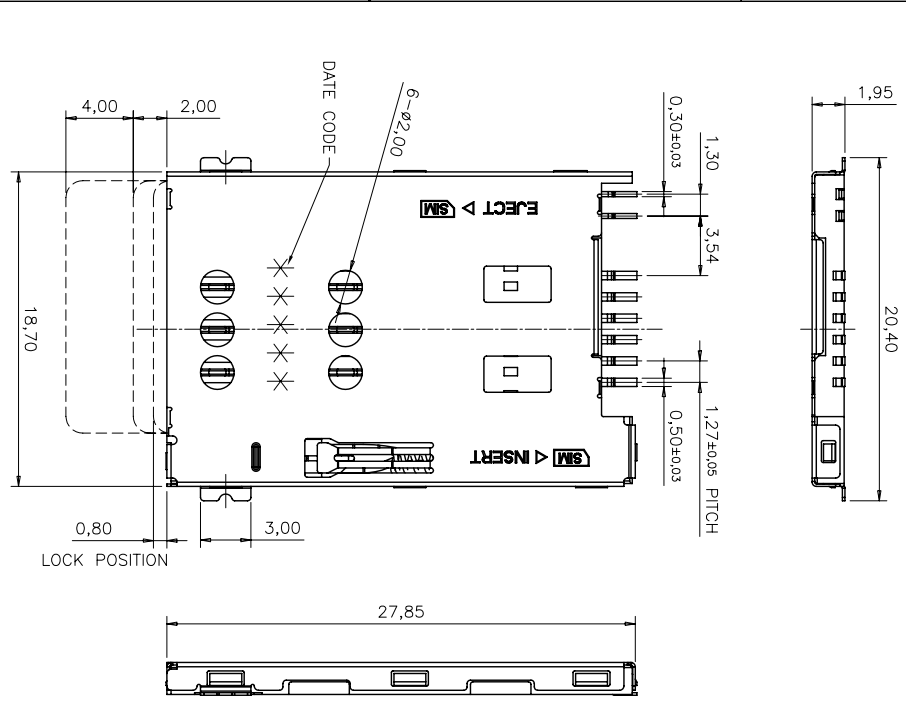


This document is the property of Amphenol Corporation and is loaned on the express condition that it is not to be released, reproduced or used, in whole or in part, for any purpose other than that for which it was loaned. It is to be returned to the originator when requested or when it is no longer needed. No part of this document is to be reproduced or to use any information in this document.

CUSTOMER DRAWING

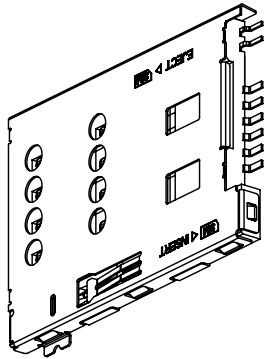

RECOMMENDED PCB LAYOUT(X:XX±0.05)
(TOP VIEW)

NOTE:
1. MATERIAL:
INSULATOR: HIGH TEMP. THERMOPLASTIC, U94V-0; COLOR: BLACK;
CONTACT: ALLOY COPPER, THICKNESS =0.15MM;
SWITCH: ALLOY COPPER, THICKNESS =0.10MM;
SHELL: STAINLESS STEEL, THICKNESS =0.15MM
2. PLATING:
CONTACT: 50u" MIN. NICKEL PLATED OVERALL,
SEE ORDER P/N FOR MATING AREA,
120u" MIN. Tin ON SOLDER TAILS;
SHELL: 50u" NICKEL PLATED OVERALL;
GOLD FLASH ON SOLDER LATCH;
3. THE COMPLAINTY IS 0.10MM MAX FOR ALL SOLDER TAILS;
4. MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC# SSN001.

REVISIONS			
SYM	ECN	DESCRIPTION	DATE
A	HK4434	RELEASE TO CUSTOMER	04/05/07
B	HK****	RELEASE TO CUSTOMER	06/25/07

UNLESS OTHERWISE SPECIFIED			
TOLERANCES		APPROVAL	
U.S.		DRAWN	DATE
X	+/-	Johnson, Yoo	06/25/07
XX	+/-	CHECKED	DB-Gao
XXX	+/-		06/25/07
ANGLES	+/-		
FOR MATERIALS AND FINISHES			
SEE NOTE 1			
REMOVE SHARP EDGES			
DRAWING FILE :			
D:\AMPHENOL\SALES\AMPHENOL-X-2006			
ANGLE OF PROJECTION			
SIZE			
A3	C	CAD-06-PA-001-X	REV. B
SCALE			
NONE			
SHEET 1 OF 1			

Amphenol

6PIN PUSH BUTTON SIM CARD READER
(WITH SWITCH)