



NOTES:

- MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY – BRASS, NICKEL PLATING
CONTACT – BRASS, GOLD PLATING
INSULATOR – PTFE, NATURAL
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: – 65°C to +165°C
- FOR CABLE STRIPPING AND ASSY. INSTRUCTIONS SEE 349–50328.

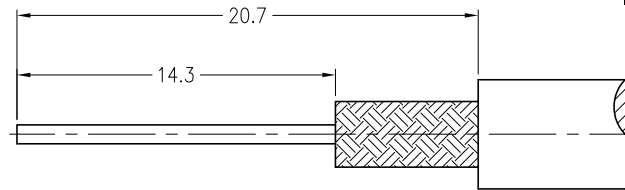

RECOMMENDED
CABLE STRIPPING DIM'S

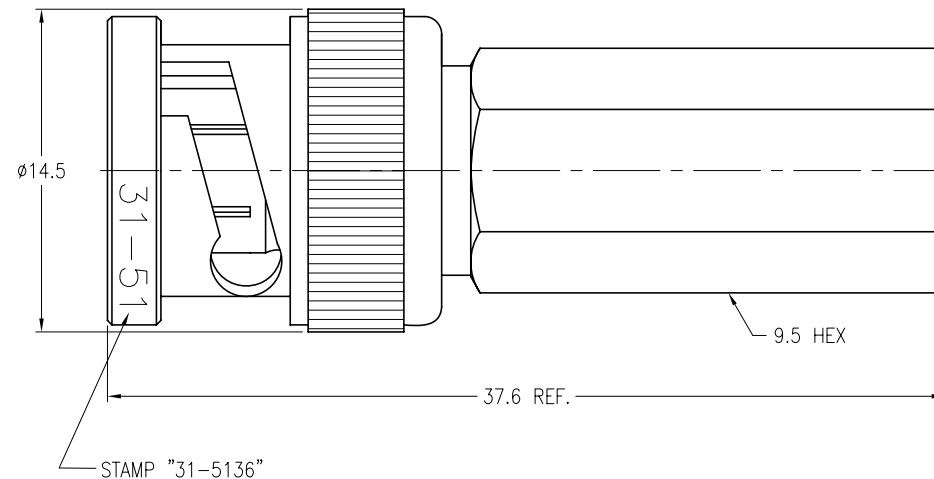

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 – 6mm ±0.05mm 6 – 30mm ±0.1mm 30 – 120mm ±0.2mm ANGLES ±1°	MATERIAL	DRAWN	DATE	TITLE			Amphenol RF	
		T.DENG	13-Jan-10				Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
		ENGINEER	DATE	(FOR RG-59/U & RG-62/U CABLE)			DRAWING NO. 31-5136	
		C.WANG	13-Jan-10				ITEM NO. 31-5136	
		APPROVED	DATE	SCALE: 3/1	SHEET 2 OF 2		PART NO. 31-5136	
S.HSIEH	14-Jan-10							
NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	CAD FILE	DWG SIZE	CODE ID	REV			
		F:\DWG\CNPD\31\5136-USZ	B	74868	U			
FINISH								