
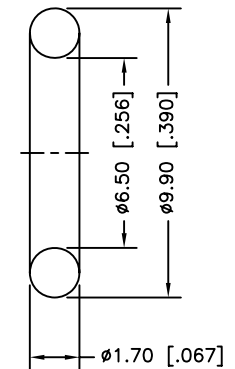
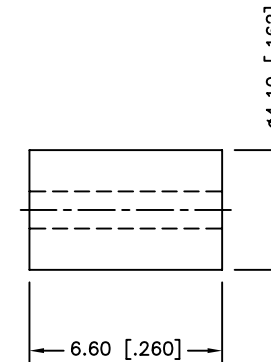
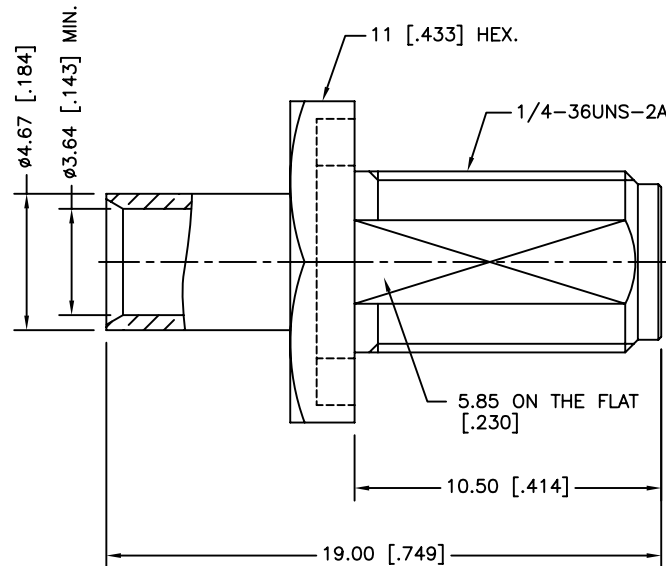

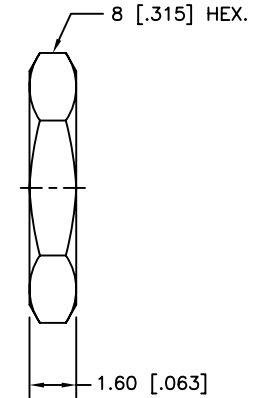


REV.	DATE	FOR NO.	DESCRIPTION
NC	01/02/08	XXXXXX	INITIAL RELEASE
A	04/21/12	XXXXXX	ADD RECOMMENDED MOUNTING HOLE

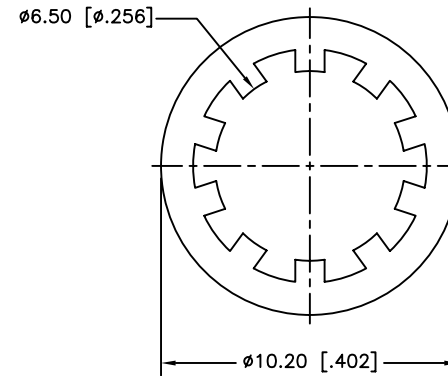

- CONTACT PIN TO SOLDER
- MAX. PANEL THICKNESS=2.4mm

6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	GASKET	SILICON RUBBER	RED	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	04/21/12
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/132106RP.DWG	

Amphenol Connex			
PART DESCRIPTION			
SMA REVERSE POLARITY DIRECT SOLDER BULKHEAD JACK (FOR .141" SEMI-RIGID CABLE)			
PART NO. 132106RP			
DWG. NO. 132106RP.DWG	REV. A	SIZE A	SCALE NA