

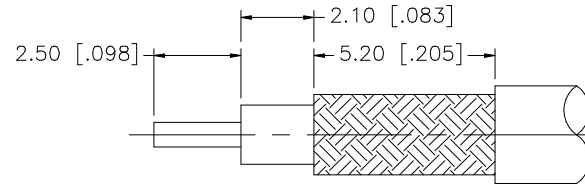
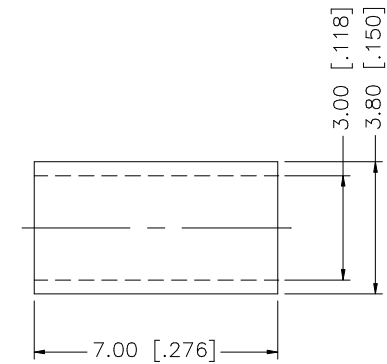


REV.	DATE	DESCRIPTION
A	01/13/99	UPDATE DRAWING
B	05/01/04	UPDATE DRAWING FORMAT
C	11/28/06	NOTE 2: CONTACT PIN TO SOLDER.

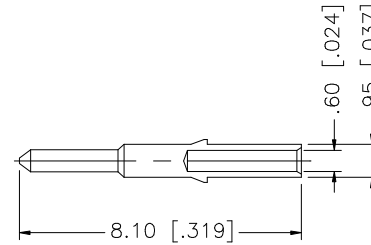

RECOMMENDED CABLE
STRIPPING DIMENSIONS

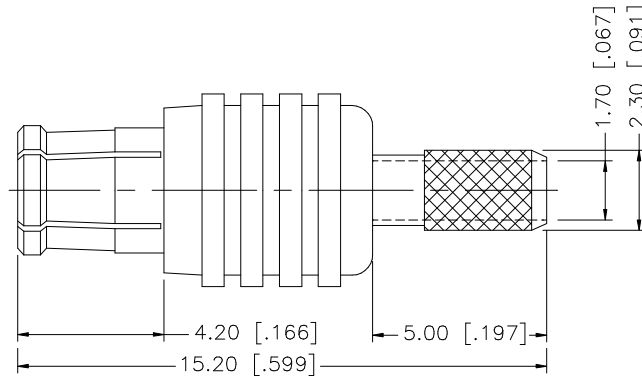

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S.	11/28/06						
6						CHECKED				PART DESCRIPTION MCX CRIMP PLUG (FOR RG–174/U,188A/U,316/U)				
5	FERRULE	COPPER	GOLD	1		ISSUED								
4	CONTACT PIN	BRASS	GOLD	1		SHEET		1 OF 1		PART NO. 252103				
3	INSULATOR	TEFLON	NATURAL	1										
2	BODY	BER. COPPER	GOLD	1						DWG. NO. 252103.DWG REV. C SIZE A SCALE NA				
1	HOUSING	BRASS	GOLD	1										
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE C:/252/252103.DWG								