

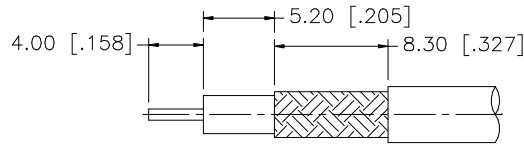





REV.	DATE	DESCRIPTION
NC	07/31/05	INITIAL RELEASE
A	11/02/05	ADD 141/U CABLE TO DESCRIPTION



RECOMMENDED
CABLE STRIPPING DIM'S

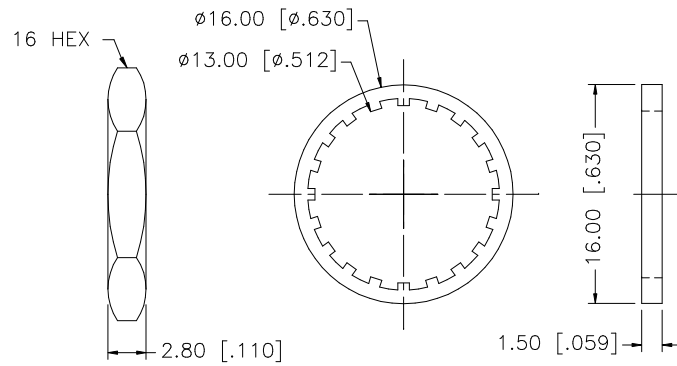

RECOMMENDED
MOUNTING HOLE

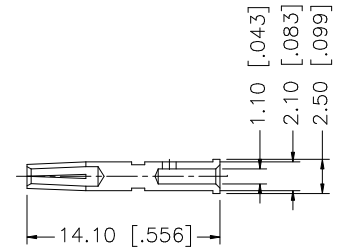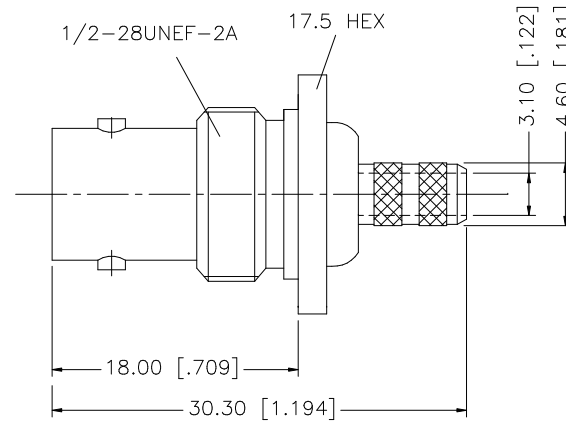

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
3. MAX. PANEL THICKNESS = 3.5mm

9					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.						11/02/05		
7	FERRULE	COPPER	NICKEL	1		CHECKED								PART DESCRIPTION	
6	HEX NUT	BRASS	NICKEL	1					BNC BULKHEAD CRIMP JACK (FOR RG58/U, 141/U CABLE)						
5	LOCK WASHER	BRASS	NICKEL	1					PART NO.	112202					
4	GASKET	RUBBER	RED	1											
3	CONTACT PIN	PHOS. BRONZE	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	NICKEL	1											
DESCRIPTION		MATERIAL	FINISH	QTY		CAD FILE	C:/112/112202.DWG	DWG. NO.	112202.DWG	REV.	A	SIZE	A	SCALE	NA