

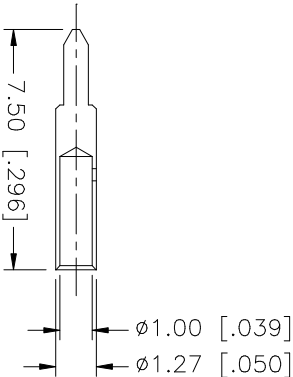


REV.	DATE	DESCRIPTION
C	04/31/03	UPDATE DRAWING FORMAT

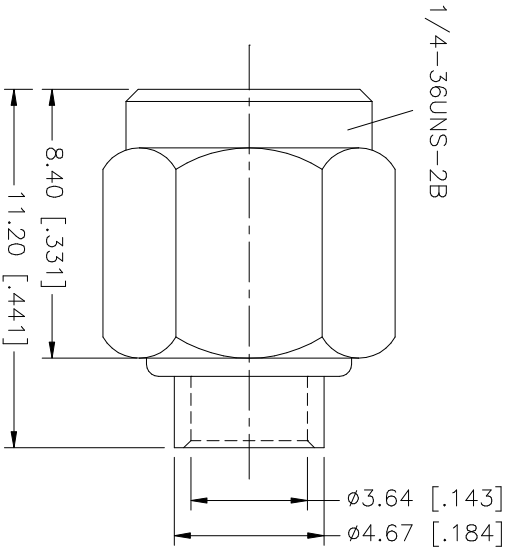

RECOMMENDED CABLE
STRIPPING DIMENSIONS

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	PART DESCRIPTION	
8									
7									
6									
5									
4	RETAINER RING	SILICONE	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN G.R.S.	04/31/03	SMA SEMI-RIGID PLUG (FOR .141" SEMI-RIGID CABLE)	
3	CONTACT PIN	BER. COPPER	NATURAL	1					
2	INSULATOR	BRASS	GOLD	1					
1	SHELL/BODY	TEFLON	NATURAL	1					
		BRASS	GOLD	1					
	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"	DO NOT SCALE DRAWING	CAD FILE C:/132/132102.DWG	PART NO. 132102	
					DWG. NO.	132102.DWG	REV. C	SIZE A	SCALE NA