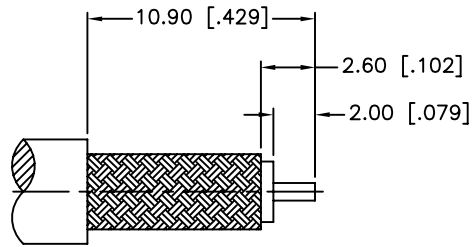
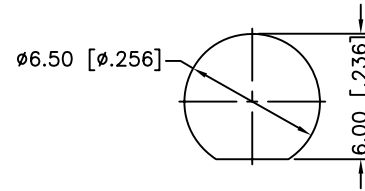
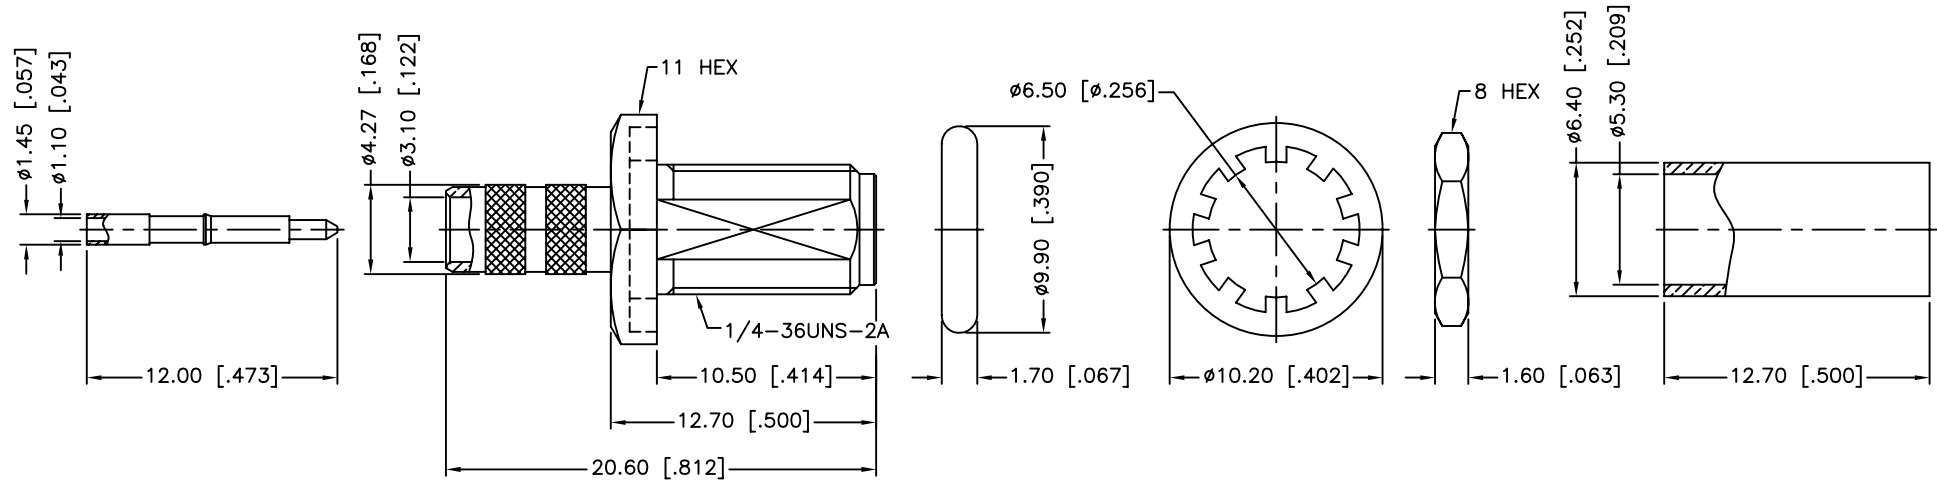


REV.	DATE	FOR NO.	DESCRIPTION
NC	06/16/09	XXXXXX	INITIAL RELEASE

RECOMMENDED
CABLE STRIPPING DIM'SRECOMMENDED
MOUNTING HOLE

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS=2.4mm

8	FERRULE	BRASS	GOLD	1
7	CONTACT PIN	BRASS	GOLD	1
6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	GASKET	SILICONE	RED	1
3	RING	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mmUNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 $\pm$ 0.007"
.315 - 1.180 $\pm$ 0.015"
1.180 - 4.724 $\pm$ 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/16/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	
C:/CONNEX/132280RP.DWG	

Amphenol Connex

PART DESCRIPTION

SMA BULKHEAD CRIMP JACK
(FOR RG-58C/U, 58/U)

PART NO.

132280RP

DWG. NO. 132280RP.DWG

REV. NC

SIZE A

SCALE NA