


- NOTES:
- MATERIALS AND FINISHES:
BODY – BRASS, NICKEL PLATING
CONTACT – BRASS, SILVER PLATING
INSULATOR – PTFE, NATURAL
 - MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C to +165°C

THIRD ANGLE PROJ.		REVISIONS			
REV	DESCRIPTION	DATE	ECO	APPR	
A2	SEE SHEET 1	11-Oct-04	--	AFSUN	
B	SEE SHEET 1	28-Dec-06	--	TERRY	
C	SEE SHEET 1	28-Dec-06	--	JEKY	
D	SEE SHEET 1	06-Mar-08	--	SUSAN	
AC	REDRAWN TO UPDATE FORMAT	11-Feb-08	47242	SH	
AD	SEE SHEET 1	22-Dec-09	47888	SH	
AE	STAMP "AMPHENOL" WAS "74868"\RD-DM11120601R3	26-Dec-11	48842	SH	

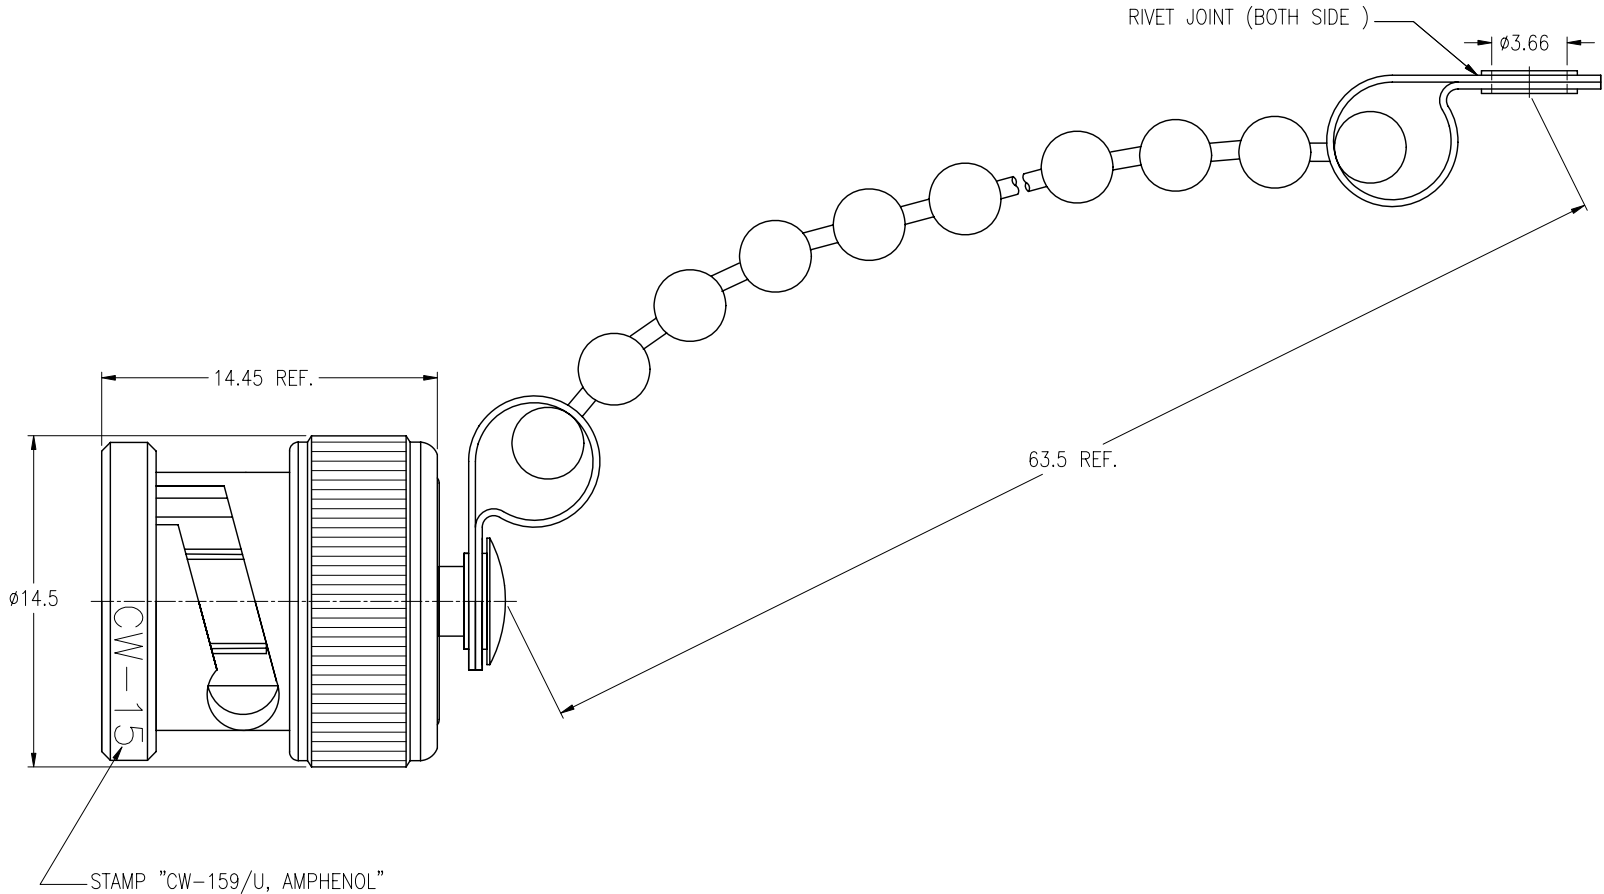

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ±0.05mm 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ± 0.3mm ANGLES ±1°	MATERIAL	DRAWN R.MAO	DATE 12-Dec-11	TITLE CW-159/U SHORTING PLUG		Amphenol RF	
	REFERENCE	ENGINEER C.WANG	DATE 14-Dec-09			Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
		APPROVED S.HSIEH	DATE 12-Dec-11	SCALE: 3/1	SHEET 2 OF 2	DRAWING NO. 31-17	ITEM NO. 31-17
	FINISH	F:\DWG\CNPD\31\17-AESZ		DWG SIZE B	CODE ID 74868	REV AE	PART NO. 31-17