
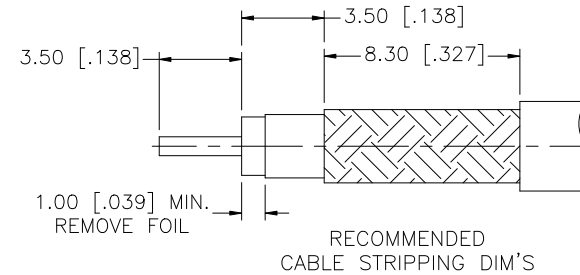
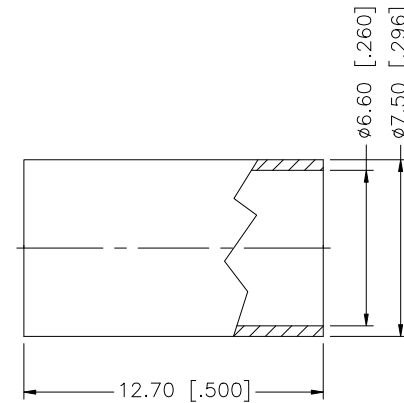


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/30/04	—	INITIAL RELEASE
A	02/22/09	—	REVISE CENTER CONTACT PIN LENGTH

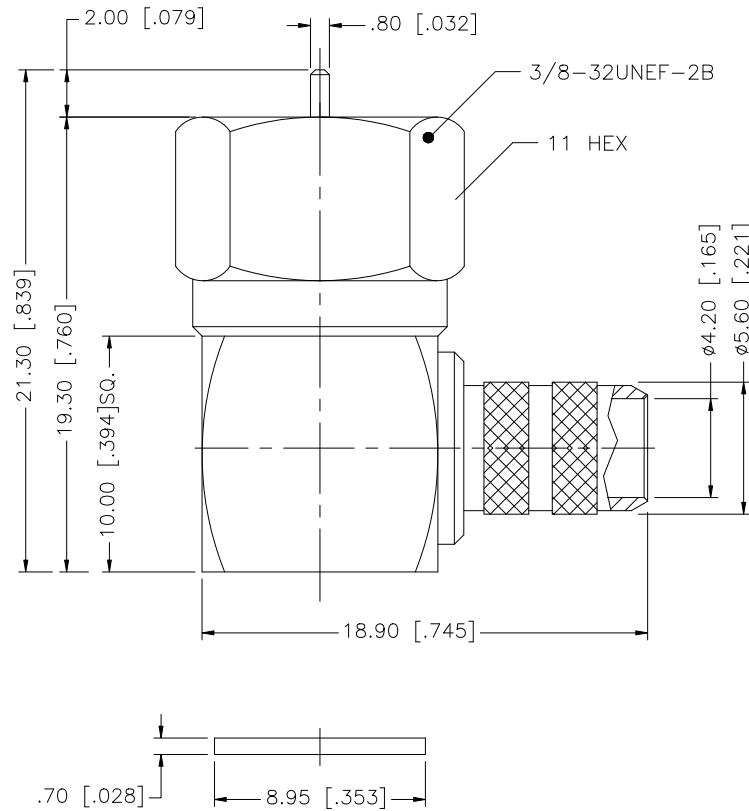

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48].

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex						
8						DRAWN	GRS						02/22/09	
7						CHECKED							PART DESCRIPTION F R/A CRIMP PLUG (FOR LMR-240 CABLE – 75ohm)	
6	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	ISSUED			PART NO. 222196					
5	COVER	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1	OF 1						DWG. NO. 222196.DWG REV. A SIZE A SCALE NA
4	CONTACT PIN	BRASS	GOLD	1		CAD FILE		C:/222/222196.DWG						
3	INSULATOR	PTFE	NATURAL	1	DO NOT SCALE DRAWING									
2	BODY	BRASS	NICKEL	1										
1	HOUSING	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										