




REV.	DATE	ECR. NO.	DESCRIPTION
A	04/16/12	2305	ADD D-FLAT IDENTIFICATION, UPDATE DRAWING FORMAT

RECOMMENDED
CABLE STRIPPING DIM'S

SCALE 1.000

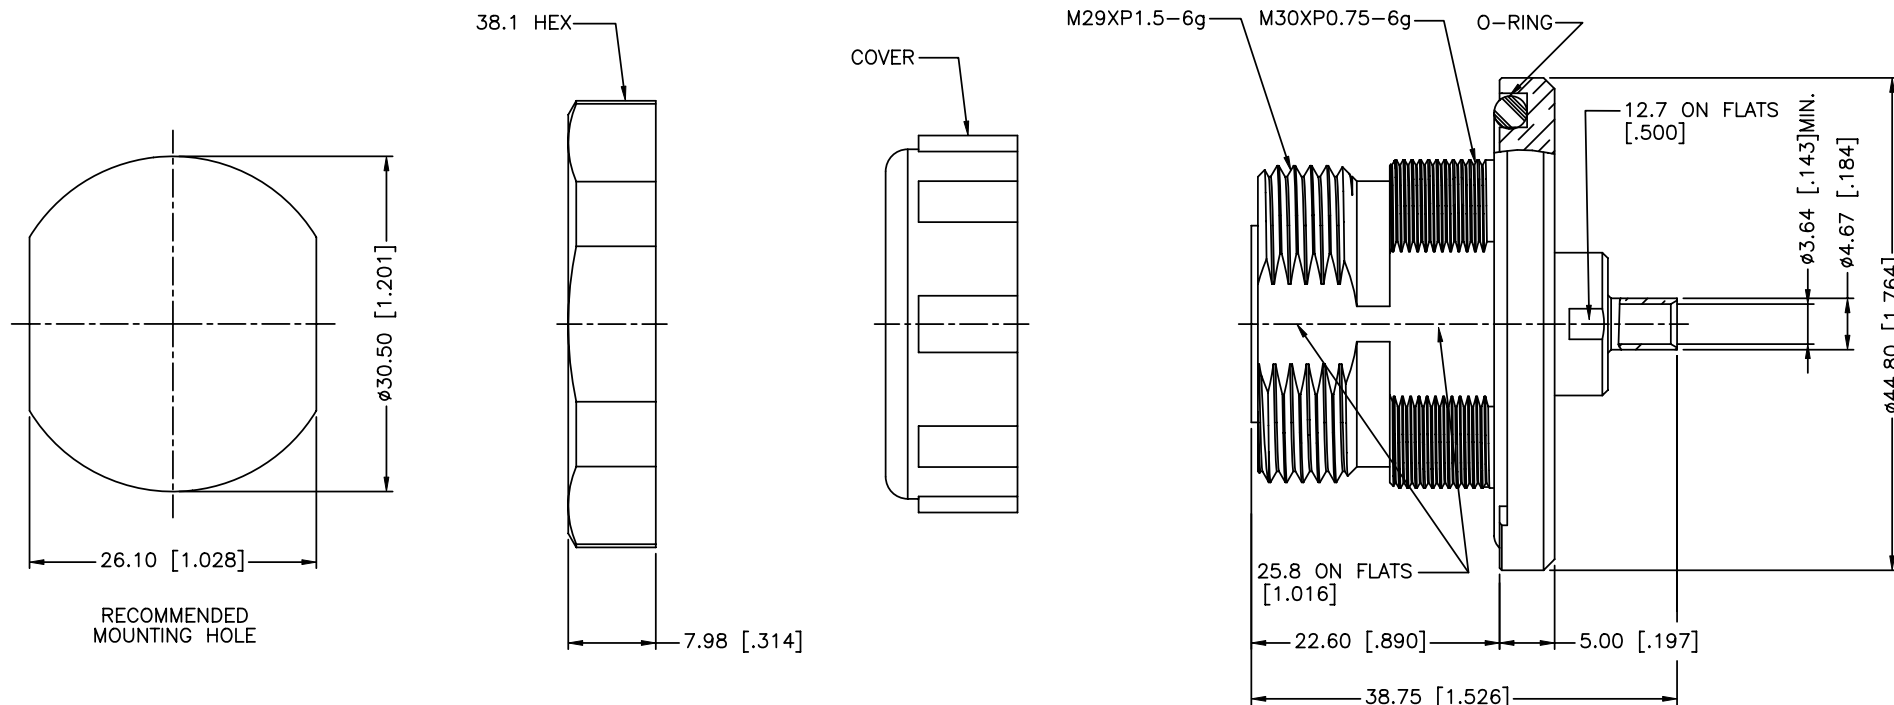

8	NUT-HEX	BRASS	SILVER	1
7	COVER	PE	BLUE	1
6	O-RING	N.B.R.	BLACK	1
5	BARREL	BRASS	SILVER	1
4	CONTACT PIN	BERYLLIUM COPPER	SILVER	1
3	CONTACT PIN	BERYLLIUM COPPER	SILVER	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	SILVER	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mmUNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 = $\pm$ 0.007"
.315 - 1.180 = $\pm$ 0.015"
1.180 - 4.724 = $\pm$ 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN R.MAO	04/16/12
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/272158-10.DWG

Amphenol Connex

PART DESCRIPTION

7/16 DIRECT SOLDER BULKHEAD JACK
(FOR .141" SEMI-RIGID CABLE)

PART NO.

272158-10

DWG. NO.

272158-10.DWG

REV. A

SIZE A

SCALE NA